



Cable assemblies, 3 pole, 1.5 mm²


Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 8.0 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05V2V2-F: PVC, contains halogen, continuous temperature 90 °C
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male



⊕ = GN/YE
 N = BU
 L = BN

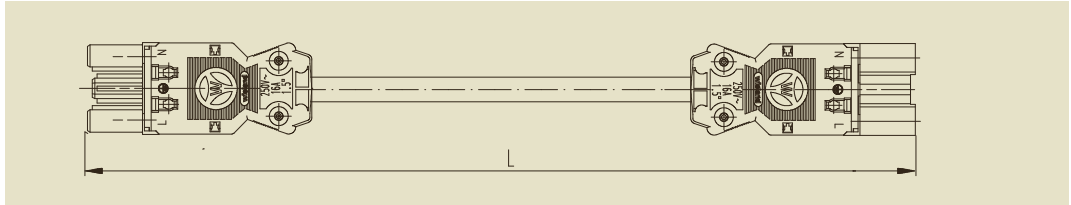

Cable black/coding		Length m	Cable H05VV-F			Cable H05V2V2-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 L, PE, N	1.0	92.232.1000.1	75		92.232.1010.1	75	
		2.0	92.232.2000.1	40		92.232.2010.1	40	
		3.0	92.232.3000.1	25		92.232.3010.1	25	
		4.0	92.232.4000.1	25		92.232.4010.1	25	
		5.0	92.232.5000.1	20		92.232.5010.1	20	
		6.0	92.232.6000.1	10		92.232.6010.1	10	
		7.0	92.232.7000.1	10		92.232.7010.1	10	
		8.0	92.232.8000.1	10		92.232.8010.1	10	

Cable white/coding		Length m	Cable H05VV-F			Cable H05V2V2-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 L, PE, N	1.0	92.232.1000.2	75		92.232.1010.2	75	
		2.0	92.232.2000.2	40		92.232.2010.2	50	
		3.0	92.232.3000.2	25		92.232.3010.2	25	
		4.0	92.232.4000.2	25		92.232.4010.2	25	
		5.0	92.232.5000.2	20		92.232.5010.2	20	
		6.0	92.232.6000.2	10		92.232.6010.2	10	
		7.0	92.232.7000.2	10		92.232.7010.2	10	
		8.0	92.232.8000.2	10		92.232.8010.2	10	

Cable black/coding		Length m	Cable H05VV-F			Cable H05V2V2-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
pebble gray	Code 2 L, PE, N	1.0	92.232.1000.3	75		92.232.1010.3	75	
		2.0	92.232.2000.3	40		92.232.2010.3	50	
		3.0	92.232.3000.3	25		92.232.3010.3	25	
		4.0	92.232.4000.3	25		92.232.4010.3	25	
		5.0	92.232.5000.3	20		92.232.5010.3	20	
		6.0	92.232.6000.3	10		92.232.6010.3	10	
		7.0	92.232.7000.3	10		92.232.7010.3	10	
		8.0	92.232.8000.3	10		92.232.8010.3	10	

Cable black/coding		Length m	Cable H05VV-F			Cable H05V2V2-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
salmon red	Code 3 L, PE, N	1.0	92.232.1000.5	75		92.232.1010.5	75	
		2.0	92.232.2000.5	40		92.232.2010.5	50	
		3.0	92.232.3000.5	25		92.232.3010.5	25	
		4.0	92.232.4000.5	25		92.232.4010.5	25	
		5.0	92.232.5000.5	20		92.232.5010.5	20	
		6.0	92.232.6000.5	10		92.232.6010.5	10	
		7.0	92.232.7000.5	10		92.232.7010.5	10	
		8.0	92.232.8000.5	10		92.232.8010.5	10	


Cable black/coding		Length m	Cable H05VV-F		
			Part No.	P. U.	Price
brown	Code 4 3/L, 2/N, 1 1, 2/N, 3/L	1.0	92.232.1000.4	50	
		2.0	92.232.2000.4	30	
		3.0	92.232.3000.4	25	
		4.0	92.232.4000.4	20	
		5.0	92.232.5000.4	15	
		6.0	92.232.6000.4	15	
		7.0	92.232.7000.4	10	
		8.0	92.232.8000.4	10	



1 = BK
 2/N = GY
 3/L = BN

Other cables, other lengths, other codings on request


Cable assemblies, 3 pole, 1.5 mm²

Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 8.0 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05V2V2-F: PVC, contains halogen, continuous temperature 90 °C
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables female – free end

Wire ends ultrason. welded

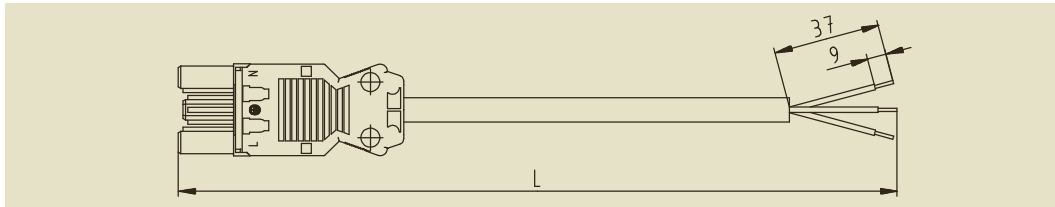

⊕ = GN/YE
 N = BU
 L = BN



Cable black/coding		Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 N, PE, L	1.0	92.232.1003.1	75		92.232.1013.1	75	
		2.0	92.232.2003.1	50		92.232.2013.1	50	
		3.0	92.232.3003.1	25		92.232.3013.1	25	
		4.0	92.232.4003.1	25		92.232.4013.1	25	
		5.0	92.232.5003.1	20		92.232.5013.1	20	
		6.0	92.232.6003.1	10		92.232.6013.1	10	
		7.0	92.232.7003.1	10		92.232.7013.1	10	
		8.0	92.232.8003.1	10		92.232.8013.1	10	

Cable white/coding		Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 N, PE, L	1.0	92.232.1003.2	75		92.232.1013.2	75	
		2.0	92.232.2003.2	50		92.232.2013.2	50	
		3.0	92.232.3003.2	25		92.232.3013.2	25	
		4.0	92.232.4003.2	25		92.232.4013.2	25	
		5.0	92.232.5003.2	20		92.232.5013.2	20	
		6.0	92.232.6003.2	10		92.232.6013.2	10	
		7.0	92.232.7003.2	10		92.232.7013.2	10	
		8.0	92.232.8003.2	10		92.232.8013.2	10	

Cable black/coding		Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
pebble gray	Code 2 N, PE, L	1.0	92.232.1003.3	75		92.232.1013.3	75	
		2.0	92.232.2003.3	50		92.232.2013.3	50	
		3.0	92.232.3003.3	25		92.232.3013.3	25	
		4.0	92.232.4003.3	25		92.232.4013.3	25	
		5.0	92.232.5003.3	20		92.232.5013.3	20	
		6.0	92.232.6003.3	10		92.232.6013.3	10	
		7.0	92.232.7003.3	10		92.232.7013.3	10	
		8.0	92.232.8003.3	10		92.232.8013.3	10	

Cable black/coding		Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
salmon red	Code 3 N, PE, L	1.0	92.232.1003.5	75		92.232.1013.5	75	
		2.0	92.232.2003.5	50		92.232.2013.5	50	
		3.0	92.232.3003.5	25		92.232.3013.5	25	
		4.0	92.232.4003.5	25		92.232.4013.5	25	
		5.0	92.232.5003.5	20		92.232.5013.5	20	
		6.0	92.232.6003.5	10		92.232.6013.5	10	
		7.0	92.232.7003.5	10		92.232.7013.5	10	
		8.0	92.232.8003.5	10		92.232.8013.5	10	

Cable black/coding		Length m	Part No.	P. U.	Price
brown	Code 4 3/L, 2/N, 1	1.0	92.232.1003.4	50	
		2.0	92.232.2003.4	30	
		3.0	92.232.3003.4	25	
		4.0	92.232.4003.4	20	
		5.0	92.232.5003.4	15	
		6.0	92.232.6003.4	15	
		7.0	92.232.7003.4	10	
		8.0	92.232.8003.4	10	



1 = BK
 2/N = GY
 3/L = BN



Sheath strip length: 100 mm
 Wire stripping length: 12 mm



Other cables, other lengths, other codings on request

GST18i3

Cable assemblies, 3 pole, 1.5 mm²

Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 8.0 mm


Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05V2V2-F: PVC, contains halogen, continuous temperature 90 °C
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables male – free end

Wire ends ultrason. welded



⊕ = GN/YE
 N = BU
 L = BN

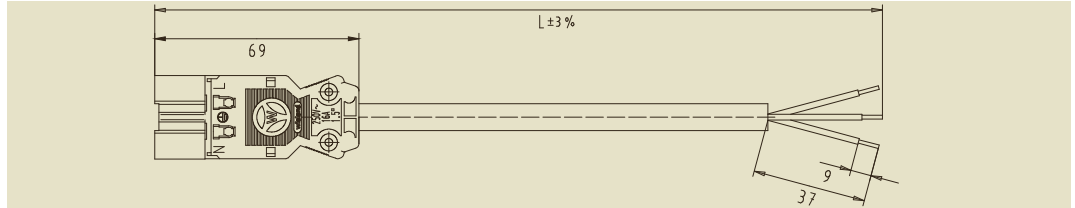

Cable H05VV-F				Cable H05V2V2-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 L, PE, N	1.0	92.232.1004.1	75	92.232.1014.1	75	
		2.0	92.232.2004.1	50	92.232.2014.1	50	
		3.0	92.232.3004.1	25	92.232.3014.1	25	
		4.0	92.232.4004.1	25	92.232.4014.1	25	
		5.0	92.232.5004.1	20	92.232.5014.1	20	
		6.0	92.232.6004.1	10	92.232.6014.1	10	
		7.0	92.232.7004.1	10	92.232.7014.1	10	
		8.0	92.232.8004.1	10	92.232.8014.1	10	

Cable H05VV-F				Cable H05V2V2-F			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 L, PE, N	1.0	92.232.1004.2	75	92.232.1014.2	75	
		2.0	92.232.2004.2	50	92.232.2014.2	50	
		3.0	92.232.3004.2	25	92.232.3014.2	25	
		4.0	92.232.4004.2	25	92.232.4014.2	25	
		5.0	92.232.5004.2	20	92.232.5014.2	20	
		6.0	92.232.6004.2	10	92.232.6014.2	10	
		7.0	92.232.7004.2	10	92.232.7014.2	10	
		8.0	92.232.8004.2	10	92.232.8014.2	10	

Cable H05VV-F				Cable H05V2V2-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
pebble gray	Code 2 L, PE, N	1.0	92.232.1004.3	75	92.232.1014.3	75	
		2.0	92.232.2004.3	50	92.232.2014.3	50	
		3.0	92.232.3004.3	25	92.232.3014.3	25	
		4.0	92.232.4004.3	25	92.232.4014.3	25	
		5.0	92.232.5004.3	20	92.232.5014.3	20	
		6.0	92.232.6004.3	10	92.232.6014.3	10	
		7.0	92.232.7004.3	10	92.232.7014.3	10	
		8.0	92.232.8004.3	10	92.232.8014.3	10	

Cable H05VV-F				Cable H05V2V2-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
salmon red	Code 3 L, PE, N	1.0	92.232.1004.5	75	92.232.1014.5	75	
		2.0	92.232.2004.5	50	92.232.2014.5	50	
		3.0	92.232.3004.5	25	92.232.3014.5	25	
		4.0	92.232.4004.5	25	92.232.4014.5	25	
		5.0	92.232.5004.5	20	92.232.5014.5	20	
		6.0	92.232.6004.5	10	92.232.6014.5	10	
		7.0	92.232.7004.5	10	92.232.7014.5	10	
		8.0	92.232.8004.5	10	92.232.8014.5	10	

Cable H05VV-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
brown	Code 3 1, 2/N, 3/L	1.0	92.232.1004.4	50	
		2.0	92.232.2004.4	30	
		3.0	92.232.3004.4	25	
		4.0	92.232.4004.4	20	
		5.0	92.232.5004.4	15	
		6.0	92.232.6004.4	15	
		7.0	92.232.7004.4	10	
		8.0	92.232.8004.4	10	






1 = BK
 2/N = GY
 3/L = BN

Sheath strip length: 100 mm
 Wire stripping length: 12 mm


Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 1.5 mm²

Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:   
 Cable diameter: 8.0 mm

Cable material, H05Z1Z1-F: halogen-free
 Cable material, RZ1-K 0.6/1kV: halogen-free
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male

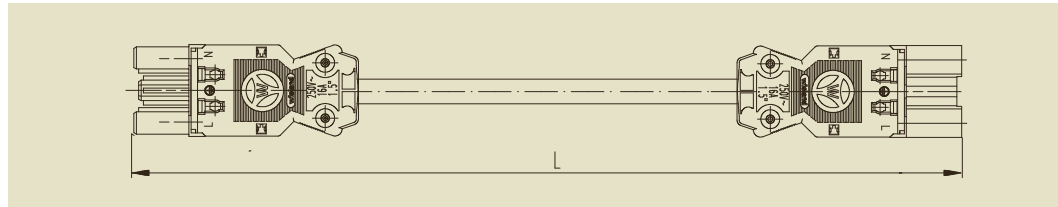

⊕ = GN/YE
 N = BU
 L = BN

Cable H05Z1Z1-F				Cable RZ1-K 0.6/1kV			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 L, PE, N	1.0	92.232.1060.1	75	G2.232.1060.1	50	
		2.0	92.232.2060.1	40	G2.232.2060.1	25	
		3.0	92.232.3060.1	25	G2.232.3060.1	20	
		4.0	92.232.4060.1	20	G2.232.4060.1	15	
		5.0	92.232.5060.1	15	G2.232.5060.1	10	
		6.0	92.232.6060.1	10	G2.232.6060.1	10	
		7.0	92.232.7060.1	10	G2.232.7060.1	10	
		8.0	92.232.8060.1	10	G2.232.8060.1	10	

Cable H05Z1Z1-F				Cable RZ1-K 0.6/1kV			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 L, PE, N	1.0	92.232.1060.2	75	G2.232.1060.2	50	
		2.0	92.232.2060.2	40	G2.232.2060.2	25	
		3.0	92.232.3060.2	25	G2.232.3060.2	20	
		4.0	92.232.4060.2	20	G2.232.4060.2	15	
		5.0	92.232.5060.2	20	G2.232.5060.2	10	
		6.0	92.232.6060.2	10	G2.232.6060.2	10	
		7.0	92.232.7060.2	10	G2.232.7060.2	10	
		8.0	92.232.8060.2	10	G2.232.8060.2	5	

Cable H05Z1Z1-F				
Cable black/coding	Length m	Part No.	P. U.	Price
pebble gray	Code 2 L, PE, N	1.0	92.232.1060.3	75
		2.0	92.232.2060.3	40
		3.0	92.232.3060.3	25
		4.0	92.232.4060.3	20
		5.0	92.232.5060.3	15
		6.0	92.232.6060.3	10
		7.0	92.232.7060.3	10
		8.0	92.232.8060.3	10

Cable H05Z1Z1-F				
Cable black/coding	Length m	Part No.	P. U.	Price
salmon red	Code 3 L, PE, N	1.0	92.232.1060.5	75
		2.0	92.232.2060.5	40
		3.0	92.232.3060.5	25
		4.0	92.232.4060.5	20
		5.0	92.232.5060.5	15
		6.0	92.232.6060.5	10
		7.0	92.232.7060.5	10
		8.0	92.232.8060.5	10

Cable H05Z1Z1-F				
Cable black/coding	Length m	Part No.	P. U.	Price
brown	Code 4 1, 2/N, 3/L	1.0	92.232.1060.4	75
		2.0	92.232.2060.4	40
		3.0	92.232.3060.4	25
		4.0	92.232.4060.4	20
		5.0	92.232.5060.4	15
		6.0	92.232.6060.4	10
		7.0	92.232.7060.4	10
		8.0	92.232.8060.4	10



1 = BK
 2/N = GY
 3/L = BN






GST18i3



Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 1.5 mm²

Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:   
 Cable diameter: 8.0 mm


Cable material, H05Z1Z1-F: halogen-free
 Cable material, RZ1-K 0.6/1kV: halogen-free
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables female – free end

Wire ends ultrason. welded



⊕ = GN/YE
 N = BU
 L = BN

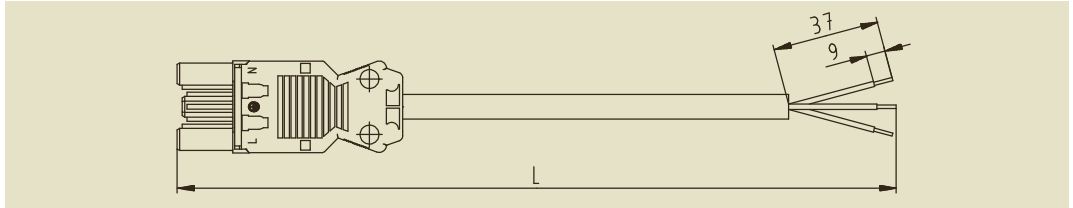

Cable H05Z1Z1-F					Cable RZ1-K 0.6/1kV		
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 N, PE, L	1.0	92.232.1063.1	75	G2.232.1063.1	50	
		2.0	92.232.2063.1	50	G2.232.2063.1	25	
		3.0	92.232.3063.1	25	G2.232.3063.1	20	
		4.0	92.232.4063.1	20	G2.232.4063.1	15	
		5.0	92.232.5063.1	20	G2.232.5063.1	10	
		6.0	92.232.6063.1	10	G2.232.6063.1	10	
		7.0	92.232.7063.1	10	G2.232.7063.1	8	
		8.0	92.232.8063.1	10	G2.232.8063.1	8	

Cable H05Z1Z1-F					Cable RZ1-K 0.6/1kV		
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 N, PE, L	1.0	92.232.1063.2	75	G2.232.1063.2	50	
		2.0	92.232.2063.2	50	G2.232.2063.2	25	
		3.0	92.232.3063.2	25	G2.232.3063.2	20	
		4.0	92.232.4063.2	20	G2.232.4063.2	15	
		5.0	92.232.5063.2	20	G2.232.5063.2	10	
		6.0	92.232.6063.2	10	G2.232.6063.2	10	
		7.0	92.232.7063.2	10	G2.232.7063.2	8	
		8.0	92.232.8063.2	10	G2.232.8063.2	8	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
pebble gray	Code 2 N, PE, L	1.0	92.232.1063.3	75	
		2.0	92.232.2063.3	50	
		3.0	92.232.3063.3	25	
		4.0	92.232.4063.3	25	
		5.0	92.232.5063.3	20	
		6.0	92.232.6063.3	10	
		7.0	92.232.7063.3	10	
		8.0	92.232.8063.3	10	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
salmon red	Code 3 N, PE, L	1.0	92.232.1063.5	75	
		2.0	92.232.2063.5	50	
		3.0	92.232.3063.5	25	
		4.0	92.232.4063.5	25	
		5.0	92.232.5063.5	20	
		6.0	92.232.6063.5	10	
		7.0	92.232.7063.5	10	
		8.0	92.232.8063.5	10	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
brown	Code 4 3/L, 2/N, 1	1.0	92.232.1063.4	75	
		2.0	92.232.2063.4	50	
		3.0	92.232.3063.4	25	
		4.0	92.232.4063.4	25	
		5.0	92.232.5063.4	20	
		6.0	92.232.6063.4	10	
		7.0	92.232.7063.4	10	
		8.0	92.232.8063.4	10	




1 = BK
 2/N = GY
 3/L = BN

Sheath strip length: 100 mm
 Wire stripping length: 12 mm

Other cables, other lengths, other codings on request


Cable assemblies, 3 pole, 1.5 mm²

Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 8.0 mm

Cable material, H05Z1Z1-F: halogen-free
 Cable material, RZ1-K 0.6/1kV: halogen-free
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables male – free end

Wire ends ultrason. welded

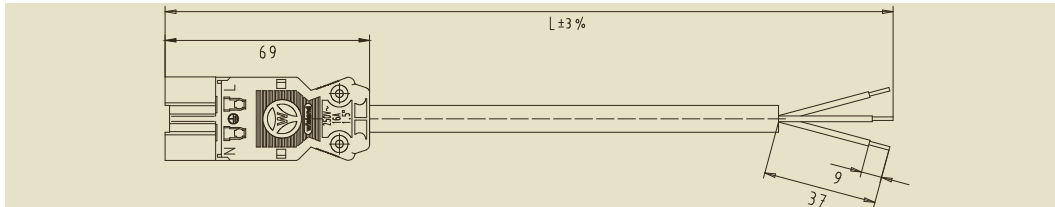

⊕ = GN/YE
 N = BU
 L = BN



Cable H05Z1Z1-F				Cable RZ1-K 0.6/1kV			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 L, PE, N	1.0	92.232.1064.1	75	G2.232.1064.1	50	
		2.0	92.232.2064.1	50	G2.232.2064.1	25	
		3.0	92.232.3064.1	25	G2.232.3064.1	25	
		4.0	92.232.4064.1	25	G2.232.4064.1	15	
		5.0	92.232.5064.1	20	G2.232.5064.1	10	
		6.0	92.232.6064.1	10	G2.232.6064.1	10	
		7.0	92.232.7064.1	10	G2.232.7064.1	10	
		8.0	92.232.8064.1	10	G2.232.8064.1	10	

Cable H05Z1Z1-F				Cable RZ1-K 0.6/1kV			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 L, PE, N	1.0	92.232.1064.2	75	G2.232.1064.2	50	
		2.0	92.232.2064.2	50	G2.232.2064.2	25	
		3.0	92.232.3064.2	25	G2.232.3064.2	25	
		4.0	92.232.4064.2	25	G2.232.4064.2	15	
		5.0	92.232.5064.2	20	G2.232.5064.2	10	
		6.0	92.232.6064.2	10	G2.232.6064.2	10	
		7.0	92.232.7064.2	10	G2.232.7064.2	10	
		8.0	92.232.8064.2	10	G2.232.8064.2	10	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
pebble gray	Code 2 L, PE, N	1.0	92.232.1064.3	75	
		2.0	92.232.2064.3	50	
		3.0	92.232.3064.3	25	
		4.0	92.232.4064.3	25	
		5.0	92.232.5064.3	20	
		6.0	92.232.6064.3	10	
		7.0	92.232.7064.3	10	
		8.0	92.232.8064.3	10	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
salmon red	Code 3 L, PE, N	1.0	92.232.1064.5	75	
		2.0	92.232.2064.5	50	
		3.0	92.232.3064.5	25	
		4.0	92.232.4064.5	25	
		5.0	92.232.5064.5	20	
		6.0	92.232.6064.5	10	
		7.0	92.232.7064.5	10	
		8.0	92.232.8064.5	10	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
brown	Code 3 1, 2/N, 3/L	1.0	92.232.1064.4	75	
		2.0	92.232.2064.4	50	
		3.0	92.232.3064.4	25	
		4.0	92.232.4064.4	25	
		5.0	92.232.5064.4	20	
		6.0	92.232.6064.4	10	
		7.0	92.232.7064.4	10	
		8.0	92.232.8064.4	10	



1 = BK
 2/N = GY
 3/L = BN

Sheath strip length: 100 mm
 Wire stripping length: 12 mm



Other cables, other lengths, other codings on request


GST18i3

Cable assemblies, 3 pole, 1.5 mm²

Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:
 Cable diameter: 9.8 mm

Cable material, H07RN-F 1.5: Rubber
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male

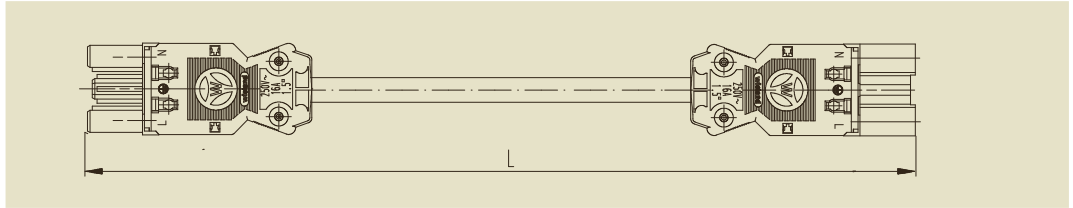


Cable H07RN-F 1.5					
Cable black/coding	Length m	Part No.	P. U.	Price	
black	Code 1 L, PE, N	1.0	G3.032.0102.1	50	
		2.0	G3.032.0202.1	25	
		3.0	G3.032.0302.1	20	
		4.0	G3.032.0402.1	15	
		5.0	G3.032.0502.1	10	
		6.0	G3.032.0602.1	10	
		7.0	G3.032.0702.1	8	
		8.0	G3.032.0802.1	8	



⊕ = GN/YE
 N = BU
 L = BN

Cable H07RN-F 1.5					
Cable black/coding	Length m	Part No.	P. U.	Price	
white	Code 1 L, PE, N	1.0	G3.032.0102.2	50	
		2.0	G3.032.0202.2	25	
		3.0	G3.032.0302.2	20	
		4.0	G3.032.0402.2	15	
		5.0	G3.032.0502.2	10	
		6.0	G3.032.0602.2	10	
		7.0	G3.032.0702.2	8	
		8.0	G3.032.0802.2	8	

Connection cables female – free end
 Wire ends ultrason. welded

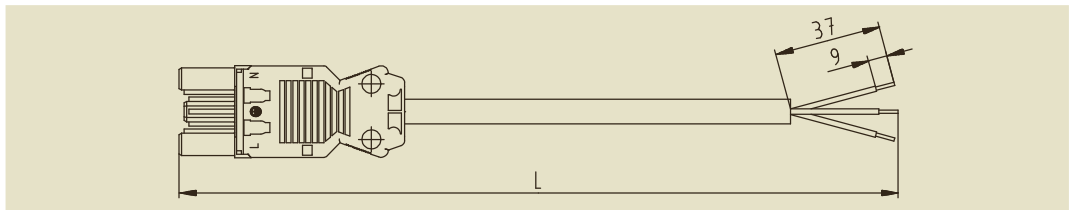

Cable H07RN-F 1.5					
Cable black/coding	Length m	Part No.	P. U.	Price	
black	Code 1 N, PE, L	1.0	G3.332.0102.1	50	
		2.0	G3.332.0202.1	25	
		3.0	G3.332.0302.1	20	
		4.0	G3.332.0402.1	15	
		5.0	G3.332.0502.1	10	
		6.0	G3.332.0602.1	10	
		7.0	G3.332.0702.1	8	
		8.0	G3.332.0802.1	8	



⊕ = GN/YE
 N = BU
 L = BN

Cable H07RN-F 1.5					
Cable black/coding	Length m	Part No.	P. U.	Price	
white	Code 1 N, PE, L	1.0	G3.332.0102.2	50	
		2.0	G3.332.0202.2	25	
		3.0	G3.332.0302.2	20	
		4.0	G3.332.0402.2	15	
		5.0	G3.332.0502.2	10	
		6.0	G3.332.0602.2	10	
		7.0	G3.332.0702.2	8	
		8.0	G3.332.0802.2	8	


Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 1.5 mm²

Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:
 Cable diameter: 9.8 mm

Cable material, H07RN-F 1.5: rubber
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables male – free end
 Wire ends ultrason. welded

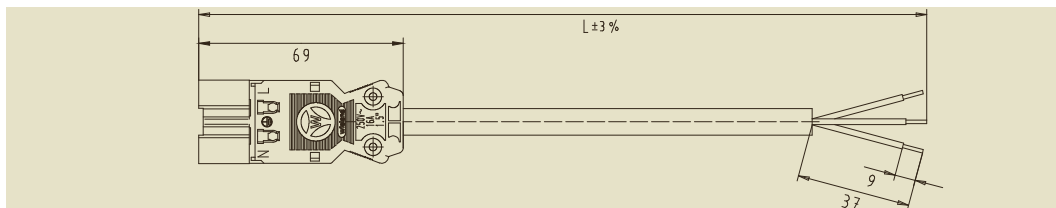

Cable H07RN-F 1.5

Cable black/coding	Length m	Part No.	P. U.	Price	
black	Code 1 L, PE, N	1.0	G3.432.0102.1	50	
		2.0	G3.432.0202.1	25	
		3.0	G3.432.0302.1	20	
		4.0	G3.432.0402.1	15	
		5.0	G3.432.0502.1	10	
		6.0	G3.432.0602.1	10	
		7.0	G3.432.0702.1	8	
		8.0	G3.432.0802.1	8	



Cable H07RN-F 1.5



Cable black/coding	Length m	Part No.	P. U.	Price	
white	Code 1 L, PE, N	1.0	G3.432.0102.2	50	
		2.0	G3.432.0202.2	25	
		3.0	G3.432.0302.2	20	
		4.0	G3.432.0402.2	15	
		5.0	G3.432.0502.2	10	
		6.0	G3.432.0602.2	10	
		7.0	G3.432.0702.2	8	
		8.0	G3.432.0802.2	8	

GST18i3



Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 2.5 mm²


Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 10.2 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05V2V2-F: PVC, contains halogen, continuous temperature 90 °C
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male



⊕ = GN/YE
 N = BU
 L = BN

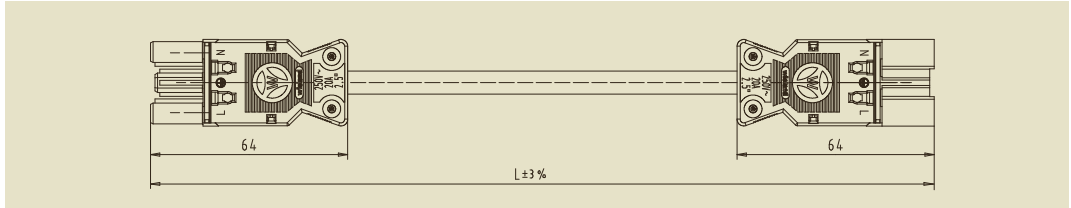

Cable black/coding		Length m	Cable H05VV-F			Cable H05V2V2-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 L, PE, N	1.0	92.238.1000.1	50		92.238.1010.1	50	
		2.0	92.238.2000.1	25		92.238.2010.1	25	
		3.0	92.238.3000.1	20		92.238.3010.1	20	
		4.0	92.238.4000.1	15		92.238.4010.1	15	
		5.0	92.238.5000.1	10		92.238.5010.1	10	
		6.0	92.238.6000.1	10		92.238.6010.1	10	
		7.0	92.238.7000.1	5		92.238.7010.1	5	
		8.0	92.238.8000.1	5		92.238.8010.1	5	

Cable white/coding		Length m	Cable H05VV-F			Cable H05V2V2-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 L, PE, N	1.0	92.238.1000.2	50		92.238.1010.2	50	
		2.0	92.238.2000.2	25		92.238.2010.2	25	
		3.0	92.238.3000.2	20		92.238.3010.2	20	
		4.0	92.238.4000.2	15		92.238.4010.2	15	
		5.0	92.238.5000.2	10		92.238.5010.2	10	
		6.0	92.238.6000.2	10		92.238.6010.2	10	
		7.0	92.238.7000.2	5		92.238.7010.2	5	
		8.0	92.238.8000.2	5		92.238.8010.2	5	

Cable black/coding		Length m	Cable H05VV-F			Cable H05V2V2-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
pebble gray	Code 2 L, PE, N	1.0	92.238.1000.3	50		92.238.1010.3	50	
		2.0	92.238.2000.3	25		92.238.2010.3	25	
		3.0	92.238.3000.3	20		92.238.3010.3	20	
		4.0	92.238.4000.3	15		92.238.4010.3	15	
		5.0	92.238.5000.3	10		92.238.5010.3	10	
		6.0	92.238.6000.3	10		92.238.6010.3	10	
		7.0	92.238.7000.3	5		92.238.7010.3	5	
		8.0	92.238.8000.3	5		92.238.8010.3	5	

Cable black/coding		Length m	Cable H05VV-F			Cable H05V2V2-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
salmon red	Code 3 L, PE, N	1.0	92.238.1000.5	50		92.238.1010.5	50	
		2.0	92.238.2000.5	25		92.238.2010.5	25	
		3.0	92.238.3000.5	20		92.238.3010.5	20	
		4.0	92.238.4000.5	15		92.238.4010.5	15	
		5.0	92.238.5000.5	10		92.238.5010.5	10	
		6.0	92.238.6000.5	10		92.238.6010.5	10	
		7.0	92.238.7000.5	5		92.238.7010.5	5	
		8.0	92.238.8000.5	5		92.238.8010.5	5	


Cable black/coding		Length m	Cable H05VV-F		
			Part No.	P. U.	Price
brown	Code 4 1, 2/N, 3/L	1.0	92.238.1000.4	50	
		2.0	92.238.2000.4	25	
		3.0	92.238.3000.4	20	
		4.0	92.238.4000.4	15	
		5.0	92.238.5000.4	10	
		6.0	92.238.6000.4	10	
		7.0	92.238.7000.4	5	
		8.0	92.238.8000.4	5	



1 = BK
 2/N = GY
 3/L = BN

Other cables, other lengths, other codings on request


Cable assemblies, 3 pole, 2.5 mm²

Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 10.2 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05V2V2-F: PVC, contains halogen, continuous temperature 90 °C
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables female – free end

Wire ends ultrason. welded

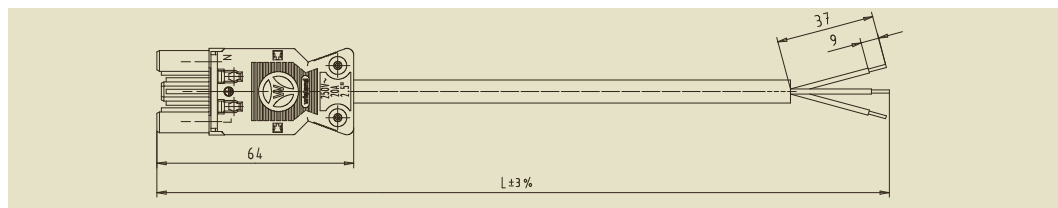

⊕ = GN/YE
 N = BU
 L = BN

Cable black/coding		Cable H05VV-F				Cable H05V2V2-F			
Length m	Part No.	P. U.	Price	Part No.	P. U.	Price			
black	Code 1 N, PE, L	1.0	92.238.1003.1	50		92.238.1013.1	50		
		2.0	92.238.2003.1	25		92.238.2013.1	25		
		3.0	92.238.3003.1	20		92.238.3013.1	20		
		4.0	92.238.4003.1	15		92.238.4013.1	15		
		5.0	92.238.5003.1	10		92.238.5013.1	10		
		6.0	92.238.6003.1	10		92.238.6013.1	10		
		7.0	92.238.7003.1	5		92.238.7013.1	5		
		8.0	92.238.8003.1	5		92.238.8013.1	5		

Cable white/coding		Cable H05VV-F				Cable H05V2V2-F			
Length m	Part No.	P. U.	Price	Part No.	P. U.	Price			
white	Code 1 N, PE, L	1.0	92.238.1003.2	50		92.238.1013.2	50		
		2.0	92.238.2003.2	25		92.238.2013.2	25		
		3.0	92.238.3003.2	20		92.238.3013.2	20		
		4.0	92.238.4003.2	15		92.238.4013.2	15		
		5.0	92.238.5003.2	10		92.238.5013.2	10		
		6.0	92.238.6003.2	10		92.238.6013.2	10		
		7.0	92.238.7003.2	5		92.238.7013.2	5		
		8.0	92.238.8003.2	5		92.238.8013.2	5		

Cable black/coding		Cable H05VV-F				Cable H05V2V2-F			
Length m	Part No.	P. U.	Price	Part No.	P. U.	Price			
pebble gray	Code 2 N, PE, L	1.0	92.238.1003.3	50		92.238.1013.3	50		
		2.0	92.238.2003.3	25		92.238.2013.3	25		
		3.0	92.238.3003.3	20		92.238.3013.3	20		
		4.0	92.238.4003.3	15		92.238.4013.3	15		
		5.0	92.238.5003.3	10		92.238.5013.3	10		
		6.0	92.238.6003.3	10		92.238.6013.3	10		
		7.0	92.238.7003.3	5		92.238.7013.3	5		
		8.0	92.238.8003.3	5		92.238.8013.3	5		

Cable black/coding		Cable H05VV-F				Cable H05V2V2-F			
Length m	Part No.	P. U.	Price	Part No.	P. U.	Price			
salmon red	Code 3 N, PE, L	1.0	92.238.1003.5	50		92.238.1013.5	50		
		2.0	92.238.2003.5	25		92.238.2013.5	25		
		3.0	92.238.3003.5	20		92.238.3013.5	20		
		4.0	92.238.4003.5	15		92.238.4013.5	15		
		5.0	92.238.5003.5	10		92.238.5013.5	10		
		6.0	92.238.6003.5	10		92.238.6013.5	10		
		7.0	92.238.7003.5	5		92.238.7013.5	5		
		8.0	92.238.8003.5	5		92.238.8013.5	5		

Cable black/coding		Cable H05VV-F			
Length m	Part No.	P. U.	Price		
brown	Code 4 3/L, 2/N, 1	1.0	92.238.1003.4	50	
		2.0	92.238.2003.4	25	
		3.0	92.238.3003.4	20	
		4.0	92.238.4003.4	15	
		5.0	92.238.5003.4	10	
		6.0	92.238.6003.4	10	
		7.0	92.238.7003.4	5	
		8.0	92.238.8003.4	5	



1 = BK
 2/N = GY
 3/L = BN

Sheath strip length: 100 mm
 Wire stripping length: 12 mm





GST18i3



Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 2.5 mm²

Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 10.2 mm


Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05V2V2-F: PVC, contains halogen, continuous temperature 90 °C
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables male – free end

Wire ends ultrason. welded



⊕ = GN/YE
 N = BU
 L = BN

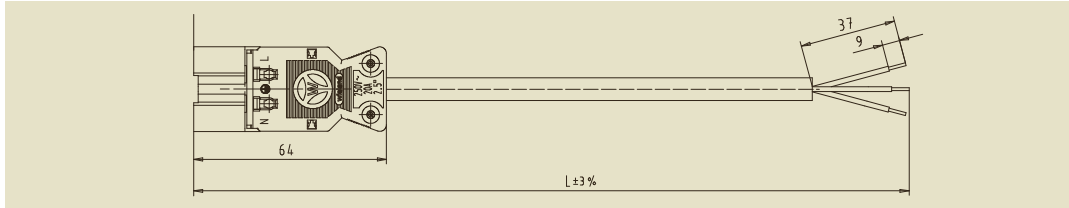

Cable black/coding		Length m	Part No.	P. U.	Price	Cable H05V2V2-F		
						Part No.	P. U.	Price
black	Code 1 L, PE, N	1.0	92.238.1004.1	50		92.238.1014.1	50	
		2.0	92.238.2004.1	25		92.238.2014.1	25	
		3.0	92.238.3004.1	20		92.238.3014.1	20	
		4.0	92.238.4004.1	15		92.238.4014.1	15	
		5.0	92.238.5004.1	10		92.238.5014.1	10	
		6.0	92.238.6004.1	10		92.238.6014.1	10	
		7.0	92.238.7004.1	5		92.238.7014.1	5	
		8.0	92.238.8004.1	5		92.238.8014.1	5	

Cable white/coding		Length m	Part No.	P. U.	Price	Cable H05V2V2-F		
						Part No.	P. U.	Price
white	Code 1 L, PE, N	1.0	92.238.1004.2	50		92.238.1014.2	50	
		2.0	92.238.2004.2	25		92.238.2014.2	25	
		3.0	92.238.3004.2	20		92.238.3014.2	20	
		4.0	92.238.4004.2	15		92.238.4014.2	15	
		5.0	92.238.5004.2	10		92.238.5014.2	10	
		6.0	92.238.6004.2	10		92.238.6014.2	10	
		7.0	92.238.7004.2	5		92.238.7014.2	5	
		8.0	92.238.8004.2	5		92.238.8014.2	5	

Cable black/coding		Length m	Part No.	P. U.	Price	Cable H05V2V2-F		
						Part No.	P. U.	Price
pebble gray	Code 2 L, PE, N	1.0	92.238.1004.3	50		92.238.1014.3	50	
		2.0	92.238.2004.3	25		92.238.2014.3	25	
		3.0	92.238.3004.3	20		92.238.3014.3	20	
		4.0	92.238.4004.3	15		92.238.4014.3	15	
		5.0	92.238.5004.3	10		92.238.5014.3	10	
		6.0	92.238.6004.3	10		92.238.6014.3	10	
		7.0	92.238.7004.3	5		92.238.7014.3	5	
		8.0	92.238.8004.3	5		92.238.8014.3	5	

Cable black/coding		Length m	Part No.	P. U.	Price	Cable H05V2V2-F		
						Part No.	P. U.	Price
salmon red	Code 3 L, PE, N	1.0	92.238.1004.5	50		92.238.1014.5	50	
		2.0	92.238.2004.5	25		92.238.2014.5	25	
		3.0	92.238.3004.5	20		92.238.3014.5	20	
		4.0	92.238.4004.5	15		92.238.4014.5	15	
		5.0	92.238.5004.5	10		92.238.5014.5	10	
		6.0	92.238.6004.5	10		92.238.6014.5	10	
		7.0	92.238.7004.5	5		92.238.7014.5	5	
		8.0	92.238.8004.5	5		92.238.8014.5	5	

Cable black/coding		Length m	Part No.	P. U.	Price
brown	Code 4 1, 2/N, 3/L	1.0	92.238.1004.4	50	
		2.0	92.238.2004.4	25	
		3.0	92.238.3004.4	20	
		4.0	92.238.4004.4	15	
		5.0	92.238.5004.4	10	
		6.0	92.238.6004.4	10	
		7.0	92.238.7004.4	5	
		8.0	92.238.8004.4	5	




1 = BK
 2/N = GY
 3/L = BN

Sheath strip length: 100 mm
 Wire stripping length: 12 mm


Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 2.5 mm²

Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 10.2 mm

Cable material, H05Z1Z1-F: halogen-free
 Cable material, RZ1-K VV-K: halogen-free
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male

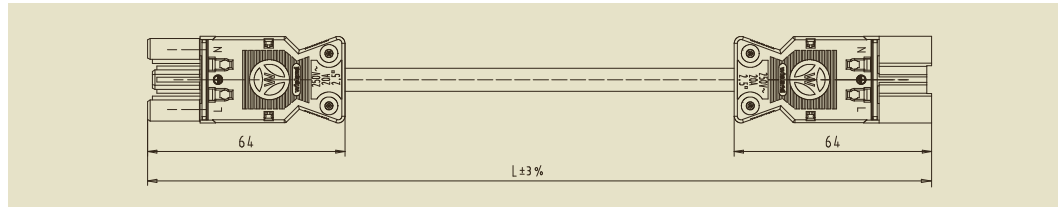

⊕ = GN/YE
 N = BU
 L = BN

Cable H05Z1Z1-F					Cable RZ1-K VV-K		
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 L, PE, N	1.0	92.238.1060.1	50	G2.238.1060.1	40	
		2.0	92.238.2060.1	25	G2.238.2060.1	15	
		3.0	92.238.3060.1	15	G2.238.3060.1	15	
		4.0	92.238.4060.1	10	G2.238.4060.1	10	
		5.0	92.238.5060.1	10	G2.238.5060.1	10	
		6.0	92.238.6060.1	10	G2.238.6060.1	8	
		7.0	92.238.7060.1	5	G2.238.7060.1	5	
		8.0	92.238.8060.1	5	G2.238.8060.1	5	

Cable H05Z1Z1-F					Cable RZ1-K VV-K		
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 L, PE, N	1.0	92.238.1060.2	50	G2.238.1060.2	40	
		2.0	92.238.2060.2	25	G2.238.2060.2	15	
		3.0	92.238.3060.2	15	G2.238.3060.2	15	
		4.0	92.238.4060.2	10	G2.238.4060.2	10	
		5.0	92.238.5060.2	10	G2.238.5060.2	10	
		6.0	92.238.6060.2	10	G2.238.6060.2	8	
		7.0	92.238.7060.2	5	G2.238.7060.2	5	
		8.0	92.238.8060.2	5	G2.238.8060.2	5	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
pebble gray	Code 2 L, PE, N	1.0	92.238.1060.3	50	
		2.0	92.238.2060.3	25	
		3.0	92.238.3060.3	15	
		4.0	92.238.4060.3	10	
		5.0	92.238.5060.3	10	
		6.0	92.238.6060.3	10	
		7.0	92.238.7060.3	5	
		8.0	92.238.8060.3	5	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
salmon red	Code 3 L, PE, N	1.0	92.238.1060.5	50	
		2.0	92.238.2060.5	25	
		3.0	92.238.3060.5	15	
		4.0	92.238.4060.5	10	
		5.0	92.238.5060.5	10	
		6.0	92.238.6060.5	10	
		7.0	92.238.7060.5	5	
		8.0	92.238.8060.5	5	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
brown	Code 4 1, 2/N, 3/L	1.0	92.238.1060.4	50	
		2.0	92.238.2060.4	25	
		3.0	92.238.3060.4	15	
		4.0	92.238.4060.4	10	
		5.0	92.238.5060.4	10	
		6.0	92.238.6060.4	10	
		7.0	92.238.7060.4	5	
		8.0	92.238.8060.4	5	




1 = BK
 2/N = GY
 3/L = BN



Other cables, other lengths, other codings on request

GST18i3

Cable assemblies, 3 pole, 2.5 mm²

Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 10.2 mm


Cable material, H05Z1Z1-F: halogen-free
 Cable material, RZ1-K VV-K: halogen-free
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables female – free end

Wire ends ultrason. welded



⊕ = GN/YE
 N = BU
 L = BN

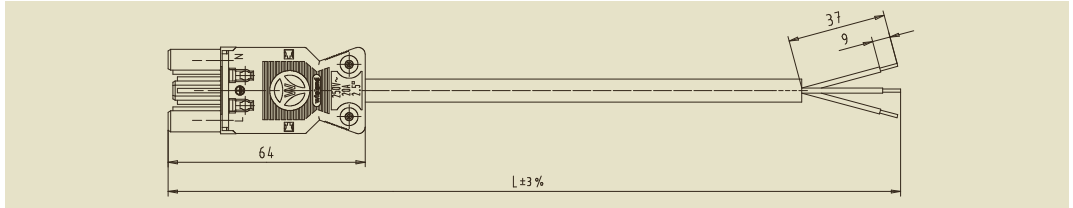

GST18i3

Cable H05Z1Z1-F				Cable RZ1-K VV-K			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 N, PE, L	1.0	92.238.1063.1	50	G2.238.1063.1	50	
		2.0	92.238.2063.1	25	G2.238.2063.1	25	
		3.0	92.238.3063.1	15	G2.238.3063.1	20	
		4.0	92.238.4063.1	15	G2.238.4063.1	15	
		5.0	92.238.5063.1	10	G2.238.5063.1	10	
		6.0	92.238.6063.1	10	G2.238.6063.1	10	
		7.0	92.238.7063.1	5	G2.238.7063.1	5	
		8.0	92.238.8063.1	5	G2.238.8063.1	5	

Cable H05Z1Z1-F				Cable RZ1-K VV-K			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 N, PE, L	1.0	92.238.1063.2	50	G2.238.1063.2	50	
		2.0	92.238.2063.2	25	G2.238.2063.2	25	
		3.0	92.238.3063.2	15	G2.238.3063.2	20	
		4.0	92.238.4063.2	15	G2.238.4063.2	15	
		5.0	92.238.5063.2	10	G2.238.5063.2	10	
		6.0	92.238.6063.2	10	G2.238.6063.2	10	
		7.0	92.238.7063.2	5	G2.238.7063.2	5	
		8.0	92.238.8063.2	5	G2.238.8063.2	5	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
pebble gray	Code 2 N, PE, L	1.0	92.238.1063.3	50	
		2.0	92.238.2063.3	25	
		3.0	92.238.3063.3	15	
		4.0	92.238.4063.3	15	
		5.0	92.238.5063.3	10	
		6.0	92.238.6063.3	10	
		7.0	92.238.7063.3	5	
		8.0	92.238.8063.3	5	

Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
salmon red	Code 3 N, PE, L	1.0	92.238.1063.5	50	
		2.0	92.238.2063.5	25	
		3.0	92.238.3063.5	15	
		4.0	92.238.4063.5	15	
		5.0	92.238.5063.5	10	
		6.0	92.238.6063.5	10	
		7.0	92.238.7063.5	5	
		8.0	92.238.8063.5	5	




Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	
brown	Code 4 3/L, 2/N, 1	1.0	92.238.1063.4	50	
		2.0	92.238.2063.4	25	
		3.0	92.238.3063.4	15	
		4.0	92.238.4063.4	15	
		5.0	92.238.5063.4	10	
		6.0	92.238.6063.4	10	
		7.0	92.238.7063.4	5	
		8.0	92.238.8063.4	5	



Sheath strip length: 100 mm
 Wire stripping length: 12 mm

Other cables, other lengths, other codings on request


Cable assemblies, 3 pole, 2.5 mm²

Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:   
 Cable diameter: 10.2 mm

Cable material, H05Z1Z1-F: halogen-free
 Cable material, RZ1-K VV-K: halogen-free
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables male – free end

Wire ends ultrason. welded

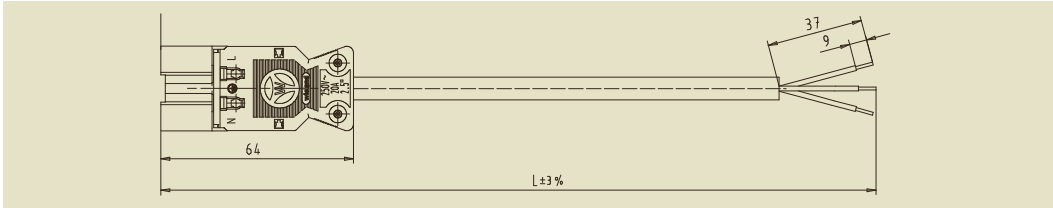

⊕ = GN/YE
 N = BU
 L = BN

Cable H05Z1Z1-F					Cable RZ1-K VV-K		
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 L, PE, N	1.0	92.238.1064.1	50	G2.238.1064.1	50	
		2.0	92.238.2064.1	25	G2.238.2064.1	25	
		3.0	92.238.3064.1	15	G2.238.3064.1	20	
		4.0	92.238.4064.1	15	G2.238.4064.1	10	
		5.0	92.238.5064.1	10	G2.238.5064.1	10	
		6.0	92.238.6064.1	10	G2.238.6064.1	8	
		7.0	92.238.7064.1	5	G2.238.7064.1	5	
		8.0	92.238.8064.1	5	G2.238.8064.1	5	

Cable H05Z1Z1-F					Cable RZ1-K VV-K		
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 L, PE, N	1.0	92.238.1064.2	50	G2.238.1064.2	50	
		2.0	92.238.2064.2	25	G2.238.2064.2	50	
		3.0	92.238.3064.2	15	G2.238.3064.2	25	
		4.0	92.238.4064.2	15	G2.238.4064.2	10	
		5.0	92.238.5064.2	10	G2.238.5064.2	20	
		6.0	92.238.6064.2	10	G2.238.6064.2	8	
		7.0	92.238.7064.2	5	G2.238.7064.2	5	
		8.0	92.238.8064.2	5	G2.238.8064.2	5	

Cable H05Z1Z1-F				
Cable black/coding	Length m	Part No.	P. U.	Price
pebble gray	Code 2 L, PE, N	1.0	92.238.1064.3	50
		2.0	92.238.2064.3	25
		3.0	92.238.3064.3	15
		4.0	92.238.4064.3	15
		5.0	92.238.5064.3	10
		6.0	92.238.6064.3	10
		7.0	92.238.7064.3	5
		8.0	92.238.8064.3	5

Cable H05Z1Z1-F				
Cable black/coding	Length m	Part No.	P. U.	Price
salmon red	Code 3 L, PE, N	1.0	92.238.1064.5	50
		2.0	92.238.2064.5	25
		3.0	92.238.3064.5	15
		4.0	92.238.4064.5	15
		5.0	92.238.5064.5	10
		6.0	92.238.6064.5	10
		7.0	92.238.7064.5	5
		8.0	92.238.8064.5	5

Cable H05Z1Z1-F				
Cable black/coding	Length m	Part No.	P. U.	Price
brown	Code 4 1, 2/N, 3/L	1.0	92.238.1064.4	50
		2.0	92.238.2064.4	25
		3.0	92.238.3064.4	15
		4.0	92.238.4064.4	15
		5.0	92.238.5064.4	10
		6.0	92.238.6064.4	10
		7.0	92.238.7064.4	5
		8.0	92.238.8064.4	5



Sheath strip length: 100 mm
 Wire stripping length: 12 mm



GST18i3




Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 2.5 mm²

Rated voltage:	250 V	Cable material, H07RN-F:	rubber
Rated current:	20 A	Sheath strip length:	37 mm
Rated impulse voltage:	4 kV	Wire stripping length:	9 mm
Protection rating:	IP20, IP40 when plugged	The use of a locking device is mandatory.	
Approvals:		Locking device for flying leads: see Accessories	
Cable diameter:	11.6 mm		

Connecting cables female – male

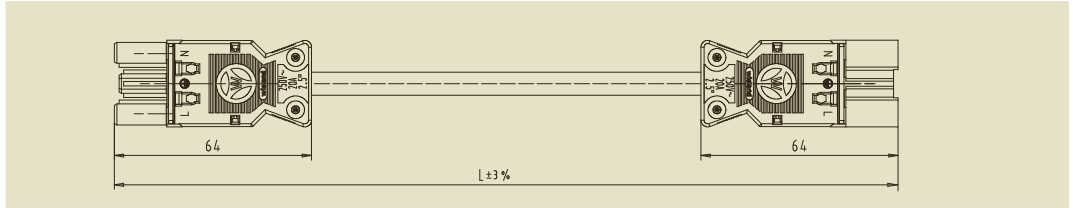


Cable H07RN-F 2.5					
Cable black/coding	Length m	Part No.	P. U.	Price	
black	Code 1 L, PE, N	1.0	G3.032.0103.1	40	
		2.0	G3.032.0203.1	20	
		3.0	G3.032.0303.1	15	
		4.0	G3.032.0403.1	10	
		5.0	G3.032.0503.1	10	
		6.0	G3.032.0603.1	8	
		7.0	G3.032.0703.1	5	
		8.0	G3.032.0803.1	5	



⊕ = GN/YE
N = BU
L = BN

Cable H07RN-F 2.5					
Cable black/coding	Length m	Part No.	P. U.	Price	
white	Code 1 L, PE, N	1.0	G3.032.0103.2	40	
		2.0	G3.032.0203.2	20	
		3.0	G3.032.0303.2	15	
		4.0	G3.032.0403.2	10	
		5.0	G3.032.0503.2	10	
		6.0	G3.032.0603.2	8	
		7.0	G3.032.0703.2	5	
		8.0	G3.032.0803.2	5	

Connection cables female – free end
Wire ends ultrason. welded

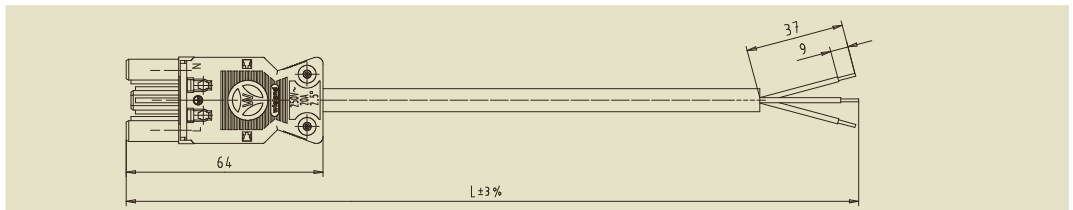

Cable H07RN-F 2.5					
Cable black/coding	Length m	Part No.	P. U.	Price	
black	Code 1 N, PE, L	1.0	G3.332.0103.1	40	
		2.0	G3.332.0203.1	25	
		3.0	G3.332.0303.1	20	
		4.0	G3.332.0403.1	10	
		5.0	G3.332.0503.1	10	
		6.0	G3.332.0603.1	8	
		7.0	G3.332.0703.1	5	
		8.0	G3.332.0803.1	5	



⊕ = GN/YE
N = BU
L = BN

Cable H07RN-F 2.5					
Cable black/coding	Length m	Part No.	P. U.	Price	
white	Code 1 N, PE, L	1.0	G3.332.0103.2	40	
		2.0	G3.332.0203.2	25	
		3.0	G3.332.0303.2	20	
		4.0	G3.332.0403.2	10	
		5.0	G3.332.0503.2	10	
		6.0	G3.332.0603.2	8	
		7.0	G3.332.0703.2	5	
		8.0	G3.332.0803.2	5	


Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 2.5 mm²

Rated voltage: 250 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:
 Cable diameter: 11.6 mm

Cable material, H07RN-F: rubber
 Sheath strip length: 37 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables male – free end
 Wire ends ultrason. welded

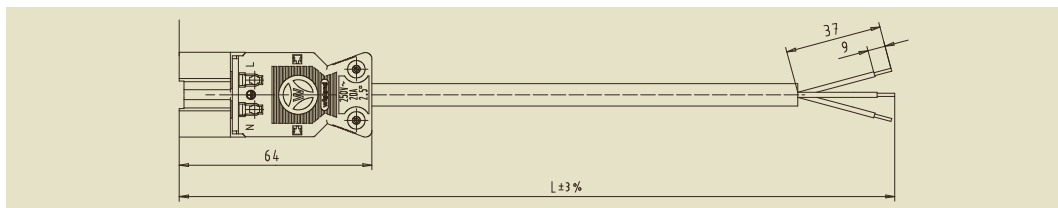

Cable H07RN-F 2.5

Cable black/coding	Length m	Part No.	P. U.	Price	
black	Code 1 L, PE, N	1.0	G3.432.0103.1	40	
		2.0	G3.432.0203.1	20	
		3.0	G3.432.0303.1	15	
		4.0	G3.432.0403.1	10	
		5.0	G3.432.0503.1	10	
		6.0	G3.432.0603.1	8	
		7.0	G3.432.0703.1	5	
		8.0	G3.432.0803.1	5	



⊕ = GN/YE
 N = BU
 L = BN

Cable H07RN-F 2.5



Cable black/coding	Length m	Part No.	P. U.	Price	
white	Code 1 L, PE, N	1.0	G3.432.0103.2	40	
		2.0	G3.432.0203.2	20	
		3.0	G3.432.0303.2	15	
		4.0	G3.432.0403.2	10	
		5.0	G3.432.0503.2	10	
		6.0	G3.432.0603.2	8	
		7.0	G3.432.0703.2	5	
		8.0	G3.432.0803.2	5	

GST18i3



Other cables, other lengths, other codings on request

Cable assemblies, 3 pole, 1.5 mm²


Rated voltage: 250 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 8.3 mm

Cable material, H05VV-F: PVC, contains halogen
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male CEE 7/4



⊕ = GN/YE
 N = BU
 L = BN

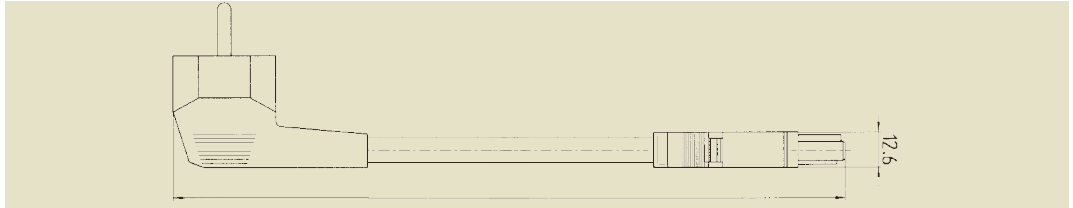

Cable H05VV-F

Cable black/coding	Length m	Part No.	P. U.	Price	
black	Code 1 N, PE, L	1.0	92.232.1007.1	50	
		2.0	92.232.2007.1	40	
		3.0	92.232.3007.1	25	
		4.0	92.232.4007.1	20	
		5.0	92.232.5007.1	20	
		6.0	92.232.6007.1	10	
		7.0	92.232.7007.1	10	
		8.0	92.232.8007.1	10	

Cable H05VV-F

Cable white/coding	Length m	Part No.	P. U.	Price	
white	Code 1 N, PE, L	1.0	92.232.1007.2	50	
		2.0	92.232.2007.2	40	
		3.0	92.232.3007.2	25	
		4.0	92.232.4007.2	20	
		5.0	92.232.5007.2	20	
		6.0	92.232.6007.2	10	
		7.0	92.232.7007.2	10	
		8.0	92.232.8007.2	10	

Cable H05VV-F

Cable black/coding	Length m	Part No.	P. U.	Price	
salmon red	Code 3 N, PE, L	2.0	92.232.2007.5	40	
		3.0	92.232.3007.5	25	

GST18i3

Other cables, other lengths, other codings on request




Cable assemblies, 3 pole, 1.0 mm²

Rated voltage: 250 V
Rated current: 10 A
Rated impulse voltage: 4 kV
Protection rating: IP20, IP40 when plugged
Approvals:
Cable diameter: 7.5 mm

Cable material, H05VV-F: PVC, contains halogen
The use of a locking device is mandatory.
Locking device for flying leads: see Accessories

Connecting cables male – low-heat device, female

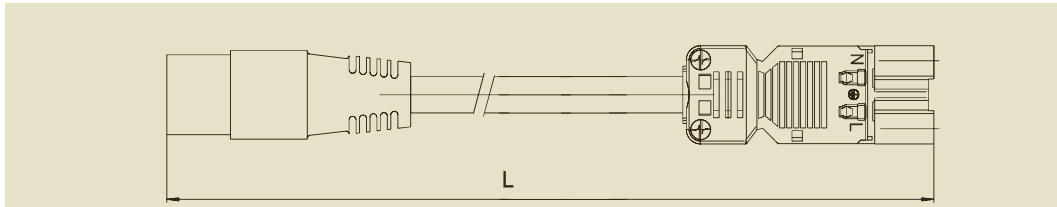

⊕ = GN/YE
 N = BU
 L = BN

Cable H05VV-F

Cable white/coding	Code 1	Length m	Part No.	P. U.	Price
white		2.0	99.400.5623.1	50	




GST18i3



Other cables, other lengths, other codings on request

Cable assemblies, 4 pole, 1.5 mm²


Rated voltage: 250 V / 400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 9.2 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male



⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK

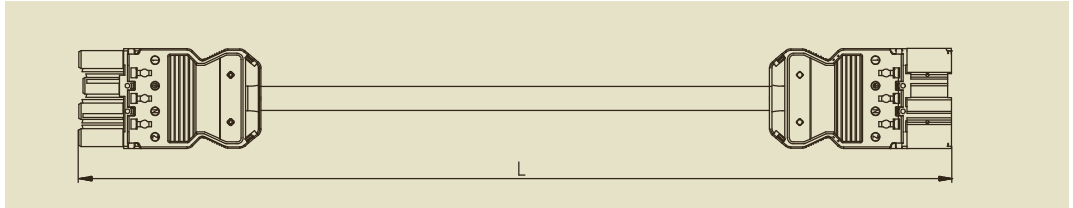

Cable black/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 1, PE, N, 2	1.0	92.207.1000.1	50		92.207.1060.1	50	
		2.0	92.207.2000.1	25		92.207.2060.1	25	
		3.0	92.207.3000.1	20		92.207.3060.1	20	
		4.0	92.207.4000.1	15		92.207.4060.1	15	
		5.0	92.207.5000.1	10		92.207.5060.1	10	
		6.0	92.207.6000.1	10		92.207.6060.1	10	
		7.0	92.207.7000.1	5		92.207.7060.1	5	
		8.0	92.207.8000.1	5		92.207.8060.1	5	


Cable white/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 1, PE, N, 2	1.0	92.207.1000.2	50		92.207.1060.2	50	
		2.0	92.207.2000.2	25		92.207.2060.2	25	
		3.0	92.207.3000.2	20		92.207.3060.2	20	
		4.0	92.207.4000.2	15		92.207.4060.2	15	
		5.0	92.207.5000.2	10		92.207.5060.2	10	
		6.0	92.207.6000.2	10		92.207.6060.2	10	
		7.0	92.207.7000.2	5		92.207.7060.2	5	
		8.0	92.207.8000.2	5		92.207.8060.2	5	

Cable black/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
pebble gray	Code 2 1, PE, N, 2	1.0	92.207.1000.3	50		92.207.1060.3	50	
		2.0	92.207.2000.3	25		92.207.2060.3	25	
		3.0	92.207.3000.3	20		92.207.3060.3	20	
		4.0	92.207.4000.3	15		92.207.4060.3	15	
		5.0	92.207.5000.3	10		92.207.5060.3	10	
		6.0	92.207.6000.3	10		92.207.6060.3	10	
		7.0	92.207.7000.3	5		92.207.7060.3	10	
		8.0	92.207.8000.3	5		92.207.8060.3	5	

Other cables, other lengths, other codings on request




Cable assemblies, 4 pole, 1.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 9.2 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables female – free end

Wire ends ultrason. welded

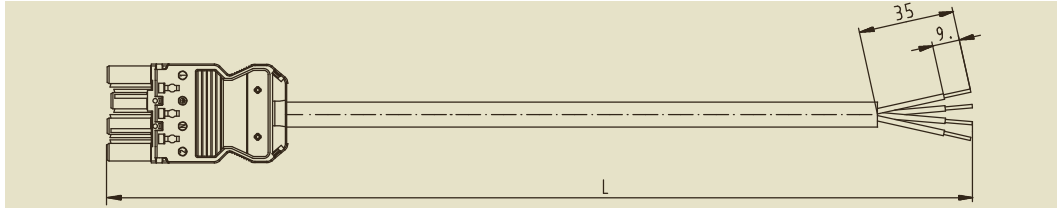

⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK

Cable black/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
black	Code 1 2, N, PE, 1	1.0	92.207.1003.1	50		92.207.1063.1	50		
		2.0	92.207.2003.1	25		92.207.2063.1	25		
		3.0	92.207.3003.1	20		92.207.3063.1	20		
		4.0	92.207.4003.1	15		92.207.4063.1	15		
		5.0	92.207.5003.1	10		92.207.5063.1	10		
		6.0	92.207.6003.1	10		92.207.6063.1	10		
		7.0	92.207.7003.1	5		92.207.7063.1	5		
		8.0	92.207.8003.1	5		92.207.8063.1	5		

Cable white/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
white	Code 1 2, N, PE, 1	1.0	92.207.1003.2	50		92.207.1063.2	50		
		2.0	92.207.2003.2	25		92.207.2063.2	25		
		3.0	92.207.3003.2	20		92.207.3063.2	20		
		4.0	92.207.4003.2	15		92.207.4063.2	15		
		5.0	92.207.5003.2	10		92.207.5063.2	10		
		6.0	92.207.6003.2	10		92.207.6063.2	10		
		7.0	92.207.7003.2	5		92.207.7063.2	10		
		8.0	92.207.8003.2	5		92.207.8063.2	5		

Cable black/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
pebble gray	Code 2 2, N, PE, 1	1.0	92.207.1003.3	50		92.207.1063.3	50		
		2.0	92.207.2003.3	25		92.207.2063.3	25		
		3.0	92.207.3003.3	20		92.207.3063.3	20		
		4.0	92.207.4003.3	15		92.207.4063.3	15		
		5.0	92.207.5003.3	10		92.207.5063.3	10		
		6.0	92.207.6003.3	10		92.207.6063.3	10		
		7.0	92.207.7003.3	10		92.207.7063.3	10		
		8.0	92.207.8003.3	5		92.207.8063.3	5		




GST18i4



Other cables, other lengths, other codings on request

Cable assemblies, 4 pole, 1.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 9.2 mm


Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables male – free end

Wire ends ultrason. welded



⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK

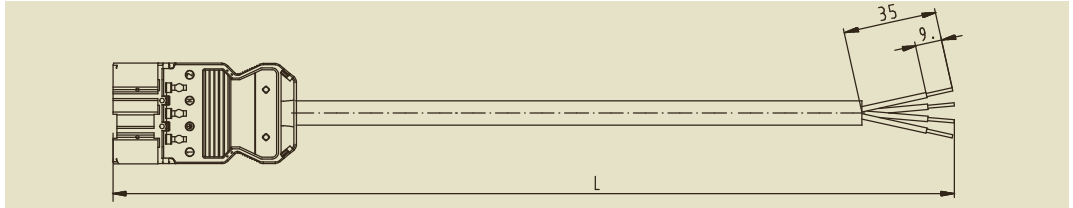

Cable black/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 1, PE, N, 2	1.0	92.207.1004.1	50		92.207.1064.1	50	
		2.0	92.207.2004.1	25		92.207.2064.1	25	
		3.0	92.207.3004.1	20		92.207.3064.1	20	
		4.0	92.207.4004.1	15		92.207.4064.1	15	
		5.0	92.207.5004.1	10		92.207.5064.1	10	
		6.0	92.207.6004.1	10		92.207.6064.1	10	
		7.0	92.207.7004.1	5		92.207.7064.1	5	
		8.0	92.207.8004.1	5		92.207.8064.1	5	

Cable white/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 1, PE, N, 2	1.0	92.207.1004.2	50		92.207.1064.2	50	
		2.0	92.207.2004.2	25		92.207.2064.2	25	
		3.0	92.207.3004.2	20		92.207.3064.2	20	
		4.0	92.207.4004.2	15		92.207.4064.2	15	
		5.0	92.207.5004.2	10		92.207.5064.2	10	
		6.0	92.207.6004.2	10		92.207.6064.2	10	
		7.0	92.207.7004.2	5		92.207.7064.2	10	
		8.0	92.207.8004.2	5		92.207.8064.2	5	


Cable black/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
pebble gray	Code 2 1, PE, N, 2	1.0	92.207.1004.3	50		92.207.1064.3	50	
		2.0	92.207.2004.3	25		92.207.2064.3	25	
		3.0	92.207.3004.3	20		92.207.3064.3	20	
		4.0	92.207.4004.3	15		92.207.4064.3	15	
		5.0	92.207.5004.3	10		92.207.5064.3	10	
		6.0	92.207.6004.3	10		92.207.6064.3	10	
		7.0	92.207.7004.3	5		92.207.7064.3	10	
		8.0	92.207.8004.3	5		92.207.8064.3	5	

GST18i4




Other cables, other lengths, other codings on request

Cable assemblies, 4 pole, 2.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 10.8 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male

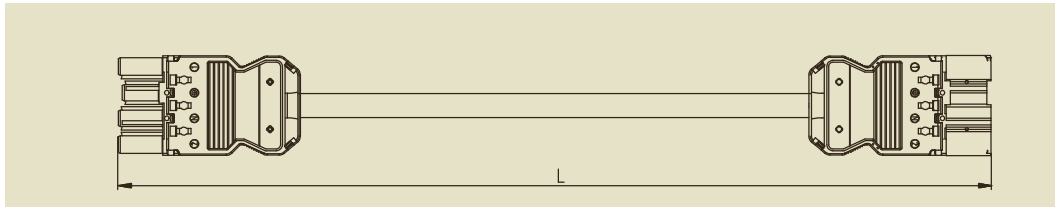

⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK

Cable H05VV-F		Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 1, PE, N, 2	1.0	92.208.1000.1	40	92.208.1060.1	40	
		2.0	92.208.2000.1	20	92.208.2060.1	20	
		3.0	92.208.3000.1	15	92.208.3060.1	15	
		4.0	92.208.4000.1	10	92.208.4060.1	10	
		5.0	92.208.5000.1	10	92.208.5060.1	10	
		6.0	92.208.6000.1	8	92.208.6060.1	8	
		7.0	92.208.7000.1	5	92.208.7060.1	5	
		8.0	92.208.8000.1	5	92.208.8060.1	5	

Cable H05VV-F		Cable H05Z1Z1-F					
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 1, PE, N, 2	1.0	92.208.1000.2	40	92.208.1060.2	50	
		2.0	92.208.2000.2	20	92.208.2060.2	20	
		3.0	92.208.3000.2	15	92.208.3060.2	15	
		4.0	92.208.4000.2	10	92.208.4060.2	15	
		5.0	92.208.5000.2	10	92.208.5060.2	15	
		6.0	92.208.6000.2	8	92.208.6060.2	10	
		7.0	92.208.7000.2	5	92.208.7060.2	5	
		8.0	92.208.8000.2	5	92.208.8060.2	5	

Cable H05VV-F		Cable H05Z1Z1-F					
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
pebble gray	Code 2 1, PE, N, 2	1.0	92.208.1000.3	40	92.208.1060.3	40	
		2.0	92.208.2000.3	20	92.208.2060.3	20	
		3.0	92.208.3000.3	15	92.208.3060.3	15	
		4.0	92.208.4000.3	10	92.208.4060.3	10	
		5.0	92.208.5000.3	10	92.208.5060.3	10	
		6.0	92.208.6000.3	8	92.208.6060.3	8	
		7.0	92.208.7000.3	5	92.208.7060.3	5	
		8.0	92.208.8000.3	5	92.208.8060.3	5	




GST18i4



Other cables, other lengths, other codings on request

Cable assemblies, 4 pole, 2.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 10.8 mm


Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables female – free end

Wire ends ultrason. welded



⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK

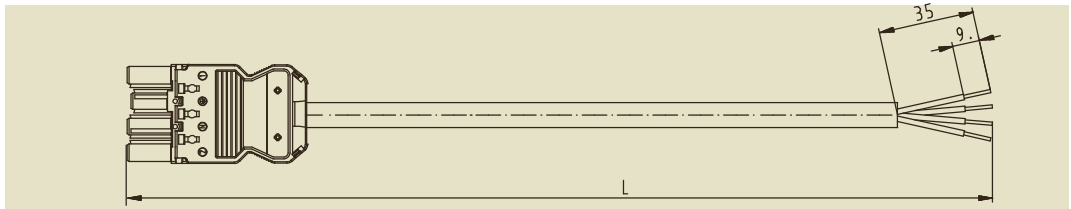

Cable black/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 2, N, PE, 1	1.0	92.208.1003.1	50		92.208.1063.1	50	
		2.0	92.208.2003.1	25		92.208.2063.1	25	
		3.0	92.208.3003.1	20		92.208.3063.1	20	
		4.0	92.208.4003.1	15		92.208.4063.1	15	
		5.0	92.208.5003.1	10		92.208.5063.1	10	
		6.0	92.208.6003.1	10		92.208.6063.1	10	
		7.0	92.208.7003.1	5		92.208.7063.1	5	
		8.0	92.208.8003.1	5		92.208.8063.1	5	


Cable white/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 2, N, PE, 1	1.0	92.208.1003.2	50		92.208.1063.2	50	
		2.0	92.208.2003.2	25		92.208.2063.2	25	
		3.0	92.208.3003.2	20		92.208.3063.2	20	
		4.0	92.208.4003.2	15		92.208.4063.2	15	
		5.0	92.208.5003.2	10		92.208.5063.2	10	
		6.0	92.208.6003.2	10		92.208.6063.2	10	
		7.0	92.208.7003.2	5		92.208.7063.2	10	
		8.0	92.208.8003.2	5		92.208.8063.2	5	

Cable black/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
pebble gray	Code 2 2, N, PE, 1	1.0	92.208.1003.3	50		92.208.1063.3	50	
		2.0	92.208.2003.3	25		92.208.2063.3	25	
		3.0	92.208.3003.3	20		92.208.3063.3	20	
		4.0	92.208.4003.3	15		92.208.4063.3	15	
		5.0	92.208.5003.3	10		92.208.5063.3	10	
		6.0	92.208.6003.3	10		92.208.6063.3	10	
		7.0	92.208.7003.3	10		92.208.7063.3	10	
		8.0	92.208.8003.3	5		92.208.8063.3	5	

Other cables, other lengths, other codings on request




Cable assemblies, 4 pole, 2.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 10.8 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connection cables male – free end

Wire ends ultrason. welded

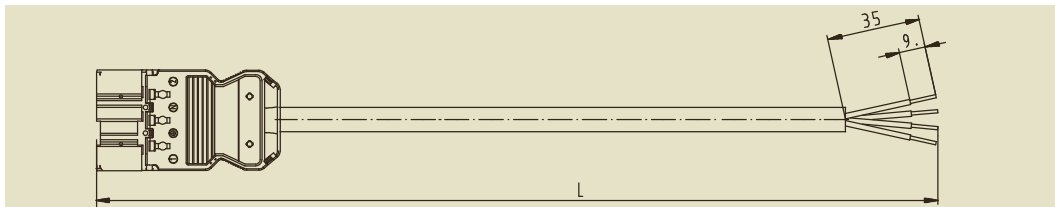

⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK

Cable black/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
black	Code 1 1, PE, N, 2	1.0	92.208.1004.1	50		92.208.1064.1	50		
		2.0	92.208.2004.1	25		92.208.2064.1	25		
		3.0	92.208.3004.1	20		92.208.3064.1	20		
		4.0	92.208.4004.1	15		92.208.4064.1	15		
		5.0	92.208.5004.1	10		92.208.5064.1	10		
		6.0	92.208.6004.1	10		92.208.6064.1	10		
		7.0	92.208.7004.1	5		92.208.7064.1	5		
		8.0	92.208.8004.1	5		92.208.8064.1	5		

Cable white/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
white	Code 1 1, PE, N, 2	1.0	92.208.1004.2	50		92.208.1064.2	50		
		2.0	92.208.2004.2	25		92.208.2064.2	25		
		3.0	92.208.3004.2	20		92.208.3064.2	20		
		4.0	92.208.4004.2	15		92.208.4064.2	15		
		5.0	92.208.5004.2	10		92.208.5064.2	10		
		6.0	92.208.6004.2	10		92.208.6064.2	10		
		7.0	92.208.7004.2	5		92.208.7064.2	10		
		8.0	92.208.8004.2	5		92.208.8064.2	5		

Cable black/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
pebble gray	Code 2 1, PE, N, 2	1.0	92.208.1004.3	50		92.208.1064.3	50		
		2.0	92.208.2004.3	25		92.208.2064.3	25		
		3.0	92.208.3004.3	20		92.208.3064.3	20		
		4.0	92.208.4004.3	15		92.208.4064.3	15		
		5.0	92.208.5004.3	10		92.208.5064.3	10		
		6.0	92.208.6004.3	10		92.208.6064.3	10		
		7.0	92.208.7004.3	5		92.208.7064.3	10		
		8.0	92.208.8004.3	5		92.208.8064.3	5		





GST18i4



Other cables, other lengths, other codings on request

Cable assemblies, 5 pole, 1.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 10.1 mm


Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male



Power 250/400 V:
 ⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK
 3 = GY

Power 250 V + dimming:
 ⊕ = GN/YE
 N = BU
 L = BN
 D2 = BK
 D1 = GY

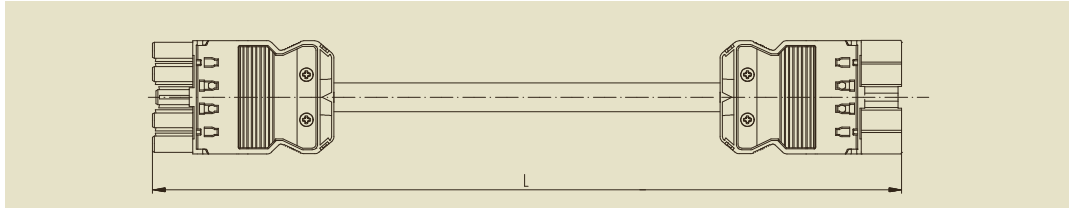

GST18i5


Cable black/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
black	Code 1 1, 2, PE, N, 3	1.0	92.257.1000.1	30		92.257.1060.1	30	
		2.0	92.257.2000.1	20		92.257.2060.1	20	
		3.0	92.257.3000.1	15		92.257.3060.1	15	
		4.0	92.257.4000.1	10		92.257.4060.1	10	
		5.0	92.257.5000.1	10		92.257.5060.1	10	
		6.0	92.257.6000.1	8		92.257.6060.1	8	
		7.0	92.257.7000.1	5		92.257.7060.1	5	
		8.0	92.257.8000.1	5		92.257.8060.1	5	

Cable white/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
white	Code 1 1, 2, PE, N, 3	1.0	92.257.1000.2	30		92.257.1060.2	30	
		2.0	92.257.2000.2	20		92.257.2060.2	20	
		3.0	92.257.3000.2	15		92.257.3060.2	15	
		4.0	92.257.4000.2	10		92.257.4060.2	10	
		5.0	92.257.5000.2	10		92.257.5060.2	10	
		6.0	92.257.6000.2	8		92.257.6060.2	8	
		7.0	92.257.7000.2	5		92.257.7060.2	5	
		8.0	92.257.8000.2	5		92.257.8060.2	5	

Cable black/coding		Length m	Cable H05VV-F			Cable H05Z1Z1-F		
			Part No.	P. U.	Price	Part No.	P. U.	Price
pastel blue	Code 2 D1, D2, PE, N, L	1.0	92.257.1000.9	30		92.257.1060.9	30	
		2.0	92.257.2000.9	20		92.257.2060.9	20	
		3.0	92.257.3000.9	15		92.257.3060.9	15	
		4.0	92.257.4000.9	10		92.257.4060.9	10	
		5.0	92.257.5000.9	10		92.257.5060.9	10	
		6.0	92.257.6000.9	8		92.257.6060.9	8	
		7.0	92.257.7000.9	5		92.257.7060.9	5	
		8.0	92.257.8000.9	5		92.257.8060.9	5	

Other cables, other lengths, other codings on request

Cable assemblies, 5 pole, 1.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 10.1 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories


Connection cables female – free end

Wire ends ultrason. welded



Power 250/400 V:
 ⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK
 3 = GY

Power 250 V + dimming:
 ⊕ = GN/YE
 N = BU
 L = BN
 D2 = BK
 D1 = GY

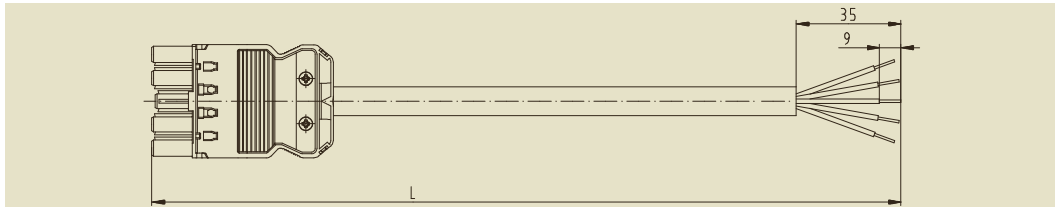

Cable black/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
black	Code 1 3, N, PE, 2, 1	1.0	92.257.1003.1	30		92.257.1063.1	30		
		2.0	92.257.2003.1	20		92.257.2063.1	20		
		3.0	92.257.3003.1	15		92.257.3063.1	15		
		4.0	92.257.4003.1	10		92.257.4063.1	10		
		5.0	92.257.5003.1	10		92.257.5063.1	10		
		6.0	92.257.6003.1	8		92.257.6063.1	8		
		7.0	92.257.7003.1	5		92.257.7063.1	5		
		8.0	92.257.8003.1	5		92.257.8063.1	5		

Cable white/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
white	Code 1 3, N, PE, 2, 1	1.0	92.257.1003.2	30		92.257.1063.2	30		
		2.0	92.257.2003.2	20		92.257.2063.2	20		
		3.0	92.257.3003.2	15		92.257.3063.2	15		
		4.0	92.257.4003.2	10		92.257.4063.2	10		
		5.0	92.257.5003.2	8		92.257.5063.2	10		
		6.0	92.257.6003.2	8		92.257.6063.2	8		
		7.0	92.257.7003.2	5		92.257.7063.2	5		
		8.0	92.257.8003.2	5		92.257.8063.2	5		

Cable black/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
pastel blue	Code 2 L, N, PE, D2, D1	1.0	92.257.1003.9	30		92.257.1063.9	30		
		2.0	92.257.2003.9	20		92.257.2063.9	20		
		3.0	92.257.3003.9	15		92.257.3063.9	15		
		4.0	92.257.4003.9	10		92.257.4063.9	10		
		5.0	92.257.5003.9	10		92.257.5063.9	10		
		6.0	92.257.6003.9	8		92.257.6063.9	8		
		7.0	92.257.7003.9	5		92.257.7063.9	5		
		8.0	92.257.8003.9	5		92.257.8063.9	5		





GST18i5



Other cables, other lengths, other codings on request

Cable assemblies, 5 pole, 1.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 10.1 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories


Connection cables male – free end

Wire ends ultrason. welded



Power 250/400 V:
 ⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK
 3 = GY

Power 250 V + dimming:
 ⊕ = GN/YE
 N = BU
 L = BN
 D2 = BK
 D1 = GY

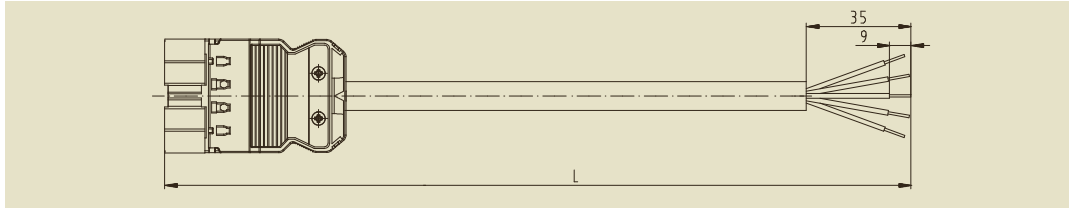



		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
black	Code 1 1, 2, PE, N, 3	1.0	92.257.1004.1	30		92.257.1064.1	30		
		2.0	92.257.2004.1	20		92.257.2064.1	20		
		3.0	92.257.3004.1	15		92.257.3064.1	15		
		4.0	92.257.4004.1	10		92.257.4064.1	10		
		5.0	92.257.5004.1	10		92.257.5064.1	10		
		6.0	92.257.6004.1	8		92.257.6064.1	8		
		7.0	92.257.7004.1	5		92.257.7064.1	5		
		8.0	92.257.8004.1	5		92.257.8064.1	5		

		Cable H05VV-F				Cable H05Z1Z1-F			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
white	Code 1 1, 2, PE, N, 3	1.0	92.257.1004.2	30		92.257.1064.2	30		
		2.0	92.257.2004.2	20		92.257.2064.2	20		
		3.0	92.257.3004.2	15		92.257.3064.2	15		
		4.0	92.257.4004.2	10		92.257.4064.2	10		
		5.0	92.257.5004.2	10		92.257.5064.2	10		
		6.0	92.257.6004.2	8		92.257.6064.2	8		
		7.0	92.257.7004.2	5		92.257.7064.2	5		
		8.0	92.257.8004.2	5		92.257.8064.2	5		

		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
pastel blue	Code 2 D1, D2, PE, N, L	1.0	92.257.1004.9	30		92.257.1064.9	30		
		2.0	92.257.2004.9	20		92.257.2064.9	20		
		3.0	92.257.3004.9	15		92.257.3064.9	15		
		4.0	92.257.4004.9	10		92.257.4064.9	10		
		5.0	92.257.5004.9	10		92.257.5064.9	10		
		6.0	92.257.6004.9	8		92.257.6064.9	8		
		7.0	92.257.7004.9	5		92.257.7064.9	5		
		8.0	92.257.8004.9	5		92.257.8064.9	5		

Other cables, other lengths, other codings on request

Cable assemblies, 5 pole, 2.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 12.1 mm


Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories

Connecting cables female – male



Power 250/400 V:
 ⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK
 3 = GY

Power 250 V + dimming:
 ⊕ = GN/YE
 N = BU
 L = BN
 D2 = BK
 D1 = GY

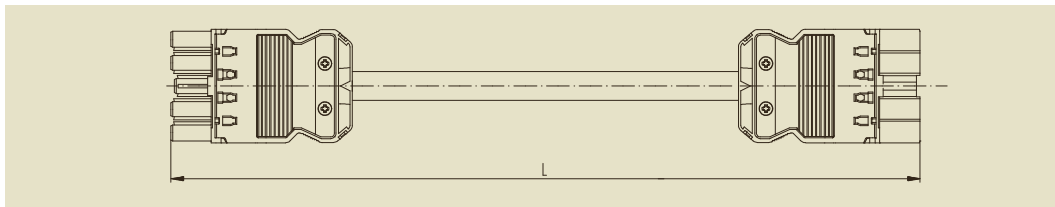

Cable black/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Length m	Part No.	P. U.	Price	Part No.	P. U.	Price			
black	Code 1 1, 2, PE, N, 3	1.0	92.258.1000.1	30	92.258.1060.1	30			
		2.0	92.258.2000.1	20	92.258.2060.1	15			
		3.0	92.258.3000.1	10	92.258.3060.1	10			
		4.0	92.258.4000.1	10	92.258.4060.1	10			
		5.0	92.258.5000.1	8	92.258.5060.1	8			
		6.0	92.258.6000.1	5	92.258.6060.1	5			
		7.0	92.258.7000.1	5	92.258.7060.1	5			
		8.0	92.258.8000.1	4	92.258.8060.1	4			

Cable white/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Length m	Part No.	P. U.	Price	Part No.	P. U.	Price			
white	Code 1 1, 2, PE, N, 3	1.0	92.258.1000.2	30	92.258.1060.2	30			
		2.0	92.258.2000.2	20	92.258.2060.2	15			
		3.0	92.258.3000.2	10	92.258.3060.2	10			
		4.0	92.258.4000.2	10	92.258.4060.2	10			
		5.0	92.258.5000.2	8	92.258.5060.2	8			
		6.0	92.258.6000.2	5	92.258.6060.2	5			
		7.0	92.258.7000.2	5	92.258.7060.2	5			
		8.0	92.258.8000.2	4	92.258.8060.2	4			

Cable black/coding		Cable H05VV-F				Cable H05Z1Z1-F			
Length m	Part No.	P. U.	Price	Part No.	P. U.	Price			
pastel blue	Code 2 D1, D2, PE, N, L	1.0	92.258.1000.9	30	92.258.1060.9	30			
		2.0	92.258.2000.9	20	92.258.2060.9	15			
		3.0	92.258.3000.9	10	92.258.3060.9	10			
		4.0	92.258.4000.9	10	92.258.4060.9	10			
		5.0	92.258.5000.9	8	92.258.5060.9	8			
		6.0	92.258.6000.9	5	92.258.6060.9	5			
		7.0	92.258.7000.9	5	92.258.7060.9	5			
		8.0	92.258.8000.9	4	92.258.8060.9	4			





GST18i5



Other cables, other lengths, other codings on request

Cable assemblies, 5 pole, 2.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 12.1 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories


Connection cables female – free end

Wire ends ultrason. welded



Power 250/400 V:
 ⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK
 3 = GY

Power 250 V + dimming:
 ⊕ = GN/YE
 N = BU
 L = BN
 D2 = BK
 D1 = GY

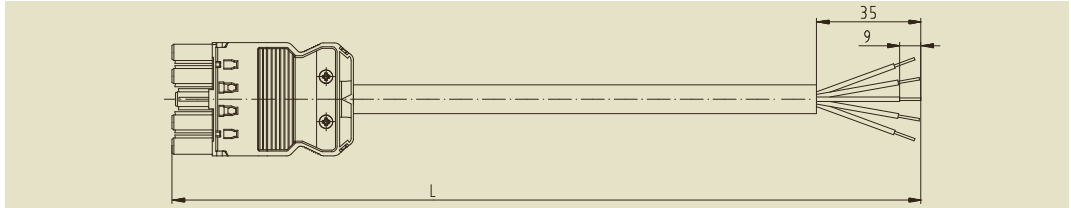


		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding		Length m	Part No.	P. U.	Price	Part No.	P. U.	Price	
black	Code 1 3, N, PE, 2, 1	1.0	92.258.1003.1	30		92.258.1063.1	30		
		2.0	92.258.2003.1	20		92.258.2063.1	15		
		3.0	92.258.3003.1	15		92.258.3063.1	15		
		4.0	92.258.4003.1	10		92.258.4063.1	10		
		5.0	92.258.5003.1	8		92.258.5063.1	8		
		6.0	92.258.6003.1	5		92.258.6063.1	5		
		7.0	92.258.7003.1	5		92.258.7063.1	5		
		8.0	92.258.8003.1	5		92.258.8063.1	5		

		Cable H05VV-F				Cable H05Z1Z1-F			
Cable white/coding		Length m	Part No.	P. U.	Price	Part No.	P. U.	Price	
white	Code 1 3, N, PE, 2, 1	1.0	92.258.1003.2	30		92.258.1063.2	30		
		2.0	92.258.2003.2	20		92.258.2063.2	20		
		3.0	92.258.3003.2	15		92.258.3063.2	15		
		4.0	92.258.4003.2	10		92.258.4063.2	10		
		5.0	92.258.5003.2	8		92.258.5063.2	8		
		6.0	92.258.6003.2	5		92.258.6063.2	5		
		7.0	92.258.7003.2	5		92.258.7063.2	5		
		8.0	92.258.8003.2	5		92.258.8063.2	5		

		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding		Length m	Part No.	P. U.	Price	Part No.	P. U.	Price	
pastel blue	Code 2 L, N, PE, D2, D1	1.0	92.258.1003.9	30		92.258.1063.9	30		
		2.0	92.258.2003.9	20		92.258.2063.9	15		
		3.0	92.258.3003.9	10		92.258.3063.9	10		
		4.0	92.258.4003.9	10		92.258.4063.9	8		
		5.0	92.258.5003.9	8		92.258.5063.9	5		
		6.0	92.258.6003.9	5		92.258.6063.9	5		
		7.0	92.258.7003.9	5		92.258.7063.9	5		
		8.0	92.258.8003.9	5		92.258.8063.9	4		

Other cables, other lengths, other codings on request

Cable assemblies, 5 pole, 2.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 20 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals: 
 Cable diameter: 12.1 mm

Cable material, H05VV-F: PVC, contains halogen
 Cable material, H05Z1Z1-F: halogen-free
 Sheath strip length: 35 mm
 Wire stripping length: 9 mm
 The use of a locking device is mandatory.
 Locking device for flying leads: see Accessories


Connection cables male – free end

Wire ends ultrason. welded



Power 250/400 V:
 ⊕ = GN/YE
 N = BU
 1 = BN
 2 = BK
 3 = GY

Power 250 V + dimming:
 ⊕ = GN/YE
 N = BU
 L = BN
 D2 = BK
 D1 = GY

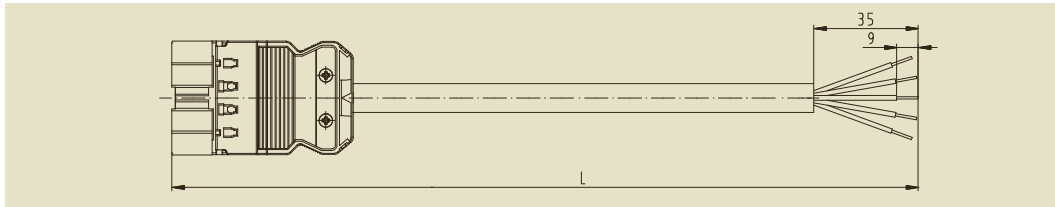

		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
black	Code 1 1, 2, PE, N, 3	1.0	92.258.1004.1	30		92.258.1064.1	30		
		2.0	92.258.2004.1	20		92.258.2064.1	15		
		3.0	92.258.3004.1	15		92.258.3064.1	15		
		4.0	92.258.4004.1	10		92.258.4064.1	10		
		5.0	92.258.5004.1	8		92.258.5064.1	8		
		6.0	92.258.6004.1	5		92.258.6064.1	5		
		7.0	92.258.7004.1	5		92.258.7064.1	5		
		8.0	92.258.8004.1	5		92.258.8064.1	5		

		Cable H05VV-F				Cable H05Z1Z1-F			
Cable white/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
white	Code 1 1, 2, PE, N, 3	1.0	92.258.1004.2	30		92.258.1064.2	30		
		2.0	92.258.2004.2	20		92.258.2064.2	20		
		3.0	92.258.3004.2	15		92.258.3064.2	15		
		4.0	92.258.4004.2	10		92.258.4064.2	10		
		5.0	92.258.5004.2	8		92.258.5064.2	8		
		6.0	92.258.6004.2	5		92.258.6064.2	5		
		7.0	92.258.7004.2	5		92.258.7064.2	5		
		8.0	92.258.8004.2	5		92.258.8064.2	5		

		Cable H05VV-F				Cable H05Z1Z1-F			
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price		
pastel blue	Code 2 D1, D2, PE, N, L	1.0	92.258.1004.9	30		92.258.1064.9	30		
		2.0	92.258.2004.9	20		92.258.2064.9	15		
		3.0	92.258.3004.9	15		92.258.3064.9	10		
		4.0	92.258.4004.9	10		92.258.4064.9	10		
		5.0	92.258.5004.9	8		92.258.5064.9	8		
		6.0	92.258.6004.9	5		92.258.6064.9	5		
		7.0	92.258.7004.9	5		92.258.7064.9	5		
		8.0	92.258.8004.9	5		92.258.8064.9	4		





GST18i5




Other cables, other lengths, other codings on request

Cable assemblies, 6 pole, 1.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 11.2 mm

Cable material, S05HH-F: halogen-free
 Cable material, LSOH as per BS7211: halogen-free
 The use of a locking device is mandatory.

Connecting cables female – male

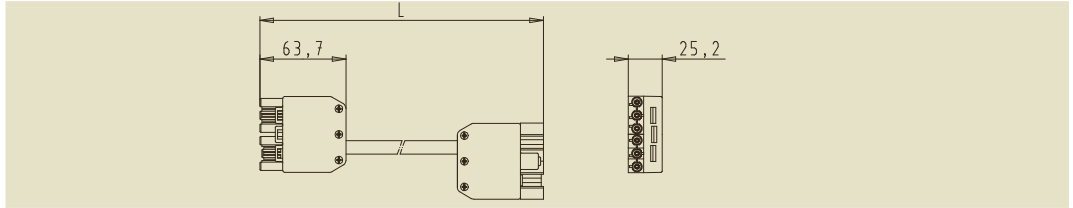


Cable S05HH-F					Cable LSOH as per BS7211		
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black/ pastel blue	Code 1	1.0	99.411.0028.0	30			
		2.0	99.412.0028.0	20		G1.066.0202.7	
		3.0	99.413.0028.0	10		G1.066.0302.7	
		4.0	99.414.0028.0	10		G1.066.0402.7	
		5.0	99.415.0028.0	8		G1.066.0502.7	
		6.0	99.416.0028.0	5		G1.066.0602.7	
		7.0	99.417.0028.0	5		G1.066.0702.7	
		8.0	99.418.0028.0	5			
		9.0					
		10.0					G1.066.1002.7



Power 250 V + dimming:
 ⊕ = GN/YE
 N = BU
 L1 = BN
 1 = BK
 2 = RT
 3 = WS

Connection cables female – free end
 Wire ends ultrason. welded

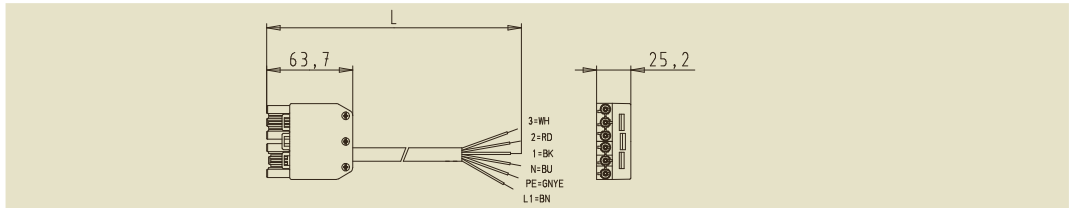

Cable S05HH-F					Cable LSOH as per BS7211		
Cable black/coding	Length m	Part No.	P. U.	Price	Part No.	P. U.	Price
black/ pastel blue	Code 1	1.0	99.431.0028.0	30			
		2.0	99.432.0028.0	20		G1.366.0202.7	
		3.0	99.433.0028.0	10		G1.366.0302.7	
		4.0	99.434.0028.0	10		G1.366.0402.7	
		5.0	99.435.0028.0	8		G1.366.0502.7	
		6.0	99.436.0028.0	5		G1.366.0602.7	
		7.0	99.437.0028.0	5		G1.366.0702.7	
		8.0	99.438.0028.0	5			
		9.0					
		10.0					G1.366.1002.7





Power 250 V + dimming:
 ⊕ = GN/YE
 N = BU
 L1 = BN
 1 = BK
 2 = RT
 3 = WS

Other cables, other lengths, other codings on request




Cable assemblies, 6 pole, 1.5 mm²

Rated voltage: 250 V / 400 V
 Rated current: 16 A
 Rated impulse voltage: 4 kV
 Protection rating: IP20, IP40 when plugged
 Approvals:  
 Cable diameter: 11.2 mm

Cable material, S05HH-F: halogen-free
 Cable material, LSOH as per BS7211: halogen-free
 The use of a locking device is mandatory.

Connection cables male – free end
 Wire ends ultrason. welded

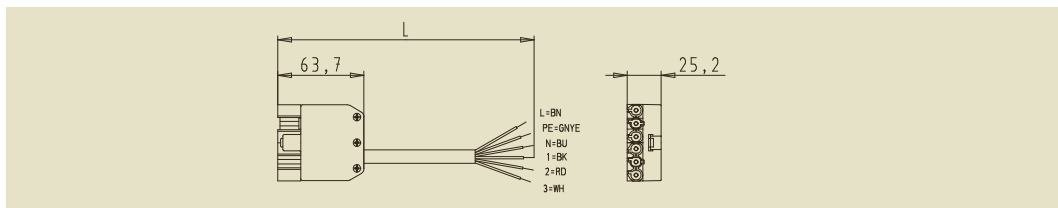

Cable black/coding	Length m	Cable S05HH-F			Cable LSOH as per BS7211		
		Part No.	P. U.	Price	Part No.	P. U.	Price
black/ pastel blue	1.0	99.451.0028.0	30				
	2.0	99.452.0028.0	20		G1.466.0202.7		
	3.0	99.453.0028.0	10		G1.466.0302.7		
	4.0	99.454.0028.0	10		G1.466.0402.7		
	5.0	99.455.0028.0	8		G1.466.0502.7		
	6.0	99.456.0028.0	5		G1.466.0602.7		
	7.0	99.457.0028.0	5		G1.466.0702.7		
	8.0	99.458.0028.0	5				
	9.0						
	10.0				G1.466.1002.7		



Power 250 V + dimming:

- ⊕ = GN/YE
- N = BU
- L1 = BN
- 1 = BK
- 2 = RT
- 3 = WS



GST18i6



Other cables, other lengths, other codings on request