




EPIC® DATA CAN Sub-D

CAN Bus-Connectors with screw connection

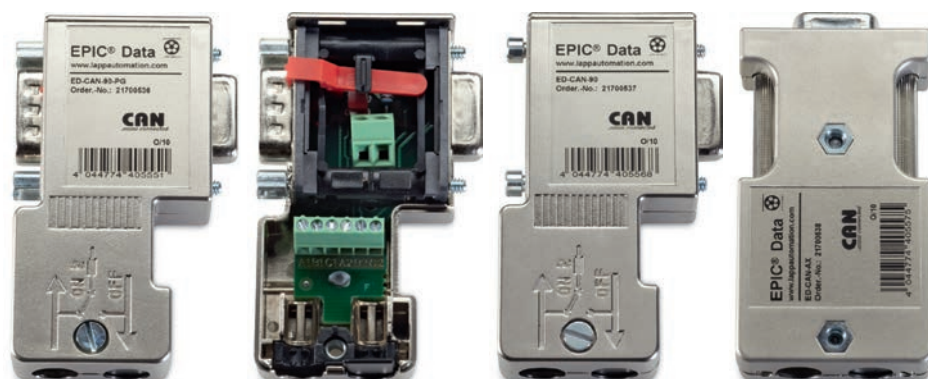

Benefits

- Terminating resistor (integrated) can be switched
- Sensor/ ac
- No loose parts
- With additional 24 V DC output to supply external devices (90° version only)

Product features

- Max. transmission rate 1 Mbit/s possible
- Terminating resistor "ON" - the outbound bus cable is disconnected
- The integrated, connectable terminating resistor enable the CAN-Bus to be terminated or connected through
- Sub-D pin assignment:
CAN Low = Pin 2
CAN High = Pin 7
CAN Gnd = Pin 3
GND = Pin 6 (90° version only)
CAN V+ = Pin 9 (90° version only)
(shield = housing)

Norm references / Approvals

- UL File No. E331560

Product Make-up

- D-Sub plug, 9-pin, fixing screws 4-40 UNC
- Screw connection
- Improved electromagnetic compatibility (EMC) by metallized housing
- For cable outer diameter: 5 - 8 mm

Suitable cables

- Bus system CAN / DeviceNet

Suitable tools

- Kraftform® adjustable torque screwdriver/ Kraftform Kompakt® Set refer to page 1060

Technical data

Classification ETIM 5/6
ETIM 5.0/6.0 Class-ID: EC001132
ETIM 5.0/6.0 Class-Description:
D-Sub connector

Dimensions
60 mm x 40 mm x 17 mm - 90°
67,5 mm x 35 mm x 17 mm - 180°
(LxWxH)

Connection type
Screwing

Protection rating
IP 20

Terminating resistor
120 Ω

Interfaces
CAN bus station:
D-Sub socket, 9-pin
CAN bus cable:
6 terminal blocks for wires up to
0.8 mm²

Permissible ambient conditions
Operating temperature: -25°C to +85°C
*The max. temperature for UL is 60 °C.

Article number	Article designation	Cable outlet	PG-Interface	PU
Sub-D connector				
21700537	ED-CAN-90	90°	no	1
21700536	ED-CAN-90-PG	90°	yes	1
21700538	ED-CAN-AX	180° axial	no	1

DeviceNet is a registered trademark of ODVA

Photographs and graphics are not to scale and do not represent detailed images of the respective products.