



EPIC® H-BE 24 Screw termination

The proven standard inserts for easy assembly



Info

- Proven screw for easy installation
- Screw, crimp, cage clamp and Push-In version - freely combinable
- Also as EPIC® H-BE 48 available

EPIC® H-BE 24 Crimp termination

The proven standard inserts for easy assembly




Info

- For wire connection up to 4 mm²
- Screw, crimp, cage clamp and Push-In version - freely combinable
- Also as EPIC® H-BE 48 available

EPIC® H-BE 24 Cage clamp

The proven standard inserts for easy assembly

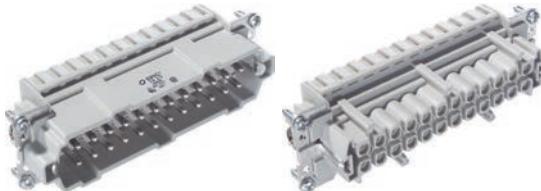

Info

- Multifunctional insert for versatile applications
- Screw, crimp, cage clamp and Push-In version - freely combinable
- Also as EPIC® H-BE 48 available

EPIC® H-BE 24 Push-In termination

The proven standard inserts for easy assembly



Info

- Push-In version - fast and easy tool free connection technology
- Screw, crimp, cage clamp and Push-In version - freely combinable
- Multifunctional insert for versatile applications

Suitable housing

- EPIC® ULTRA H-B 24
- EPIC® H-B 24 Housings
- EPIC® QUICK & EASY Mounting system
- Refer to Selection Table A10 to select the required inserts and housings

Suitable contacts:

EPIC® H-BE 24 Crimp termination

- EPIC® H-BE 2.5 machined contacts
Page 590

Similar products

- Further products with higher numbering in the internet. (H-BE 32, H-BE 48)

Benefits

- Standard inserts with screw, crimp cage clamp and Push-In termination

- The EPIC® H-BE series is suitable for applications that require a reliable connection when working with high voltages and currents EPIC® H-BE 24 Screw termination

EPIC® H-BE 24 Crimp termination

- Railway applications
 - Fire protection on railway vehicles: Test according EN 45545-2. Requirement sets R22 and R23. Hazard level HL1, HL2 and HL4
- UL tested for application in control cabinets according UL 508 / UL 2237

EPIC® H-BE 24 Push-In termination

- Insertion of cores with end sleeves in Push-In inserts gives mounting safety and time saving without any tools
- Easy dismantling and insertion of wires by pushing the orange button
- Test socket for standard 2mm test tip for easy testing of Push-In inserts

Railway applications

- Fire protection on railway vehicles: Test according EN 45545-2. Requirement sets R22 and R23. Hazard level HL1, HL2 and HL4

Application range

- Mechanical engineering
- Light & sound technology
- Plastics industry

EPIC® H-BE 24 Push-In termination

EPIC® H-BE 24 Screw termination

- Railway applications / vehicle construction

Suitable tools

EPIC® H-BE 24 Screw termination

- Kraftform® adjustable torque screwdriver / Kraftform Kompakt® Set refer to page 1060

Technical data

| | | | |
|--|---|--|--|
| | Classification ETIM 5/6 ETIM 5.0/6.0 Class-ID: EC000438 ETIM 5.0/6.0 Class-Description: Contact insert for industrial connectors | | Termination methods EPIC® H-BE 24 Screw termination Screw termination: 0.5 - 2.5 mm ² EPIC® H-BE 24 Crimp termination Crimp termination: 0.5 - 4.0 mm ² EPIC® H-BE 24 Cage clamp Cage clamp termination: 0.5 - 2.5 mm ² EPIC® H-BE 24 Push-In termination Push-In termination: 0.14 - 2.5mm ² |
| | Rated voltage (V) IEC: 500 VUL: 600 VCSA: 600 V | | Stripping length (mm) EPIC® H-BE 24 Screw termination 8 |
| | Rated impulse voltage 6 kV | | EPIC® H-BE 24 Cage clamp 7 |
| | Rated current (A) EPIC® H-BE 24 Screw termination EPIC® H-BE 24 Crimp termination EPIC® H-BE 24 Cage clamp IEC: 16 A UL: 16 A CSA: 16 A | | EPIC® H-BE 24 Push-In termination 10 |
| | Pollution degree 3 | | Material EPIC® H-BE 24 Screw termination PC, polycarbonate EPIC® H-BE 24 Push-In termination PA Polyamid |
| | Flammability EPIC® H-BE 24 Screw termination UL94 V-0 EPIC® H-BE 24 Crimp termination UL94 V-0 EPIC® H-BE 24 Cage clamp UL94 V-2 EPIC® H-BE 24 Push-In termination UL94 V-0 | | Cycle of mechanical operation EPIC® H-BE 24 Screw termination 500 EPIC® H-BE 24 Crimp termination 100 EPIC® H-BE 24 Cage clamp 100 EPIC® H-BE 24 Push-In termination 500 |
| | Contact resistance EPIC® H-BE 24 Screw termination < 2 mOhm EPIC® H-BE 24 Crimp termination < 2 mOhm EPIC® H-BE 24 Cage clamp 1.5 - 4 mohm EPIC® H-BE 24 Push-In termination < 2 mOhm | | Certifications EPIC® H-BE 24 Screw termination Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770 and E483837 EPIC® H-BE 24 Crimp termination Certified production control: VDE-REG. no.: B437 UL-tested: UL File Number: E75770 EPIC® H-BE 24 Cage clamp UL-tested: UL File Number: E75770 EPIC® H-BE 24 Push-In termination UL-tested: UL File Number: E75770 |
| | Contacts EPIC® H-BE 24 Screw termination Copper alloy, hard silver-plated EPIC® H-BE 24 Crimp termination Copper alloy, hard silver/gold-plated EPIC® H-BE 24 Cage clamp Copper alloy, hard silver-plated EPIC® H-BE 24 Push-In termination Copper alloy, hard silver-plated | | Temperature range -40°C to +100°C, short-term up to +125°C |
| | Number of contacts 24 + PE | | |

| Article number | Article description | Contact type | Wire protection | Number of operating contacts | Pieces / PU |
|---------------------------------------|---------------------|--------------|-----------------|------------------------------|-------------|
| H-BE 24 screw termination | | | | | |
| 10196000 | EPIC® H-BE 24 SS | male | yes | 1 - 24 | 5 |
| 10197000 | EPIC® H-BE 24 BS | female | yes | 1 - 24 | 5 |
| 10196100 | EPIC® H-BE 24 SS | male | | 1 - 24 | 5 |
| 10197100 | EPIC® H-BE 24 BS | female | | 1 - 24 | 5 |
| H-BE 24 crimp termination | | | | | |
| 10186000 | EPIC® H-BE 24 SCM | male | | 1 - 24 | 5 |
| 10187000 | EPIC® H-BE 24 BCM | female | | 1 - 24 | 5 |
| H-BE 24 cage clamp termination | | | | | |
| 10400300 | EPIC® H-BE 24 SF | male | yes | 1 - 24 | 5 |
| 10401300 | EPIC® H-BE 24 BF | female | yes | 1 - 24 | 5 |
| H-BE 24 Push-In termination | | | | | |
| 44423206 | EPIC® H-BE 24 SP | male | yes | 1 - 24 | 5 |
| 44423207 | EPIC® H-BE 24 BP | female | yes | 1 - 24 | 5 |

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Similar products

- Further products with higher numbering in the internet. (H-BE 32, H-BE 48)