




EPIC® TB-H-BE 16

For convenient, clear wiring in control cabinets.
 Assembly in panel-mount base housings.

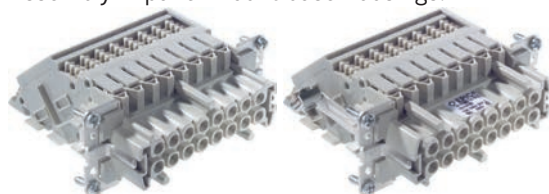


Info

- Plug connection for control cabinets
- Size with 6 and 10 contacts online

EPIC® TB-H-BE 24

For convenient, clear wiring in control cabinets.
 Assembly in panel-mount base housings.

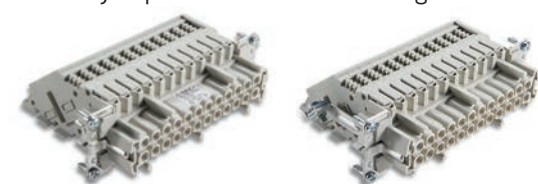

Info

- Plug connection for control cabinets
- Size with 6 and 10 contacts online

Suitable housing

EPIC® TB-H-BE 16

- EPIC® ULTRA H-B 16 AG QB Page 616
- EPIC® H-B 16 AG-L
- EPIC® H-B 16 AD-LB
- EPIC® H-B 16 AG
- EPIC® H-B 16 AD-BO
- EPIC® H-B 16 AG-ZR

EPIC® TB-H-BE 24

- EPIC® ULTRA H-B 24 AG QB Page 621
- EPIC® H-B 24 AG-LB
- EPIC® H-B 24 AD-LB
- EPIC® H-B 24 AG
- EPIC® H-B 24 AD-BO
- EPIC® H-B 24 AG-ZR

Benefits

- Standard H-BE inserts for use with switch cabinets
- Pluggable with H-BE male inserts in hoods
- Fastening on side = "left" means that when mounting the terminal adapter on the left wall of a control cabinet, the PE connection and pin "1" are on the "top" side

Application range

- Control cabinet manufacturing
- Plant engineering

Technical data

	Classification ETIM 5/6 ETIM 5.0/6.0 Class-ID: EC000438 ETIM 5.0/6.0 Class-Description: Contact insert for industrial connectors		Number of contacts EPIC® TB-H-BE 16 16 + PE EPIC® TB-H-BE 24 24 + PE
	Rated voltage (V) IEC: 500 VUL: 600 VCSA: 600 V		Termination methods Screw termination: 0.5 - 4.0 mm ²
	Rated impulse voltage 6 kV		Stripping length (mm) 13
	Rated current (A) IEC: 16 A UL: 16 A CSA: 16 A		Cycle of mechanical operation 200
	Pollution degree 3		VDE-tested UL-tested: UL File Number: E75770
	Contacts Copper alloy, hard silver-plated		Temperature range -40°C to +100°C, short-term up to +125°C

Article number	Article description	Contact type	Fastening on side	Number of operating contacts	Pieces / PU
16-pin terminal adapter					
70315100	TB-H-BE 16 BRE	female	right	1 - 16	10
70314100	TB-H-BE 16 BLI	female	left	1 - 16	10
24-pin terminal adapter					
70317100	TB-H-BE 24 BRE	female	right	1 - 24	10
70316100	TB-H-BE 24 BLI	female	left	1 - 24	10

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

ÖLFLEX®
 UNITRONIC®
 ETHERLINE®
 HITRONIC®
 EPIC®
 SKINTOP®
 SILVYN®
 FLEXIMARK®
 ACCESSORIES
 APPENDIX