

EPIC[®] Industrial connectors

Rectangular connectors • EPIC® ULTRA H-B 10



EPIC[®] ULTRA H-B 10 TS QB

EPIC® ULTRA H-B 10 AG QB

The robust and reliable industry connector housing as EMC version

The robust and reliable industry connector housing as EMC version

Info

· EMC protection


Info EMC protection Corrosion-resistant

- · Corrosion-resistant
- SKINTOP[®] integrated cable gland



ÖLFLEX

ACCESSORIES

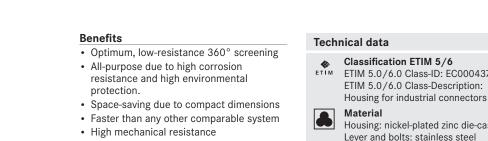

Application range

- In EMC-sensitive environments
- · For fixed and flexible applications (e.g. machinery building, wind turbines)
- Construction machinery
- · Electric motor manufacturing

Product features

- Housings with the BRUSH addition come with BRUSH cable screen contacting
- · Pluggable with standard housings
- Corrosion-resistant according to DIN EN 6988
- · Resistance to cyclic salt spray is tested according to IEC 68-2-52, severity level 2
- Salt spray testing according to DIN EN ISO 9227, method NSS, period of test 480 hours

Suitable inserts

• Refer to Selection Table A10 to select the required inserts and housings

Article number	Article description	Clamping range in mm	Minimum Ø above braiding (mm)	Pieces / PU
H-B housing: hood (side cable entry, bolts for double lever)				
70250210	ULTRA H-B 10 TS QB 7-15	7 - 15		1
70250265	ULTRA H-B 10 TS QB 7-15 BRUSH	7 - 15	8	1
70250211	ULTRA H-B 10 TS QB 11-21	11 - 21		1
70250212	ULTRA H-B 10 TS QB 11-21 BRUSH	11 - 21	8	1
H-B housing: panel-mount base (double lever)				
70250213	ULTRA H-B 10 AG QB			1

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

- ETIM 5.0/6.0 Class-ID: EC000437 ETIM 5.0/6.0 Class-Description:
- Housing: nickel-plated zinc die-casting Lever and bolts: stainless steel Sealing: NBR Cable gland Body: nickel-plated brass Insert: PA Seal: special elastomer



Protection rating IP 68

NEMA 250, UL50E: 12, 4, 4X (latched) Temperature range

-40°C to +100°C



