




SKINDICHT® BLK / BLK-GL

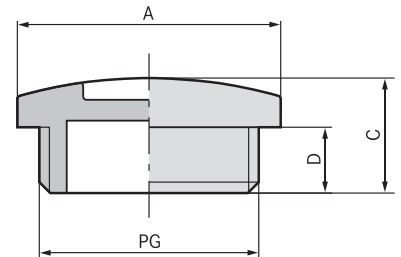

Benefits

- For closing pre-threaded holes

Application range

- Control cabinet manufacturing
- Distribution box
- Junction boxes

Product Make-up

- PG connection thread

Note

- SKINDICHT® BLK-GL offers high stability due to glass fibre reinforcement

Technical data

- Classification ETIM 5/6**
ETIM 5.0/6.0 Class-ID: EC000032
ETIM 5.0/6.0 Class-Description: Plug for cable screw gland
- On request**
with O-ring fitted
- Colour delivered**
Light grey (RAL 7035)
- Material**
BLK: polystyrene
BLK-GL: glass fibre-reinforced polyamide
- Protection rating**
IP 54
IP 68 (with O-Ring)
- Temperature range**
BLK: -20°C to +70°C
BLK-GL: -40°C to +100°C

Article number	Article designation / size	Thread length, D (mm)	Pieces / PU
SKINDICHT® BLK			
52005949	PG 7	6	100
52005950	PG 9	6	100
52005960	PG 11	6	100
52005970	PG 13,5	6	100
52005980	PG 16	6	100
52005990	PG 21	8	50
52006000	PG 29	8	50
52006010	PG 36	10	25
52006020	PG 42	10	25
52006030	PG 48	12	25
SKINDICHT® BLK-GL			
52024848	PG 7	6	100
52024849	PG 9	6	100
52024850	PG 11	6	100
52024851	PG 13,5	6	100
52024852	PG 16	6	100
52024853	PG 21	8	50
52024854	PG 29	8	50
52024855	PG 36	10	25
52024856	PG 42	10	25
52024857	PG 48	12	25

Photographs and graphics are not to scale and do not represent detailed images of the respective products.