

## Data sheet

Commercial Art.No.: R1.100.0626.0

magnet switch set SMA 0626

safety switch and magnet, manipulation safe, rectangle-shaped design, dimensions LxWxH: 88x25x14mm, normally open / normally open contact, protection category: IP67, cable length: 10m



Commercial Art.No.	R1.100.0626.0
EAN	4049088175428
Order Unit	1

## Technical data

### general

suitable for safety functions	yes
housing material	plastic
number of protected contact energized outputs	2
type of electric connection	cable
cable length	10 m
construction type housing	cuboid
protected switch distance ON	4 mm
protected switch distance OFF	16 mm
cross-/short circuit identification possible	yes
degree of protection (IP)	IP67
type of actuation	magnet

### safety parameters

category (ISO 13849-1)	4
PL (ISO 13849-1)	level e
SIL <sub>CL</sub> (IEC 62061)	3
HFT	1
T <sub>M</sub>	20 a

### output circuit

max. output current at protected output	200 mA
min. output current	5 mA
min. rated supply voltage at DC	5 V
max. rated supply voltage at DC	48 V

### other

voltage type	DC
number of protected semiconductor outputs	0
type of switch output	other

### dimensions

width sensor	25 mm
height of sensor	14 mm
length of sensor	88 mm

**classification**

ECLASS 11	
ECLASS 8.1	27270105
ETIM 9.0	EC002544
ETIM 8.0	EC002544
ETIM 7.0	EC002544
ETIM 6.0	EC002544
ETIM 5.0	EC002544
ETIM 4.0	EC002544


**product compliance**

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant

**Accessories**

Commercial Art.No.:	Article-type description:	Description:
R1.100.5004.0	connection cable M8 SMA 5004	M8 cable female, 4-pole, end cut off, cable length: 5m
R1.100.5005.0	connection cable M8 SMA 5005	M8 cable female, 4-pole, end cut off, cable length: 10m

Qu - PEE 12/92

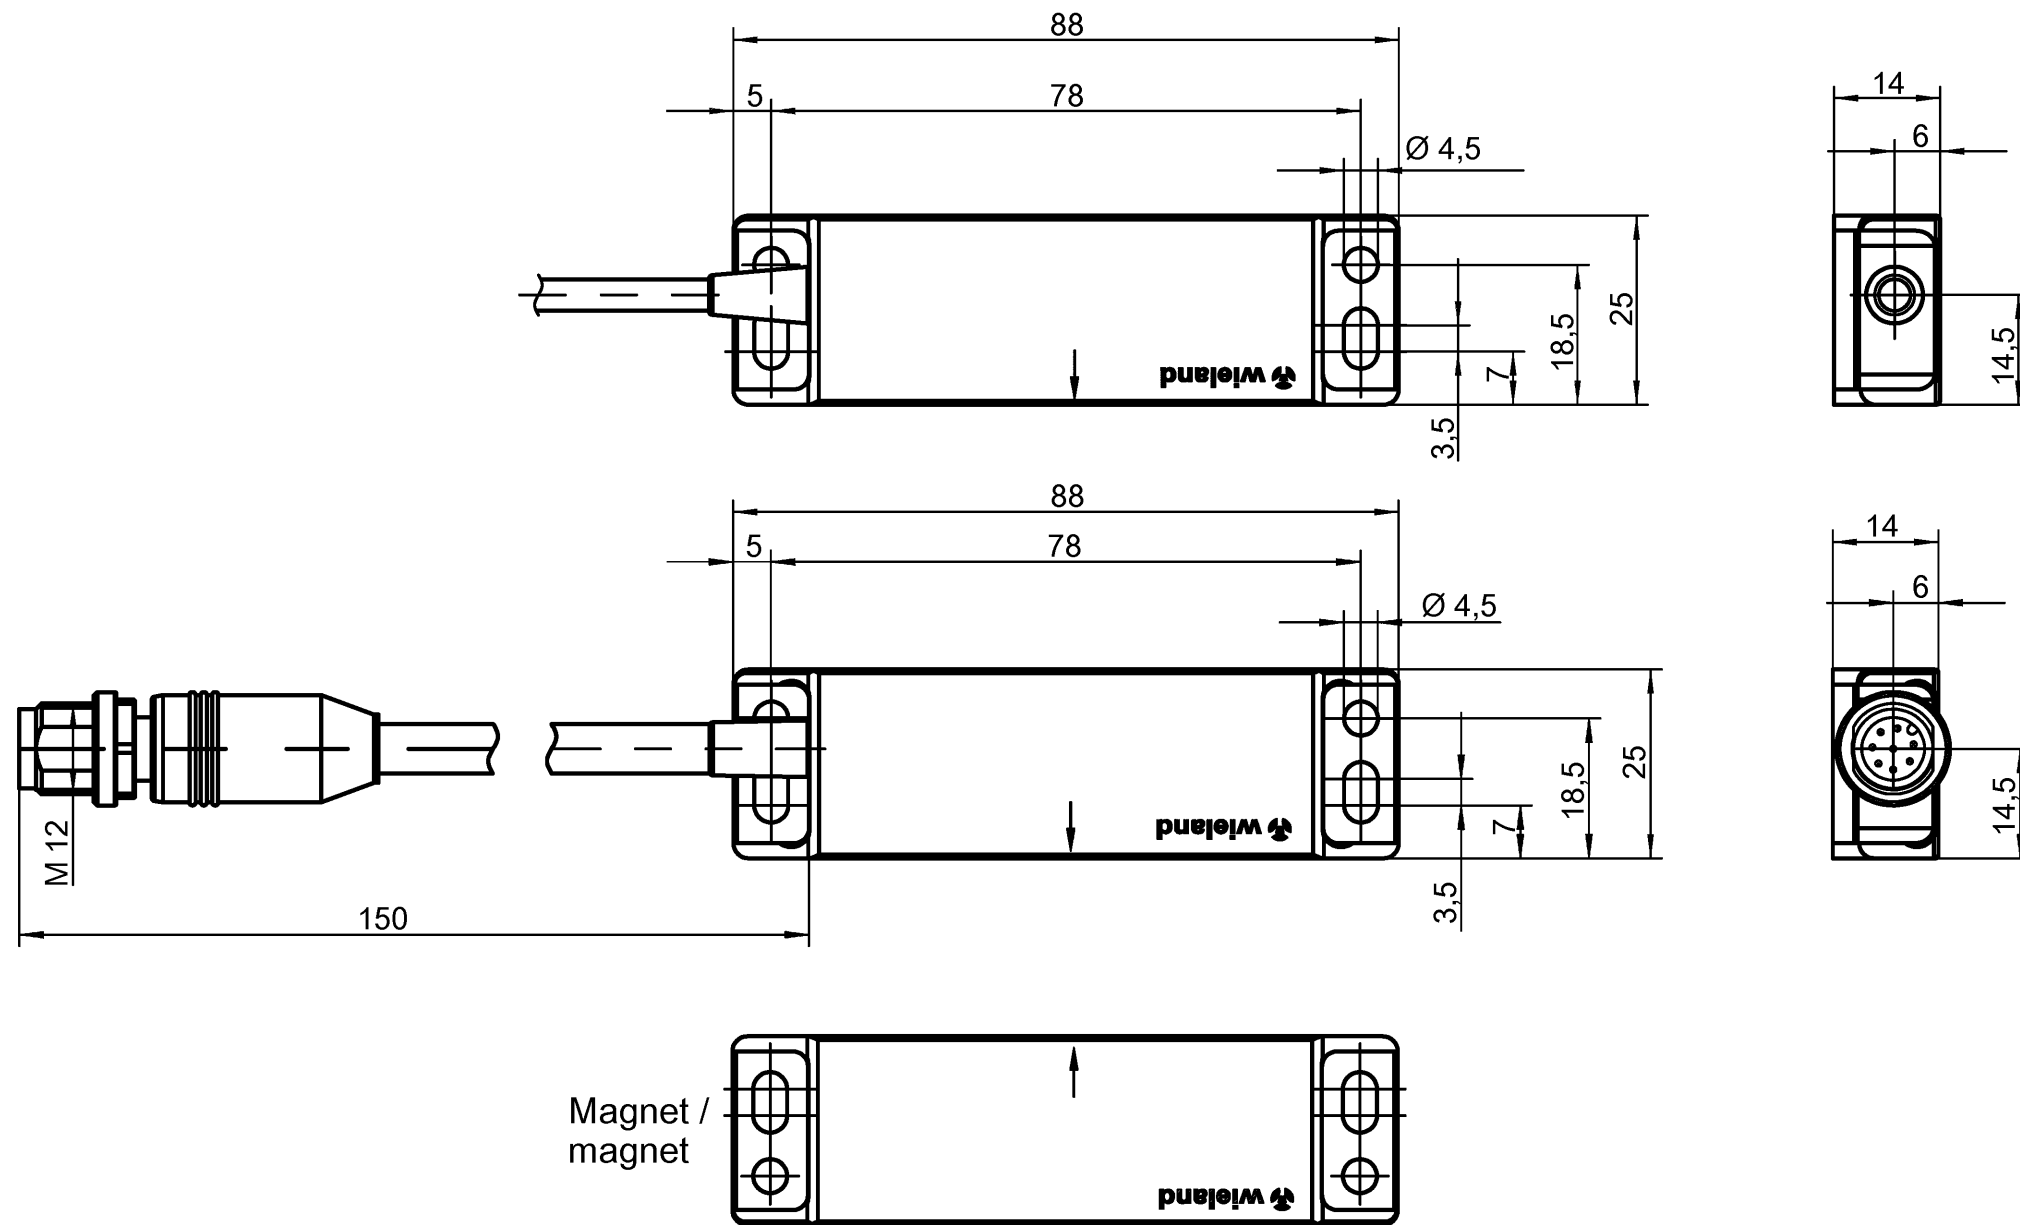

Teile-Nr. / Part-No.	Anschluss / connection
R1.100.0213.0	PVC cable - 3 m
R1.100.0223.0	PVC cable - 3 m
R1.100.0224.0	PVC cable - 5 m
R1.100.0226.0	PVC cable - 10 m
R1.100.0228.0	PVC cable - 20 m
R1.100.0233.0	PVC cable - 3 m
R1.100.0236.0	PVC cable - 10 000 m
R1.100.0243.0	PVC cable - 3 m
R1.100.0249.0	M12-8
R1.100.0613.0	PVC cable - 3 m
R1.100.0623.0	PVC cable - 3 m
R1.100.0626.0	PVC cable - 10 m

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog.				www.wieland-electric.com eshop.wieland-electric.com	
ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!					
Freitoleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD drawing, no manual modifications allowed		1. Verwendung: First Use:	Blatt: Sheet:
		Werkstoff / Material	2015 gezeichnet drawn	Tag/Date 26.05.	Name Koetzner
		Maßstab/Scale	geprüft checked		
		Datei / File: 028691_B01K.DCD	Normgepr. Stand. check		
		Ersatz für / Replacement for:	Zeichnung Nr. / Drawing No. <b>T R1.100.0213.0 01K</b>		
		Maße in mm / Dimensions are in mm			
(b) 11.02.20 (a) 11.11.15 Index Datum / Blatt Date / Sheet Änderung / Revision		 www.wieland-electric.com	Type	Benennung / Title Teilespezifikation / Component specification <b>SMA Magnetschalter rechteckig / Machine safety switch, rectangular</b>	

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
M1  
M2  
M3  
L  
G  
i  
11.1  
12.1  
1.1