


Data sheet

Commercial Art.No.: R1.180.0440.0

PLC digital I/O-module SA-OR-S2-2RK-C DC 24V

samos output module, 1x2 enabling current paths 1x2 signalling outputs, DC 24 V, push-in-terminals pluggable

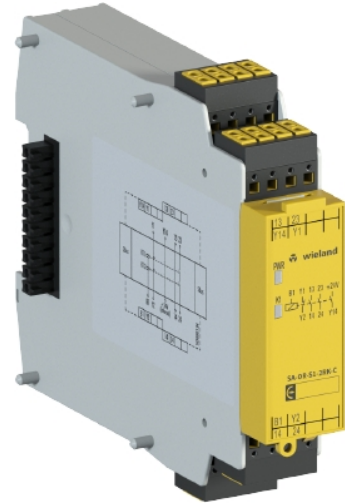

Commercial Art.No.	R1.180.0440.0
EAN	4046521297778
Order Unit	1

certificates / approvals



Technical data

general

SIL according to IEC 61508	3
in-/outputs configurable	yes

connection data

type of electric connection	spring clamp connection
-----------------------------	-------------------------

safety parameters

category (ISO 13849-1)	4
PL (ISO 13849-1)	level e
SIL _{CL} (IEC 62061)	3
HFT	1
T _M	20 a

output circuit

number of outputs	3
output current	6 A
short-circuit protection, outputs	no
type of digital output	relay
min. allowed output voltage	5 V
max. allowed output voltage	230 V

other

suitable for safety functions	yes
type of supply voltage	DC

control circuit

number of inputs	0
------------------	---

supply circuit

min. supply voltage at DC	19.2 V
max. supply voltage at DC	30 V

dimensions



depth	121 mm
width	22.5 mm
height	96.5 mm

classification

ECLASS 11	
ECLASS 8.1	27242204
ETIM 9.0	EC001419
ETIM 8.0	EC001419
ETIM 7.0	EC001419
ETIM 6.0	EC001419
ETIM 5.0	EC001419
ETIM 4.0	EC001419
ETIM 3.0	EC001419

product compliance

ROHS conformity status	compliant/exempted
ROHS exceptions	III-7(c)I
REACH-SVHC conformity status	compliant

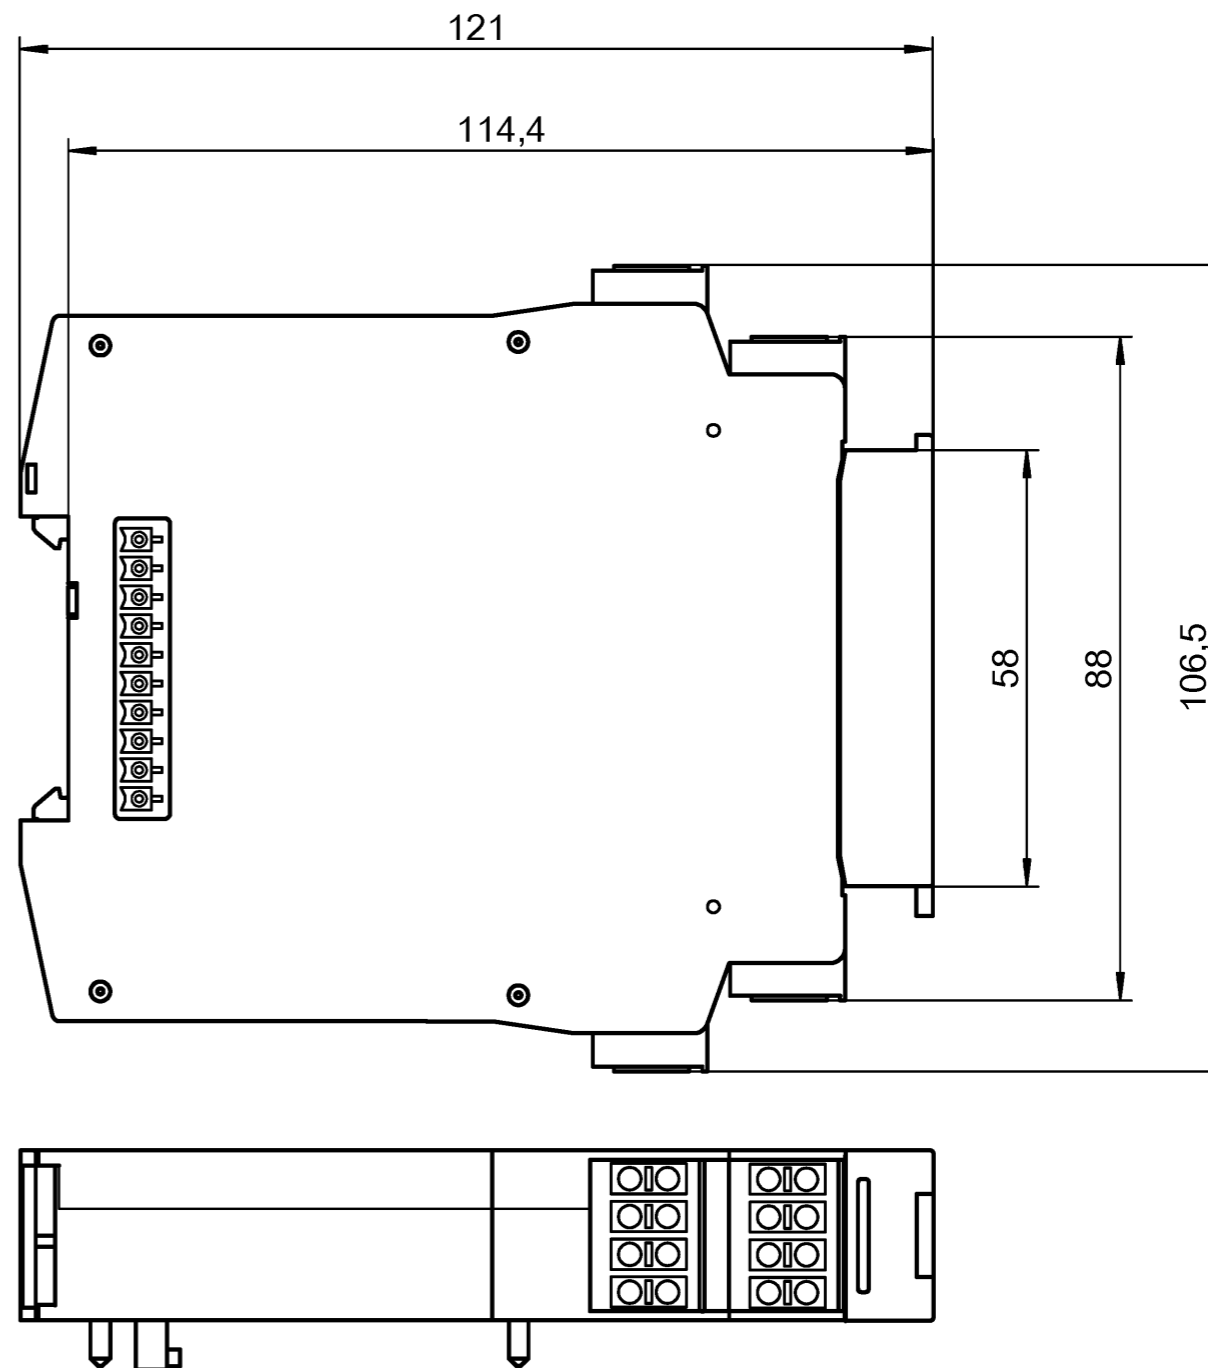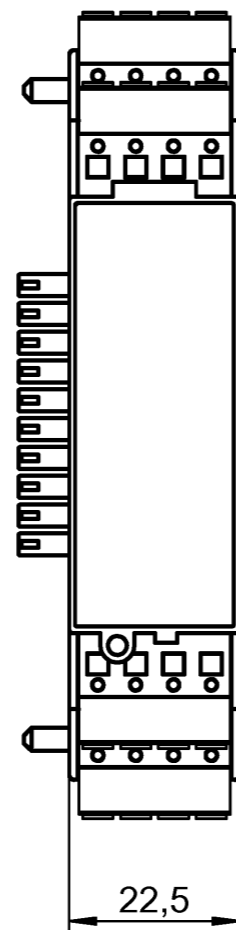

Weitere Angaben siehe KATALOG oder eKatalog. www.wieland-electric.com
 Additional data see CATALOG or eCatalog. eshop.wieland-electric.com

ja/yes <input type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!		2014 Tag/Date gezeichnet drawn 06.06. Koetzner		1. Verwendung: First Use:		Blatt: Sheet:	
Freitoleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD drawing, no manual modifications allowed		Zeichnung Nr. / Drawing No. R1.180.0420.0 01K		Maße in mm / Dimensions are in mm	
Werkstoff / Material		Maßstab/Scale		Elektronische Freigabe Electronic Release		Datei / File: 031161_B01K_R1.180.0420.0.DCD	
Datum / Blatt Date / Sheet		Ersatz für / Replacement for:		Type		Benennung / Title	
Änderung / Revision		wieland		Mabildzeichnung/dimension drawing Standardgehuse mit Busstecker u. Zapfen Baubreite 22,5mm, Federkraftklemme steckbar standard housing with bus connector and pin overall 22,5mm, plug-in clamp-spring terminal		07.05.24 02.09.16	

A
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
M1
M2
M3
L
G
i
11.1
12.1
1.1