

## Data sheet

Commercial Art.No.: R1.188.2450.0

device for monitoring of safety-related circuits SNO4063K-C AC/DC 24V

Base unit, single-channel or dual-channel control, automatic-/manual reset with reset switch monitoring, 3 enabling current paths, AC/DC 24 V 50-60Hz, push-in terminals pluggable



Commercial Art.No.	R1.188.2450.0
EAN	4046521301260
Order Unit	1

certificates / approvals



## Technical data

### general

function display	3 LED, green
creepage distances and clearances between the circuits	EN 60664-1
protection degree according to DIN EN 60529 (housing)	IP40
protection degree according to DIN EN 60529 (terminals)	IP20
ambient temperature min.	-25 °C
ambient temperature max.	55 °C
permissible torque min.	0.5 Nm
permissible torque max.	0.6 Nm
tightening moment	0.6 Nm
wire range cage clamp terminals	2 x 0.25mm <sup>2</sup> - 1.5mm <sup>2</sup>
weight	0.21 kg
standards	EN ISO 13849-1EN 62061; EN 62061
suitable for safety functions	yes
with muting function	no
feedback circuit	yes
start contact	yes
stop category acc. to IEC 60204	0
rail mounting possible	yes

### connection data

detachable clamps	yes
type of electric connection	spring clamp connection

### safety parameters

category (ISO 13849-1)	4
PL (ISO 13849-1)	level e
SIL <sub>Cl</sub> (IEC 62061)	3
PFD <sub>d</sub> (Low demand mode)	6.9 E-6
PFH <sub>d</sub> (High demand mode)	1.6 E-9 1/h
HFT	1
SSF	99.5 %
DC	99 %
MTTF <sub>d</sub>	60 a
λS	1915 FIT
λD	1915 FIT
λDU	19 FIT
λDD	1896 FIT
T <sub>M</sub>	20 a
proof test intervall (High demand mode)	20 a

#### application

model	basic device
suitable for monitoring of magnetic switches	yes
suitable for monitoring of proximity switches	yes
suitable for monitoring of emergency-stop circuits	yes
suitable for monitoring of optoelectronic protection equipment	yes
suitable for monitoring of position switches	yes

#### output circuit

enabling paths	normally open contact
contact material	Ag alloy, gold-plated
rated switching voltage, enabling paths AC	230 V
rated switching voltage, enabling paths DC	24 V
max. thermal current I <sub>th</sub> , enabling paths	6 A
max. total current I <sup>2</sup> of all current path	9 A <sup>2</sup>
application category AC-15 (NO)	Ue 230V, Ie 3A
application category DC-13 (NO)	Ue 24V, Ie 2.5A
short-circuit protection (NO), max. fuse insert	6 A class gG fuse, fuse integral < 100 A <sup>2</sup> s
mechanical life	10 <sup>7</sup> switching cycles
outputs, safe, undelayed, with contact	3
outputs, safe, delayed, with contact	0

#### control circuit

nominal output voltage DC	22 V
input current (safety circuit / reset circuit)	40 mA
max. peak current (safety circuit / reset circuit)	100 mA
response time tA1	40 ms
response time tA2	600 ms
min. switch-on time	80 ms
recovery time tW	> 100 ms
release time tR	< 25 ms
synchronous time tS	200 ms
permissible test pulse time tTP	< 1 ms

max. resistivity, per channel	$\leq (5 + (1.176 \times UB / UN - 1) \times 100) \Omega$
type of switch function of the inputs	normally open contact
evaluation inputs	2-channel

#### supply circuit

nominal voltage UN	AC/DC 24 V
rated consumption AC	4.4 VA
rated consumption DC	2 W
rated frequency min.	50 Hz
rated frequency max.	60 Hz
operating voltage min.	20.4 V
operating voltage max.	26.4 V
electrical isolation supply circuit - control circuit	no
min. rated control supply voltage at AC 50 Hz	20.4 V
max. rated AC voltage for controls, 50 Hz	26.4 V
min. rated DC voltage for controls	20.4 V
max. rated DC voltage for controls	26.4 V
min. rated control supply voltage at DC	20.4 V
rated control supply voltage at AC 60HZ	20.4 V

#### dimensions

depth	114 mm
width	22.5 mm
height	106.5 mm

#### classification




ECLASS 11	
ECLASS 8.1	27371819
ETIM 9.0	EC001449
ETIM 8.0	EC001449
ETIM 7.0	EC001449
ETIM 6.0	EC001449
ETIM 5.0	EC001449
ETIM 4.0	EC001449
ETIM 3.0	EC001449

#### product compliance

REACH-SVHC conformity status	compliant
------------------------------	-----------

Teile Nr. / Part No.
R1.188.1940.0
R1.188.1950.0
R1.188.1960.0
R1.188.1970.0
R1.188.1980.0
R1.188.1990.0
R1.188.2000.0
R1.188.2010.0
R1.188.2020.0
R1.188.2390.0
R1.188.2410.0
R1.188.2420.0
R1.188.2430.0
R1.188.2440.0
R1.188.2450.0
R1.188.3400.0
R1.188.3410.0
R1.188.3420.0
R1.188.3430.0
R1.188.3490.0
R1.188.3600.0

Teile Nr. / Part No.
R1.188.3610.0
R1.188.3630.0
R1.188.3650.0
R1.188.3670.0
R1.188.3730.0
R1.188.3820.0
R1.188.3850.0
R1.188.3860.0
R1.188.3900.0
R1.188.3920.0
R1.188.3940.0
R1.188.4000.0
R1.188.4010.0
R1.188.4030.0
R1.188.4130.0
R1.188.4140.0
R1.188.4150.0
R1.188.4160.0
R1.188.4210.0
R1.188.5000.0

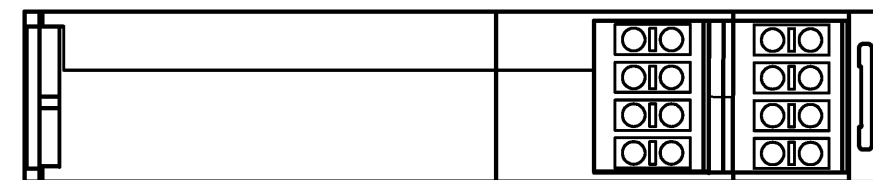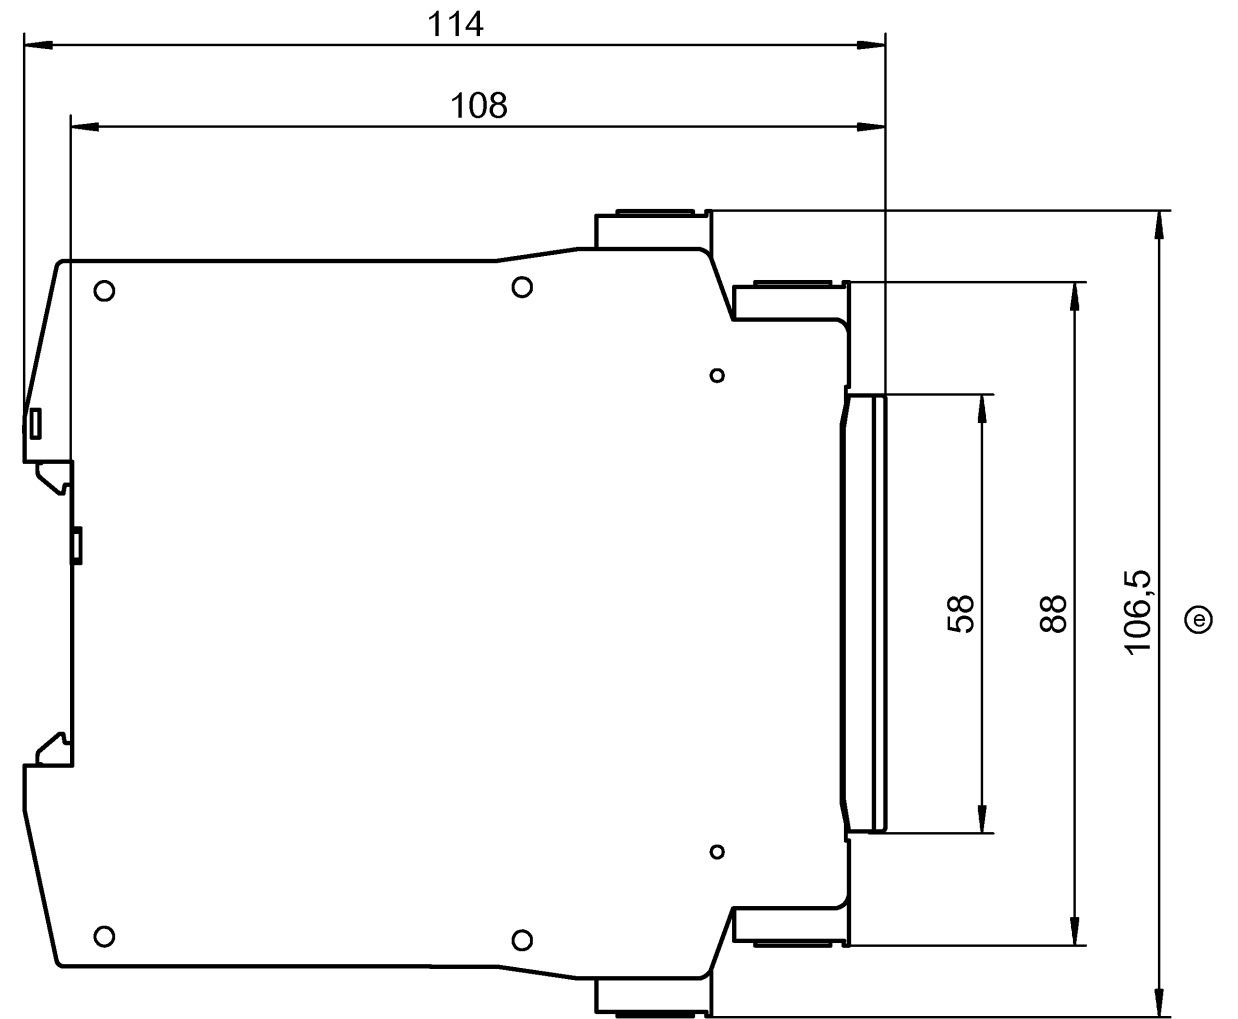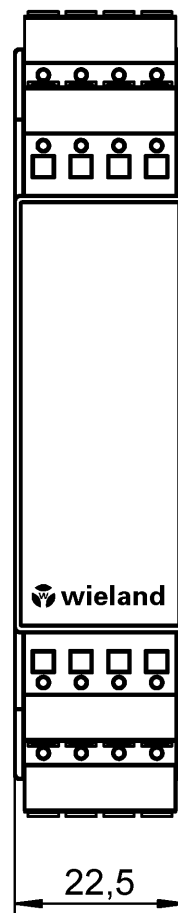

Weitere Angaben siehe KATALOG oder eKatalog.  
Additional data see CATALOG or eCatalog.

[www.wieland-electric.com](http://www.wieland-electric.com)  
[eshop.wieland-electric.com](http://eshop.wieland-electric.com)

ja/yes  Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.  
Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed		1. Verwendung: First Use:		Blatt: Sheet:	
		Werkstoff/Material		2014	Tag/Date	Name	
(f)	09.08.19	Maßstab/Scale		gezeichnet drawn	06.06.	Koetzner	
(e)	26.08.16			geprüft checked			
(d)	22.04.16			Normgepr. Stand. check			
(c)	03.07.15	Datei/File: 036141_F01K.DCD		Ersatz für/Replacement for:			
(b)	30.06.15	 www.wieland-electric.com		Type	Benennung/Title		
(a)	03.02.15			Maßbildzeichnung/Dimension drawing Standardgehäuse u. -deckel, Baubreite 22,5mm, Federkraftklemme steckbar Standard housing and cover, overall width 22,5mm plug-in spring-clamp terminal			
Index	Datum/Blatt Date/Sheet						
Änderung/Revision							

Zeichnung Nr./Drawing No.  
**T R1.188.1940.0 01K**

Maße in mm/Dimensions are in mm

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
M1  
M2  
M3  
L  
G  
i  
11.1  
12.1  
1.1