


## Data sheet

Commercial Art.No.: R1.544.1650.0

light curtain SLC-4TR40-1650

Safety-Lightcurtain Type 4, Transmitter, Resolution 40 mm, L = 1650 mm

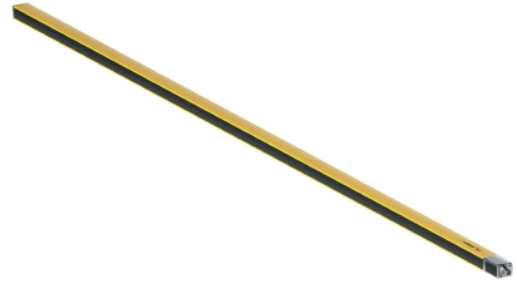

Commercial Art.No.	R1.544.1650.0
EAN	4049088202070
Order Unit	1

certificates / approvals



## Technical data

### function

sensor element	Transmitter
with muting function	no
with muting display	no
muting with	samosPRO COMPACT
with beam coding	no
automatic start	no
restart interlock	no
alignment aid	no
blinking	no
cascadable	no

### technical data

type acc. EN 61496-1	4
resolution	40 mm
protective field height	1650 mm
distance	0 - 20 m
connection	connector M12
nominal voltage	24 V
voltage type	DC
number of OSSD outputs	2
max. output current	380 mA
degree of protection (IP)	IP65
PFH <sub>d</sub> (High demand mode)	7.73 E-9 1/h
mission time TM	20 a

### safety parameters

category (ISO 13849-1)	4
PL (ISO 13849-1)	level e

SIL <sub>CL</sub> (IEC 62061)	3
PFH <sub>d</sub> (High demand mode)	7.73 E-9 1/h
HFT	1
T <sub>M</sub>	20 a

#### dimensions

width sensor	29 mm
height of sensor	35.4 mm
length of sensor	1716 mm

#### classification

ECLASS 11	
ECLASS 8.1	27270910
ETIM 9.0	EC002549
ETIM 8.0	EC002549
ETIM 7.0	EC002549
ETIM 6.0	EC002549
ETIM 5.0	EC002549
ETIM 4.0	EC002549
ETIM 3.0	EC002549

#### product compliance

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant

## Accessories

Commercial Art.No.:	Article-type description:	Description:
R1.594.1900.0	tilted mirror tie bar SLX-COLM-1900	Reflector column, persistant 1900 mm
R1.595.1650.0	tilted mirror SLX-MIR-1650	Reflector, length: 1710 mm
R1.596.1430.0	test bar SLX-ACC-TEST1430	Test bar, 14/30 mm
R1.596.2040.0	test bar SLX-ACC-TEST2040	Test bar, 20/40 mm
R1.500.0505.0	connection cable SLX-CAB-M12-0505	SLC M12, 5 pin Connection Cable (unshielded), 5m long
R1.500.0510.0	connection cable SLX-CAB-M12-0510	Connection cable M12, 5-pole, Length 10m, unshielded
R1.500.0515.0	connection cable SLX-CAB-M12-0515	Connection cable M12, 5-pole, Length 15m, unshielded
R1.500.0525.0	connection cable SLX-CAB-M12-0525	Connection cable M12, 5-pole, Length 25m, unshielded
R1.500.0550.0	connection cable SLX-CAB-M12-0550	Connection cable M12, 5-pole, Length 50m, unshielded
R1.600.0505.0	connection cable SLX-CAB-M12-S0505	Connection cable M12, 5-pole, Length 5m, shielded
R1.600.0510.0	connection cable SLX-CAB-M12-S0510	Connection cable M12, 5-pole, Length 10m, shielded
R1.600.0515.0	connection cable SLX-CAB-M12-S0515	Connection cable M12, 5-pole, Length 15m, shielded
R1.600.0525.0	connection cable SLX-CAB-M12-S0525	Connection cable M12, 5-pole, Length 25m, shielded
R1.600.0550.0	connection cable SLX-CAB-M12-S0550	Connection cable M12, 5-pole, Length 50m, shielded
R1.593.1900.0	device columns SLX-COL-1900	"Device column, profile heighth: 1880 mm; Total heighth: 1960 mm"
R1.591.0001.0	sliding block set SLX-MO-TNUTM6	Set Slot nut with M6-screw thread, 10 pcs.
R1.591.0005.0	Z-fixture SLX-MO-Z	Z-Bracket, 2 pcs.
R1.591.0007.0	rotary holding with shockabsorber SLX-MO-RO-S	Rotative bracket with Shockabsorber, 70mm lang, 2 pcs.
R1.591.0009.0	tool holder SLX-MO-CLIP	Clamp bracket, for Installation in Device column
R1.591.0010.0	set tool holder SLX-MO-CLIP2	Set Clamp bracket, for Installation in Device column

R1.591.0020.0	rotary holding 360° SLX-MO-RO2	Rotative bracket, 2 pcs., incl. 1 pcs. SLC-cylinder
---------------	--------------------------------	---

### Fits with

Commercial Art.No.:	Article-type description:	Description:
R1.554.1650.0	light curtain SLC-4ST40-1650	Safety-Lightcurtain Type 4, Receiver-Standard, Resolution 40 mm, L = 1650 mm
R1.574.1650.0	light curtain SLC-4PR40-1650	Safety-Lightcurtain Type 4, Receiver-Professional, Resolution 40 mm, L = 1650 mm

SLC 2 - Sender / transmitter

Schutzfeldhöhe / Protective field height (mm)	Länge / length (mm)	Auflösung / resolution 20 mm	Auflösung / resolution 30 mm	Auflösung / resolution 40 mm	Auflösung / resolution 90 mm
150	216	R1.512.0150.0	R1.513.0150.0	R1.514.0150.0	-
225	291	R1.512.0225.0	R1.513.0225.0	R1.514.0225.0	-
300	366	R1.512.0300.0	R1.513.0300.0	R1.514.0300.0	-
450	516	R1.512.0450.0	R1.513.0450.0	R1.514.0450.0	-
600	666	R1.512.0600.0	R1.513.0600.0	R1.514.0600.0	R1.515.0600.0
750	816	R1.512.0750.0	R1.513.0750.0	R1.514.0750.0	R1.515.0750.0
900	966	R1.512.0900.0	R1.513.0900.0	R1.514.0900.0	R1.515.0900.0
1050	1116	R1.512.1050.0	R1.513.1050.0	R1.514.1050.0	R1.515.1050.0
1200	1266	R1.512.1200.0	R1.513.1200.0	R1.514.1200.0	R1.515.1200.0
1350	1416	R1.512.1350.0	R1.513.1350.0	R1.514.1350.0	R1.515.1350.0
1500	1566	R1.512.1500.0	R1.513.1500.0	R1.514.1500.0	R1.515.1500.0
1650	1716	R1.512.1650.0	R1.513.1650.0	R1.514.1650.0	R1.515.1650.0
1800	1866	R1.512.1800.0	R1.513.1800.0	R1.514.1800.0	R1.515.1800.0

SLC 2 - Empfänger Standard / receiver standard

Schutzfeldhöhe / Protective field height (mm)	Länge / length (mm)	Auflösung / resolution 20 mm	Auflösung / resolution 30 mm	Auflösung / resolution 40 mm	Auflösung / resolution 90 mm
150	216	R1.522.0150.0	R1.523.0150.0	R1.524.0150.0	-
225	291	R1.522.0225.0	R1.523.0225.0	R1.524.0225.0	-
300	366	R1.522.0300.0	R1.523.0300.0	R1.524.0300.0	-
450	516	R1.522.0450.0	R1.523.0450.0	R1.524.0450.0	-
600	666	R1.522.0600.0	R1.523.0600.0	R1.524.0600.0	R1.525.0600.0
750	816	R1.522.0750.0	R1.523.0750.0	R1.524.0750.0	R1.525.0750.0
900	966	R1.522.0900.0	R1.523.0900.0	R1.524.0900.0	R1.525.0900.0
1050	1116	R1.522.1050.0	R1.523.1050.0	R1.524.1050.0	R1.525.1050.0
1200	1266	R1.522.1200.0	R1.523.1200.0	R1.524.1200.0	R1.525.1200.0
1350	1416	R1.522.1350.0	R1.523.1350.0	R1.524.1350.0	R1.525.1350.0
1500	1566	R1.522.1500.0	R1.523.1500.0	R1.524.1500.0	R1.525.1500.0
1650	1716	R1.522.1650.0	R1.523.1650.0	R1.524.1650.0	R1.525.1650.0
1800	1866	R1.522.1800.0	R1.523.1800.0	R1.524.1800.0	R1.525.1800.0

SLC 2 - Empfänger Select / receiver select

Schutzfeldhöhe / Protective field height (mm)	Länge / length (mm)	Auflösung / resolution 20 mm	Auflösung / resolution 30 mm	Auflösung / resolution 40 mm	Auflösung / resolution 90 mm
150	216	R1.532.0150.0	R1.533.0150.0	R1.534.0150.0	-
225	291	R1.532.0225.0	R1.533.0225.0	R1.534.0225.0	-
300	366	R1.532.0300.0	R1.533.0300.0	R1.534.0300.0	-
450	516	R1.532.0450.0	R1.533.0450.0	R1.534.0450.0	-
600	666	R1.532.0600.0	R1.533.0600.0	R1.534.0600.0	R1.535.0600.0
750	816	R1.532.0750.0	R1.533.0750.0	R1.534.0750.0	R1.535.0750.0
900	966	R1.532.0900.0	R1.533.0900.0	R1.534.0900.0	R1.535.0900.0
1050	1116	R1.532.1050.0	R1.533.1050.0	R1.534.1050.0	R1.535.1050.0
1200	1266	R1.532.1200.0	R1.533.1200.0	R1.534.1200.0	R1.535.1200.0
1350	1416	R1.532.1350.0	R1.533.1350.0	R1.534.1350.0	R1.535.1350.0
1500	1566	R1.532.1500.0	R1.533.1500.0	R1.534.1500.0	R1.535.1500.0
1650	1716	R1.532.1650.0	R1.533.1650.0	R1.534.1650.0	R1.535.1650.0
1800	1866	R1.532.1800.0	R1.533.1800.0	R1.534.1800.0	R1.535.1800.0

SLC 4 - Sender / transmitter

Schutzfeldhöhe / Protective field height (mm)	Länge / length (mm)	Auflösung / resolution 14 mm	Auflösung / resolution 20 mm	Auflösung / resolution 30 mm	Auflösung / resolution 40 mm	Auflösung / resolution 90 mm
150	216	R1.541.0150.0	R1.542.0150.0	R1.543.0150.0	R1.544.0150.0	-
225	291	-	R1.542.0225.0	R1.543.0225.0	R1.544.0225.0	-
300	366	R1.541.0300.0	R1.542.0300.0	R1.543.0300.0	R1.544.0300.0	-
450	516	R1.541.0450.0	R1.542.0450.0	R1.543.0450.0	R1.544.0450.0	-
600	666	R1.541.0600.0	R1.542.0600.0	R1.543.0600.0	R1.544.0600.0	R1.545.0600.0
750	816	R1.541.0750.0	R1.542.0750.0	R1.543.0750.0	R1.544.0750.0	R1.545.0750.0
900	966	R1.541.0900.0	R1.542.0900.0	R1.543.0900.0	R1.544.0900.0	R1.545.0900.0
1050	1116	R1.541.1050.0	R1.542.1050.0	R1.543.1050.0	R1.544.1050.0	R1.545.1050.0
1200	1266	R1.541.1200.0	R1.542.1200.0	R1.543.1200.0	R1.544.1200.0	R1.545.1200.0
1350	1416	R1.541.1350.0	R1.542.1350.0	R1.543.1350.0	R1.544.1350.0	R1.545.1350.0
1500	1566	R1.541.1500.0	R1.542.1500.0	R1.543.1500.0	R1.544.1500.0	R1.545.1500.0
1650	1716	R1.541.1650.0	R1.542.1650.0	R1.543.1650.0	R1.544.1650.0	R1.545.1650.0
1800	1866	R1.541.1800.0	R1.542.1800.0	R1.543.1800.0	R1.544.1800.0	R1.545.1800.0


SLC 4 - Empfänger Standard / receiver standard

Schutzfeldhöhe / Protective field height (mm)	Länge / length (mm)	Auflösung / resolution 14 mm	Auflösung / resolution 20 mm	Auflösung / resolution 30 mm	Auflösung / resolution 40 mm	Auflösung / resolution 90 mm
150	216	R1.551.0150.0	R1.552.0150.0	R1.553.0150.0	R1.554.0150.0	-
225	291	-	R1.552.0225.0	R1.553.0225.0	R1.554.0225.0	-
300	366	R1.551.0300.0	R1.552.0300.0	R1.553.0300.0	R1.554.0300.0	-
450	516	R1.551.0450.0	R1.552.0450.0	R1.553.0450.0	R1.554.0450.0	-
600	666	R1.551.0600.0	R1.552.0600.0	R1.553.0600.0	R1.554.0600.0	R1.555.0600.0
750	816	R1.551.0750.0	R1.552.0750.0	R1.553.0750.0	R1.554.0750.0	R1.555.0750.0
900	966	R1.551.0900.0	R1.552.0900.0	R1.553.0900.0	R1.554.0900.0	R1.555.0900.0
1050	1116	R1.551.1050.0	R1.552.1050.0	R1.553.1050.0	R1.554.1050.0	R1.555.1050.0
1200	1266	R1.551.1200.0	R1.552.1200.0	R1.553.1200.0	R1.554.1200.0	R1.555.1200.0
1350	1416	R1.551.1350.0	R1.552.1350.0	R1.553.1350.0	R1.554.1350.0	R1.555.1350.0
1500	1566	R1.551.1500.0	R1.552.1500.0	R1.553.1500.0	R1.554.1500.0	R1.555.1500.0
1650	1716	R1.551.1650.0	R1.552.1650.0	R1.553.1650.0	R1.554.1650.0	R1.555.1650.0
1800	1866	R1.551.1800.0	R1.552.1800.0	R1.553.1800.0	R1.554.1800.0	R1.555.1800.0

SLC 4 - Empfänger Select / receiver select

Schutzfeldhöhe / Protective field height (mm)	Länge / length (mm)	Auflösung / resolution 14 mm	Auflösung / resolution 20 mm	Auflösung / resolution 30 mm	Auflösung / resolution 40 mm	Auflösung / resolution 90 mm
150	216	R1.561.0150.0	R1.562.0150.0	R1.563.0150.0	R1.564.0150.0	-
225	291	-	R1.562.0225.0	R1.563.0225.0	R1.564.0225.0	-
300	366	R1.561.0300.0	R1.562.0300.0	R1.563.0300.0	R1.564.0300.0	-
450	516	R1.561.0450.0	R1.562.0450.0	R1.563.0450.0	R1.564.0450.0	-
600	666	R1.561.0600.0	R1.562.0600.0	R1.563.0600.0	R1.564.0600.0	R1.565.0600.0
750	816	R1.561.0750.0	R1.562.0750.0	R1.563.0750.0	R1.564.0750.0	R1.565.0750.0
900	966	R1.561.0900.0	R1.562.0900.0	R1.563.0900.0	R1.564.0900.0	R1.565.0900.0
1050	1116	R1.561.1050.0	R1.562.1050.0	R1.563.1050.0	R1.564.1050.0	R1.565.1050.0
1200	1266	R1.561.1200.0	R1.562.1200.0	R1.563.1200.0	R1.564.1200.0	R1.565.1200.0
1350	1416	R1.561.1350.0	R1.562.1350.0	R1.563.1350.0	R1.564.1350.0	R1.565.1350.0
1500	1566	R1.561.1500.0	R1.562.1500.0	R1.563.1500.0	R1.564.1500.0	R1.565.1500.0
1650	1716	R1.561.1650.0	R1.562.1650.0	R1.563.1650.0	R1.564.1650.0	R1.565.1650.0
1800	1866	R1.561.1800.0	R1.562.1800.0	R1.563.1800.0	R1.564.1800.0	R1.565.1800.0

Qu - PEE 12/92

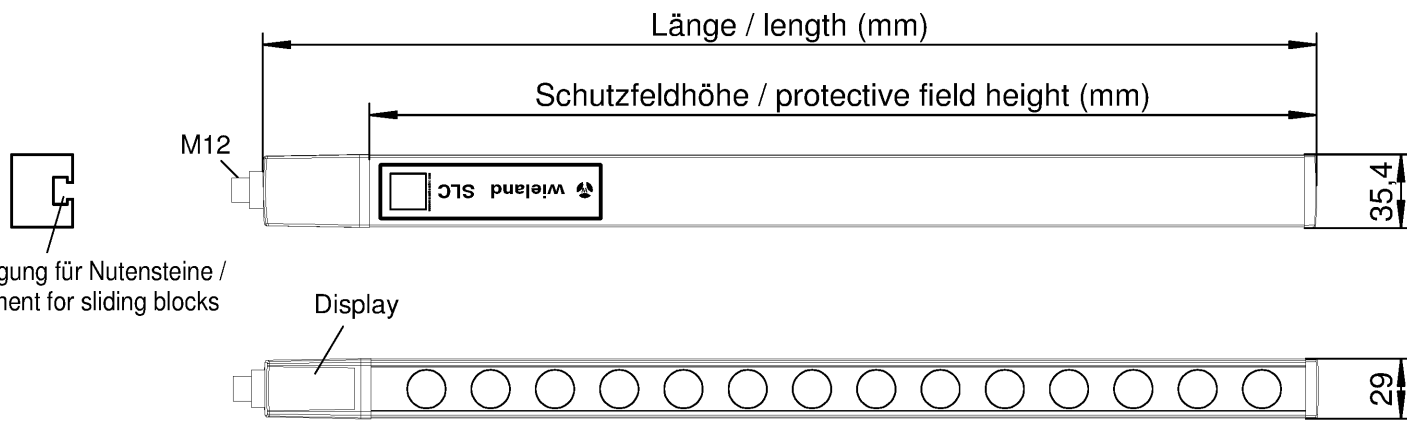

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog.		www.wieland-electric.com eshop.wieland-electric.com	
ja/yes <input checked="" type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!			
Freitoleranz nach General tolerance	CAD-Zeichnung, keine manuellen Änderungen CAD drawing, no manual modifications allowed	1. Verwendung: First Use:	Blatt: Sheet:
	Werkstoff / Material	2015 gezeichnet drawn 30.04. geprüft checked Normgepr. Stand. check	Name Kötzner
	Maßstab/Scale	Zeichnung Nr. / Drawing No. <b>T R1.512.0150.0 01K</b>	
	Maße in mm / Dimensions are in mm		
	Datei / File: 40631__01K.DCD	Ersatz für / Replacement for:	
	<b>wieland</b> www.wieland-electric.com	Type	Benennung / Title Teilespezifikation / Component specification <b>Lichtvorhang SLC / light curtain SLC</b>
Index	Datum / Blatt Date / Sheet		
Änderung / Revision			

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Die Reproduktion, Distribution und Nutzung dieses Dokuments sowie die Kommunikation der Inhalte mit anderen ohne schriftliche Genehmigung ist untersagt.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
M1  
M2  
M3  
L  
G  
i  
11.1  
12.1  
1.1