


KZL

Strain relief plates for mounting rails

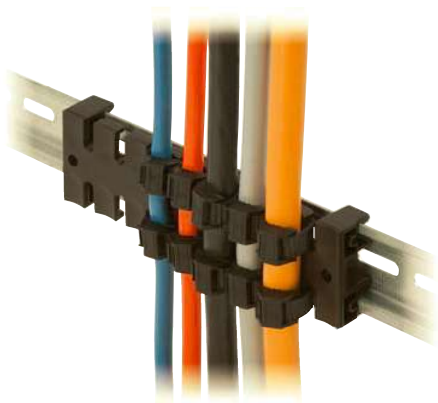

| Type | Order No. for H-rails | Order No. for C-rails | Length L1 | Length L2 | No. of teeth | PU |
|------|-----------------------|-----------------------|-----------|-----------|--------------|----|
|------|-----------------------|-----------------------|-----------|-----------|--------------|----|

| | | | | | | |
|---------|-------|-------|----------|----------|---|----|
| KZL 11 | 32250 | | 11.5 mm | - | 1 | 10 |
| KZL 39 | 32260 | 32261 | 38.5 mm | 28.3 mm | 3 | 10 |
| KZL 80 | 32262 | 32263 | 79.5 mm | 68 mm | 6 | 10 |
| KZL 140 | 32264 | 32265 | 139.5 mm | 128.1 mm | 9 | 10 |

Product description

The strain relief plate KZL is used for static or dynamic applications for organising and securing cables on machines, control panels or drag chains.

The undercut on the comb shaped profile provides secure strain relief according to EN 50262 / 62444. Fixation of the cables is achieved by using cable ties.

KZL Strain relief plates are available for 30 mm DIN rails shape C or 35 mm DIN rails shape H.

3

Advantages

- Simple assembly
- Cost-effective
- High packing density
- Universal usage

Specifications

Material: Polyamide (PA)
 Flame class: UL94-Vo, self-extinguishing
 Temperature: -40°C to +140°C (static)
 Properties: Halogen free, silicone free

Accessories

KB Cable ties 159

