


SK

EMC Shield brackets



Dimensions SK bracket (without mounting foot):

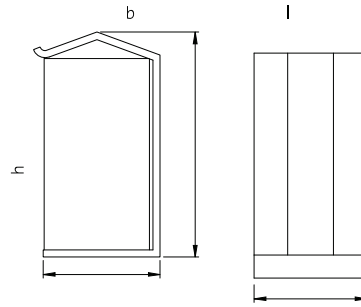

Product description

SK shield brackets can be used where the shield of single cables has to be earthed.

SK shield brackets can be assembled on a mounting plate with screws, with SC-feet in DIN-rails shape C or with SF-feet on 35 mm DIN-rails shape H.

Advantages

4

- Simple assembly on TS35 DIN rails and 10 × 3 mm bus bars
- Various sizes and possibilities for mounting



SC foot single for C-rail (PU: 10) Order No. 36220

Specifications

Material

SK-bracket Sheet steel, galvanically zinc plated
 SF-foot Spring steel

Accessories

Bus bar 10 × 3 93
 Stripping tool 113

Description	Type	Order No.	Shield diameter	Dimensions l × b × h [mm]	PU
For direct mounting (M4-screw included):					
	SK 3-8	36222	3 - 8 mm	18 × 14 × 26	10
	SK 4-13.5	36224	4 - 13.5 mm	20 × 20 × 31	10
	SK 10-20	36226	10 - 20 mm	26 × 24 × 40	10
	SK 15-32	36228	15 - 32 mm	32 × 35 × 64	10
For 35 mm DIN-rail shape H:					
	SF SK 3-8	36500	3 - 8 mm	18 × 14 × 26	10
	SF SK 4-13.5	36502	4 - 13.5 mm	20 × 20 × 31	10
	SF SK 10-20	36504	10 - 20 mm	26 × 24 × 40	10
	SF SK 15-32	36506	15 - 32 mm	32 × 35 × 64	10
For 10 × 3 mm bus bar:					
	SS SK 3-8	36235	3 - 8 mm	18 × 14 × 26	10
	SS SK 4-13.5	36236	4 - 13.5 mm	20 × 20 × 31	10
	SS SK 10-20	36237	10 - 20 mm	26 × 24 × 40	10
	SS SK 15-32	36238	15 - 32 mm	32 × 36 × 64	10
For 35 mm DIN-rail shape C:					
	SC SK 3-8	36696	3 - 8 mm	18 × 14 × 26	10
	SC SK 4-13.5	36700	4 - 13.5 mm	20 × 20 × 31	10
	SC SK 10-20	36704	10 - 20 mm	26 × 24 × 40	10
	SC SK 15-32	36708	15 - 32 mm	32 × 36 × 64	10