

Data sheet

Commercial Art.No.: R1.648.3200.0

light grid SLD-4UP3-2-00

Multibeam-Safety-Lightgrid Type 4, Universal-Professional, 3 Beams, Muting lamp



Commercial Art.No.	R1.648.3200.0
EAN	4049088398766
Order Unit	1

certificates / approvals



Technical data

function

sensor element	Transmitter and receiver
with muting function	yes
with muting display	yes
with beam coding	no
automatic start	no
restart interlock	yes
alignment aid	no
blanking	no
cascadable	no

technical data

type acc. EN 61496-1	4
protective field height	800 mm
connection	connector M12
nominal voltage	24 V
voltage type	DC
number of OSSD outputs	2
max. output current	380 mA
degree of protection (IP)	IP67
PFH _d (High demand mode)	6.6 E-9 1/h
mission time TM	20 a

safety parameters

category (ISO 13849-1)	4
PL (ISO 13849-1)	level e
SIL _{CL} (IEC 62061)	3
PFH _d (High demand mode)	6.6 E-9 1/h

HFT	1
T _M	20 a

dimensions

width sensor	52 mm
height of sensor	64.7 mm
length of sensor	900 mm

classification

ECLASS 11	
ECLASS 8.1	27270910
ETIM 9.0	EC001832
ETIM 8.0	EC001832
ETIM 7.0	EC002549
ETIM 6.0	EC002549
ETIM 5.0	EC002549
ETIM 4.0	EC002549
ETIM 3.0	EC002549

product compliance

ROHS conformity status	compliant/exempted
ROHS exceptions	III-6(a); III-6(b)
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Lead
REACH-SVHC CAS numbers	7439-92-1

Accessories

Commercial Art.No.:	Article-type description:	Description:
R1.600.0505.0	connection cable SLX-CAB-M12-S0505	Connection cable M12, 5-pole, Length 5m, shielded
R1.600.0510.0	connection cable SLX-CAB-M12-S0510	Connection cable M12, 5-pole, Length 10m, shielded
R1.600.0515.0	connection cable SLX-CAB-M12-S0515	Connection cable M12, 5-pole, Length 15m, shielded
R1.600.0525.0	connection cable SLX-CAB-M12-S0525	Connection cable M12, 5-pole, Length 25m, shielded
R1.600.0550.0	connection cable SLX-CAB-M12-S0550	Connection cable M12, 5-pole, Length 50m, shielded
R1.593.1000.0	device columns SLX-COL-1000	"Device column, profile height: 980 mm; Total height: 1060 mm"
R1.591.0001.0	sliding block set SLX-MO-TNUTM6	Set Slot nut with M6-screw thread, 10 pcs.
R1.591.0005.0	Z-fixture SLX-MO-Z	Z-Bracket, 2 pcs.
R1.591.0007.0	rotary holding with shockabsorber SLX-MO-RO-S	Rotative bracket with Shockabsorber, 70mm lang, 2 pcs.
R1.591.0009.0	tool holder SLX-MO-CLIP	Clamp bracket, for Installation in Device column
R1.591.0010.0	set tool holder SLX-MO-CLIP2	Set Clamp bracket, for Installation in Device column
R1.591.0011.0	rotary holding 360° SLX-MO-RO-SET1	Set with SLX-MO-RO-B + SLX-MO-RO-C + screws
R1.591.0012.0	rotary holding 360° SLX-MO-RO-SET2	Set with 2 x SLX-MO-RO-C + screws
R1.591.0013.0	rotary holding with shockabsorber SLX-MO-RO-SET1-S	Set with SLX-MO-RO-B, SLX-MO-RO-C + screws + Shockabsorber
R1.591.0014.0	rotary holding with shockabsorber SLX-MO-RO-SET2-S	Set with 2 x SLX-MO-RO-C + screws + Shockabsorber
R1.597.0017.0	sensor connector box SLX-MUT-BOX2	sensor connection box for 2 muting sensors

Fits with

Commercial Art.No.:	Article-type description:	Description:
R1.606.3006.0	light grid SLD-MIR3-0-06	Multibeam-Safety-Lightgrid, Mirror, 3 Beams, Distance 6 m
R1.606.3008.0	light grid SLD-MIR3-0-08	Multibeam-Safety-Lightgrid, Mirror, 3 Beams, Distance 8 m

SLD - Sender /
transmitter

Teilenummer / Part No.	Laenge / length (mm)
R1.641.2050.0	600
R1.641.2070.0	600
R1.641.2150.0	600
R1.641.2170.0	600
R1.641.3050.0	900
R1.641.3070.0	900
R1.641.3150.0	900
R1.641.3170.0	900
R1.641.4050.0	1000
R1.641.4070.0	1000
R1.641.4150.0	1000
R1.641.4170.0	1000

SLD - Empfaenger Standard /
receiver standard

Teilenummer / Part No.	Laenge / length (mm)
R1.642.1050.0	193
R1.642.1070.0	193
R1.642.1150.0	193
R1.642.2050.0	600
R1.642.2070.0	600
R1.642.2150.0	600
R1.642.2170.0	600
R1.642.3050.0	900
R1.642.3070.0	900
R1.642.3150.0	900
R1.642.3170.0	900
R1.642.4050.0	1000
R1.642.4070.0	1000
R1.642.4150.0	1000
R1.642.4170.0	1000

SLD - Empfaenger Select /
receiver select

Teilenummer / Part No.	Laenge / length (mm)
R1.643.1050.0	193
R1.643.1070.0	193
R1.643.1150.0	193
R1.643.2050.0	600
R1.643.2070.0	600
R1.643.2150.0	600
R1.643.2170.0	600
R1.643.3050.0	900
R1.643.3070.0	900
R1.643.3150.0	900
R1.643.3170.0	900
R1.643.4050.0	1000
R1.643.4070.0	1000
R1.643.4150.0	1000
R1.643.4170.0	1000

SLD - Sender Professional /
transmitter professional

Teilenummer / Part No.	Laenge / length (mm)
R1.641.1050.0	193
R1.641.1070.0	193
R1.641.1150.0	193

SLD - Empfaenger Professional /
receiver professional

Teilenummer / Part No.	Laenge / length (mm)
R1.647.1050.0	193
R1.647.1070.0	193
R1.647.1150.0	193
R1.647.2050.0	600
R1.647.2070.0	600
R1.647.2150.0	600
R1.647.2170.0	600
R1.647.2250.0	600
R1.647.2350.0	600
R1.647.3050.0	900
R1.647.3070.0	900
R1.647.3150.0	900

Teilenummer / Part No.	Laenge / length (mm)
R1.647.3170.0	900
R1.647.3250.0	900
R1.647.3350.0	900
R1.647.4050.0	1000
R1.647.4070.0	1000
R1.647.4150.0	1000
R1.647.4170.0	1000
R1.647.4250.0	1000
R1.647.4350.0	1000

SLD - Universal Standard

Teilenummer / Part No.	Laenge / length (mm)
R1.644.2000.0	600
R1.644.3000.0	900

Umlenkspiegel /
deflection mirror

Teilenummer / Part No.	Laenge / length (mm)
R1.606.2008.0	594
R1.606.3006.0	894
R1.606.3008.0	894


SLD - Universal Select

Teilenummer / Part No.	Laenge / length (mm)
R1.645.2000.0	600
R1.645.3000.0	900


SLD - Universal Professional

Teilenummer / Part No.	Laenge / length (mm)
R1.648.2000.0	600
R1.648.2200.0	600
R1.648.3000.0	900
R1.648.3200.0	900

Ausfuehrung gezeichnet als 2-strahliger Sender, Empfaenger /
drawn version as 2-beams transmitter, receiver

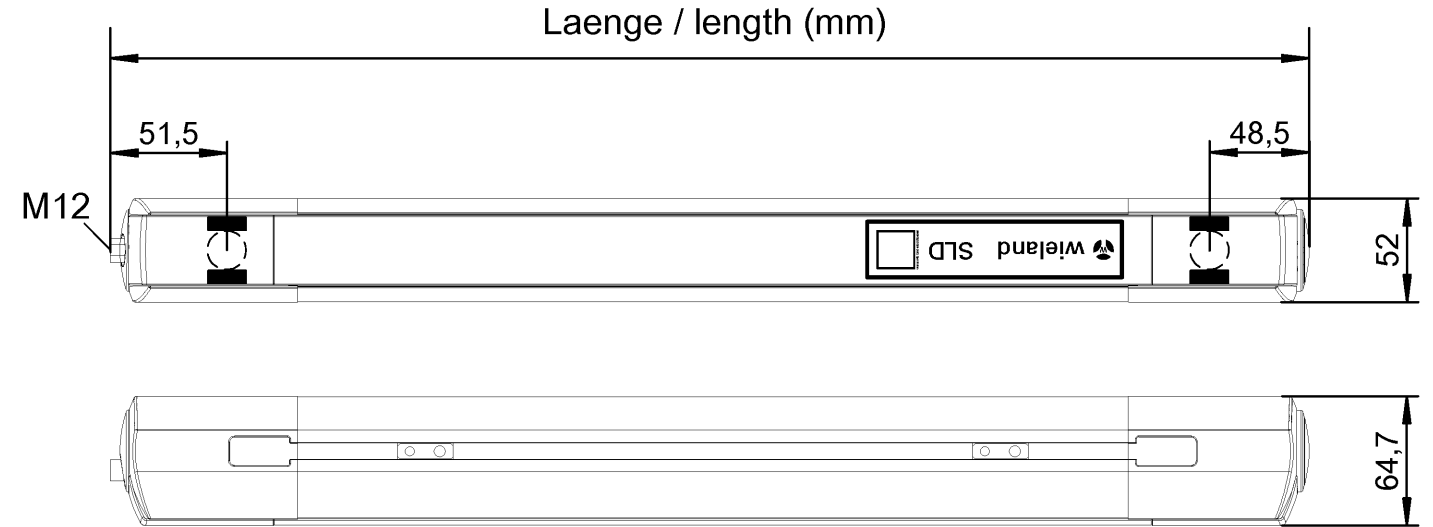

Ausfuehrung gezeichnet als 2-strahliger Umlenkspiegel /
drawn version as 2-beams deflection mirror

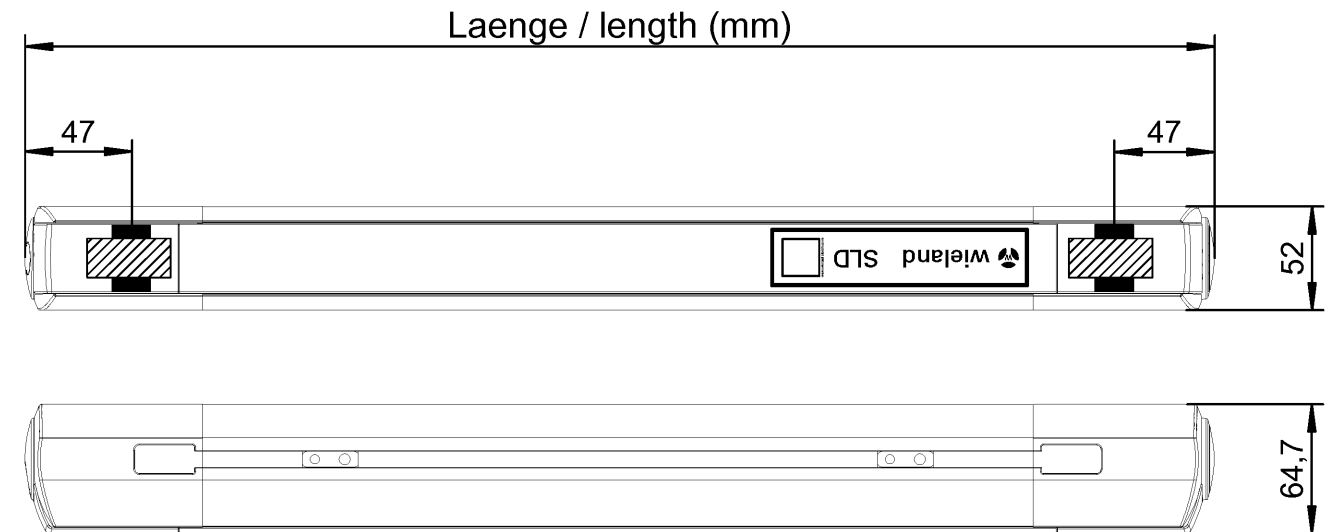

Weitere Angaben siehe KATALOG oder eKatalog.
Additional data see CATALOG or eCatalog.

www.wieland-electric.com
eshop.wieland-electric.com

ja/yes ☒ Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten.
Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!

Freitoleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD drawing, no manual modifications allowed		1. Verwendung: First Use:	Blatt: Sheet:
		Werkstoff / Material	2015	Tag/Date	Name
			gezeichnet drawn	04.05.	Koetzner
		Maßstab/Scale	geprüft checked		
			Normgepr. Stand. check		
©	05.10.18	Datei / File: 40641_C01K.DCD		Ersatz für / Replacement for:	
ⓑ	13.03.17	 wieland www.wieland-electric.com		Type	Benennung / Title
Ⓐ	20.07.15				Teilespezifikation / Component specification
Index	Datum / Blatt Date / Sheet			Lichtgitter SLD / light grid SLD	
Änderung / Revision					

Zeichnung Nr. / Drawing No.
T R1.606.2008.0 01K

Maße in mm / Dimensions are in mm