

ÖLFLEX® SERVO FD 798 CP

Screened encoder cable with PUR outer sheath for highly dynamic power chain application - certified

ÖLFLEX® SERVO FD 798 CP - Screened encoder cable for high dynamic power chain application in harsh conditions with UL/CSA AWM certification

Info

Extended Line Performance - Long travel lengths or high acceleration
Fits to various encoder systems
AWM certification for USA and Canada



Halogen-free



Mechanical resistance



Oil-resistant



Power chain



Interference signals



UV-resistant

Benefits

Allows much faster speed and accelerations which increases the economic efficiency of the machines

Suitable for use with encoders & resolvers from leading manufacturers

Thin, optimised for weight and volume

Increased durability under harsh conditions thanks to robust PUR outer sheath

Resistant to contact with many mineral oil-based lubricants, diluted acids, aqueous alkaline solutions and other chemical media

Last Update (04.11.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ÖLFLEX® SERVO FD 798 CP

Wide temperature range for applications in harsh climatic environments

Application range

Connecting cable between servo controller and encoder/resolver
Connecting cable between servo controller and speed generators
In power chains or moving machine parts
Particularly in wet areas of machine tools and transfer lines
Assembly lines, production lines, in all kinds of machines
For indoor and outdoor use

Product features

Flammability:
UL/CSA: VW-1, FT1
IEC/EN: 60332-1-2
Halogen-free materials
Low-capacitance design
Abrasion and notch-resistant
Oil-resistant

Norm references / Approvals

UL AWM Style 20236
CSA AWM IA/B; IIA/B FT 1
UL File No. E63634
For use in power chains: Please comply with assembly guideline Appendix T3

Product Make-up

Fine-wire or extra-fine wire, tinned-copper conductor
Core insulation: polypropylene (PP)
Cores (or core pairs) twisted in layers or bundles
Refer to data sheet for more details
Non-woven wrapping
PUR outer sheath, green (RAL 6018)

Technical Data

| | |
|--|---|
| Classification ETIM 5: | ETIM 5.0 Class-ID: EC000104 ETIM 5.0 Class-Description: Control cable |
| Classification ETIM 6: | ETIM 6.0 Class-ID: EC000104 ETIM 6.0 Class-Description: Control cable |
| Core identification code: | Details see datasheet ÖLFLEX® SERVO FD 798 CP |
| Conductor stranding: | Fine wire or extra-fine wire |
| Minimum bending radius: | Flexing: up from 7.5 x outer diameter Fixed installation: 4 x outer diameter |
| Nominal voltage: | IEC: 30 V UL & CSA: 30 V |
| Test voltage: | Core/core: 1500 V rms Core/screen: 750 V rms |
| Bending cycles & operation parameters: | See Selection Table A2-1 in the appendix of our online catalogue |
| Temperature range: | Flexing: -40 °C to +90 °C (UL/CSA: +80 °C) Fixed installation: -50 °C to +90 °C |

Last Update (04.11.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ÖLFLEX® SERVO FD 798 CP

(UL/CSA: +80°C)

Note

Unless specified otherwise, the shown product values are nominal values at room temperature. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths

Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum

Please specify the preferred type of packaging (e.g. 1 x 500 m drum or 5 x 100 m coils).

DESINA - Decentralized and standardized installation technology for machine tools and manufacturing systems

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

ÖLFLEX® SERVO FD 798 CP

| Article number | Number of cores and mm ² per conductor | Outer diameter [mm] | Copper index (kg/km) | Weight (kg/km) |
|-------------------------|---|---------------------|----------------------|----------------|
| ÖLFLEX® SERVO FD 798 CP | | | | |
| 0036910 | (4x2x0,34+4x0,5) | 8.9 | 79 | 125 |
| 0036949 | (3x(2x0,14)+(2x(0,5))) | 9.6 | 70 | 120 |
| 0036912 | (3x(2x0,14)+4x0,14+2x0,5) | 8.8 | 68 | 110 |
| 0036913 | (3x(2x0,14)+4x0,14+2x0,5+4x0,22) | 9.4 | 80 | 130 |
| 0036942 | (2x2x0,18) | 5.0 | 24 | 47 |
| 0036924 | (4x2x0,18) | 6.4 | 30 | 52 |
| 0036923 | (8x2x0,18) | 7.8 | 51 | 85 |
| 0036926 | (12x0,22) | 7.1 | 44 | 73 |
| 0036915 | (4x2x0,25+2x1,0) | 8.8 | 63 | 109 |
| 0036927 | (4x2x0,25+2x0,5) | 8.5 | 62 | 98 |
| 0036943 | (4x1+4x2x0,14+(4x0,14)) | 9.7 | 103 | 175 |
| 0036944 | (3x(2x0,25)+3x0,25+2x1,0)) | 9.3 | 96 | 162 |
| 0036929 | (2x(2x0,25)+2x0,5) | 8.7 | 46 | 98 |
| 0036930 | (2x2x0,25+2x0,5) | 7.3 | 38 | 72 |
| 0036914 | (9x0,5) | 8.8 | 71 | 110 |
| 0036946 | 3x(2x0,14)+(2x0,5) | 10.0 | 68 | 142 |
| 0036941 | 3x(2x0,14)+(3x0,14) | 9.2 | 57 | 125 |
| 0036945 | 4x(2x0,14)+2x(1) | 11.4 | 92 | 115 |
| 0036916 | (6x2x0,25+2x0,5) | 10.3 | 67 | 121 |
| 0036917 | (10x0,14+2x0,5) | 7.7 | 41 | 82 |
| 0036918 | (10x0,14+4x0,5) | 8.1 | 54 | 98 |
| 0036928 | (2x2x0,14+2x(2x0,14)+4x0,5+(4x0,14)) | 9.1 | 79 | 135 |
| 0036921 | (4x2x0,25) | 7.6 | 38 | 75 |
| 0036947 | (5x2x0,25) | 9.0 | 50 | 126 |
| 0036940 | (6x2x0,25) | 9.3 | 71 | 143 |
| 0036948 | (5x2x22AWG) | 8.7 | 75 | 109 |
| 0036920 | (4x2x0,14+4x0,5) | 8.2 | 51 | 95 |
| 0036911 | (3x(2x0,14)+2x(0,5)) | 9.6 | 70 | 120 |
| 0036931 | (3x(2x0,14)+2x(1)) | 9.1 | 74 | 137 |
| 0036932 | (4x2x0,14+4x0,50+(4x0,14)) | 8.3 | 88 | 134 |
| 0036933 | (3x2x0,25+2x0,5) | 8.4 | 50 | 86 |
| 0036934 | (5x2x0,25+2x0,5) | 9.5 | 69 | 113 |
| 0036935 | (3x2x24AWG) | 6.5 | 36 | 70 |

Last Update (04.11.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03_16

ÖLFLEX® SERVO FD 798 CP

| Article number | Number of cores and mm ² per conductor | Outer diameter [mm] | Copper index (kg/km) | Weight (kg/km) |
|----------------|---|---------------------|----------------------|----------------|
| 0036936 | (5x2x0,14+2x0,5) | 7.8 | 51 | 101 |
| 0036937 | (2x2x0,18+5x0,5) | 7.6 | 62 | 110 |
| 0036938 | (5x2x0,18+6x0,5) | 8.7 | 79.2 | 113 |
| 0036939 | (10x2x28AWG) | 6.2 | 41 | 70 |

Last Update (04.11.2024)





©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03_16

ÖLFLEX® SERVO FD 798 CP

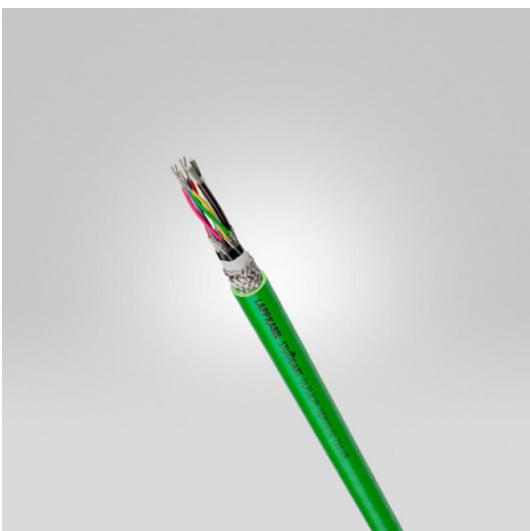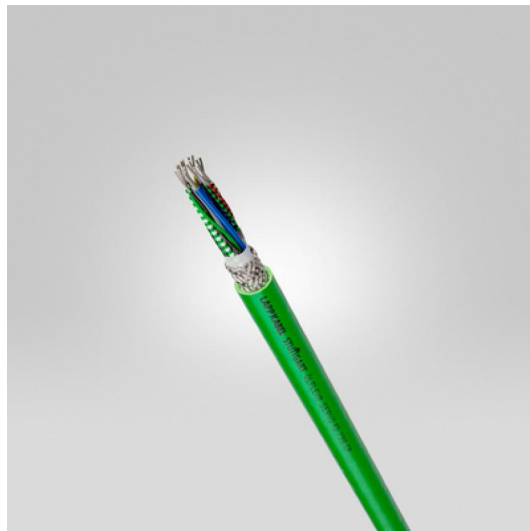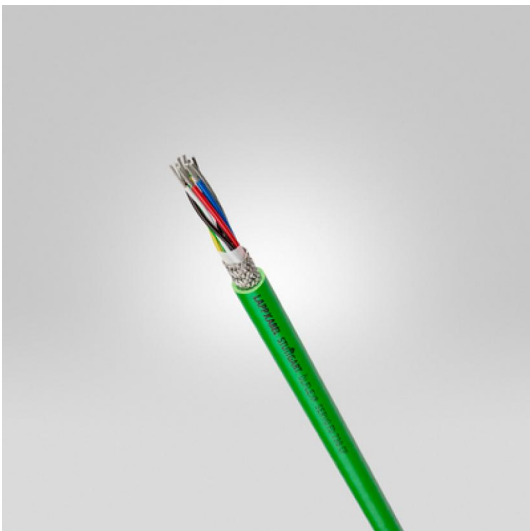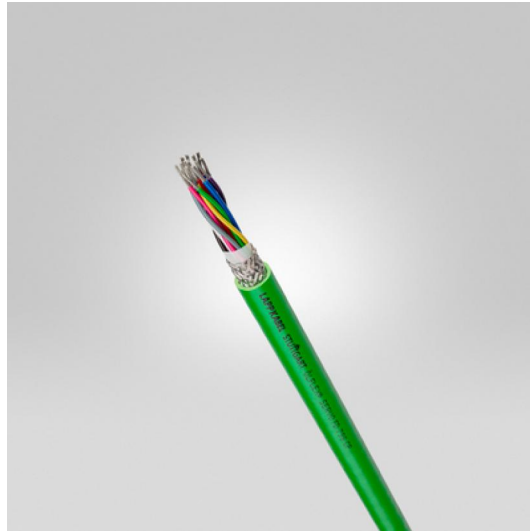

Last Update (04.11.2024)

©2024 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

ÖLFLEX® SERVO FD 798 CP

