


EPIC® H-B 10 SDR-LB

Housing design H-B. The industry standard.

The robust universal low housing has a cable entry and a single lever and is ideal for use in the plastics industry.

Info

Single Lever version for quick locking and simple unlocking with lifting aid Metal lid with sturdy hinge Protection rating UL50E tested

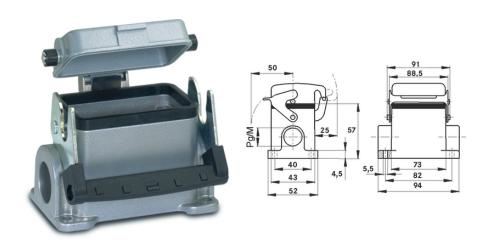





Supplementary automation components from Lapp



Mechanical and plant engineering



Mechanical resistance



Robust



Waterproof

Benefits

The smallest housing with single and double lever. The right housing is available for every application

Application range

Plant engineering Light & sound technology Plastics industry

Product features

Last Update (29.10.2024)
©2024 Lapp Group - Technical changes reserved
Product Management www.lappkabel.de
You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16



EPIC® H-B 10 SDR-LB

Surface-mount base, low version Single lever 1 cable entry Metal cover

Technical Data

Classification ETIM 5: ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Classification ETIM 6: ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

Material: Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating: IP 65 (latched)

NEMA 250, UL50E: 12 (latched)

VDE-tested: Certified production control: VDE-REG. no.: B437

UL-tested:

UL File Number: E75770

Temperature range: -40°C to +100°C, short-term up to +125°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.



EPIC® H-B 10 SDR-LB

М PG Packaging unit Article number Article description H-B housing: surface-mount base (cover, 1 cable entry, single lever) H-B 10 SDR-LB 16 10 10036900 16 19036900 H-B 10 SDR-LB M20 20 10 25 H-B 10 SDR-LB M25 10 79064600