


## EPIC® H-B 48 TG

Housing design H-B for 2 inserts.

The robust large housing for two inserts in one connector ensures that the power and data are in a single component. It is suitable, for example, for use in the plastics industry.

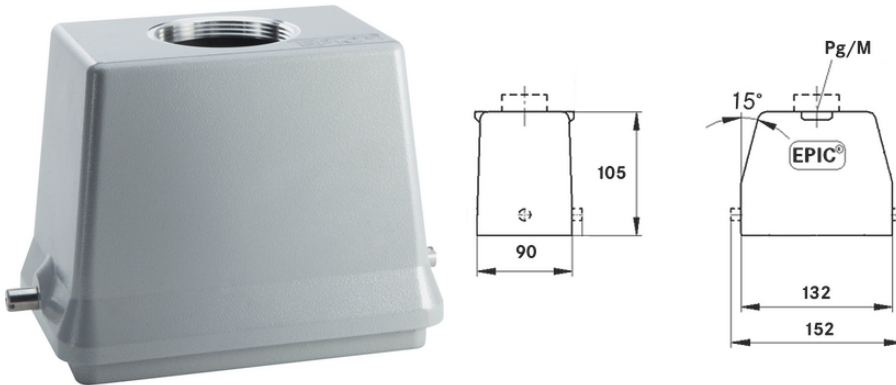

### Benefits

The large, robust housing for two inserts in one connector. Power and data in a single connector

### Application range

Plant engineering  
Plastics industry

### Product features

Hood  
Bolts for single lever  
Straight cable entry  
Versions with / without neck

### Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000437 ETIM 5.0 Class-Description: Housing for industrial connectors
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000437 ETIM 6.0 Class-Description: Housing for industrial connectors
Material:	Housing: aluminium alloy, grey Lever: zinc-plated steel Sealing: NBR
Protection rating:	IP 65 (latched)
Temperature range:	-40°C to +100°C, short-term up to +125°C

### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Last Update (24.10.2024)

©2024 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

**EPIC® H-B 48 TG**

Prices are net prices without VAT and surcharges. Sale to business customers only.

**EPIC® H-B 48 TG**

Article number	Article description	M	PG	Neck	Packaging unit
H-B housing: hood (straight cable entry, bolts for single lever)					
10155000	H-B 48 TG 29	-	29	yes	1
10156000	H-B 48 TG 36	-	36	yes	1
10156200	H-B 48 TG 36	-	36	-	1
10157000	H-B 48 TG 42	-	42	yes	1
19155000	H-B 48 TG M32	32	-	-	1
19156000	H-B 48 TG M40	40	-	-	1
19157000	H-B 48 TG M50	50	-	-	1

Last Update (24.10.2024)

©2024 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)You can find the current technical data in the corresponding data sheet.  
PN 0456 / 02\_03.16