


Data sheet

Commercial Art.No.: 57.504.6255.0

distribution terminal WK / 4-8S / U/V0

Distribution terminal block with push on connection for mounting on TS 35 and TS 32, width 6 mm, color grey,

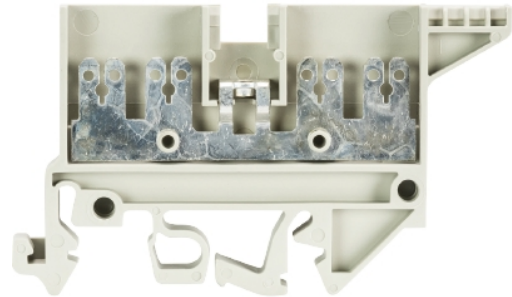

Commercial Art.No.	57.504.6255.0
EAN	4015573605220
Order Unit	100

certificates / approvals



Technical data

general

color	grey
number of levels	1
number of clamp positions per level	4
width/grid dimension	6 mm
insulating housing	PA666
flammability class of insulation material acc. with UL94	V0
explosion-tested version "Ex e"	no
mounting method	DIN rail (top hat rail)/G-rail
terminal blocks for electrical installations	yes

technical data

rated current	20 A
rated voltage	800 V
rated impulse voltage	8 kV
pollution degree	3
closing plate required	yes
type of insulation material	thermoplastic
length	67.3 mm

connection data

connection type 1	flat connection
-------------------	-----------------

connection type 2	flat connection
-------------------	-----------------

technical data UL/CSA

voltage UL	300 V
current factory wiring	10 A
current field wiring	10 A
cross section CSA	22-12 AWG
voltage CSA	300 V
current CSA	10 A

classification

ECLASS 11	
ECLASS 8.1	27141120
ETIM 9.0	EC000897
ETIM 8.0	EC000897
ETIM 7.0	EC000897
ETIM 6.0	EC000897
ETIM 5.0	EC000897
ETIM 4.0	EC000897
ETIM 3.0	EC000897

product compliance

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant

Accessories

Commercial Art.No.:	Article-type description:	Description:
07.311.4255.0	end plate AP 4 S/V0	End plate for DIN rail terminal blocks type WK / 4-8S..., color: grey
98.300.1000.0	mounting rail TS 35x7,5 PERF 15mm - l:2000mm	Mounting rail TS 35, slotted, size 7,5 mm, length 2 m, material steel. galv. zinc-plated and passivated