




EPIC® H-B 6 TBF-LB

Housing design H-B. The industry standard.



EPIC® H-B 6 TBFH-LB

Housing design H-B. The industry standard.

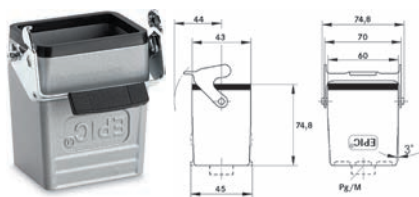

Info

- More interior space for wiring

Benefits

- The smallest housing out of the H-B series. For inserts with high electrical properties

Application range

- Plant engineering
- Control engineering
- Plastics industry

Product features

EPIC® H-B 6 TBF-LB

- Cable coupler hood, low version
- Single lever
- Straight cable entry
- Versions with / without neck

EPIC® H-B 6 TBFH-LB

- Cable coupler hood, high version
- Single lever
- Straight cable entry
- Versions with / without neck

Suitable inserts

- Refer to Selection Table A10 to select the required inserts and housings

Technical data

ETIM ETIM 5.0 Class-ID: EC000437
ETIM 5.0 Class-Description: Housing for industrial connectors

Material
Housing: powder-coated aluminium alloy, grey
Lever: zinc-plated steel
Sealing: NBR

IP **Protection rating**
IP 65 (latched)

DIN VDE Certified production control: VDE-REG. no.: B437
UL-tested:
UL File Number: E75770

Temperature range
-40°C to +100°C,
short-term up to +125°C

Article number	Article description	M	PG	Neck	Pieces / PU
H-B housing: cable coupler hood (1 straight cable entry, single lever)					
10014000	H-B 6 TBF 13,5		13.5	yes	10
10024000	H-B 6 TBF 16		16	yes	10
19014000	H-B 6 TBF M20	20			10
19024000	H-B 6 TBF M25	25			10
H-B housing: cable coupler hood (1 straight cable entry, single lever, high version)					
70010200	H-B 6 TBFH 21		21	yes	10
70010400	H-B 6 TBFH 29		29	yes	10
79010200	H-B 6 TBFH M25	25			10

Photographs are not to scale and do not represent detailed images of the respective products.

Accessories

- SKINTOP® MS-M
- SKINTOP® for industrial connectors
- Easy to install