



**i Info**


- Single Lever version for quick locking and simple unlocking with lifting aid

**i Info**


- Metal lid with sturdy hinge
- Single Lever version for quick locking and simple unlocking with lifting aid

**i Info**


- Double lever version with 2 levers for increased safety

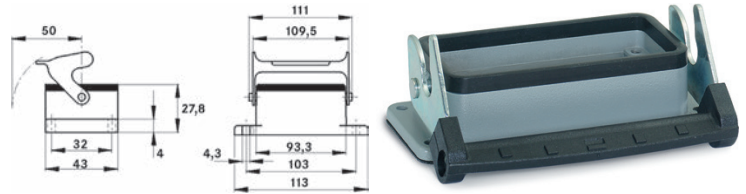

**EPIC® H-B 16 AD-LB**  
Housing design H-B. The industry standard.

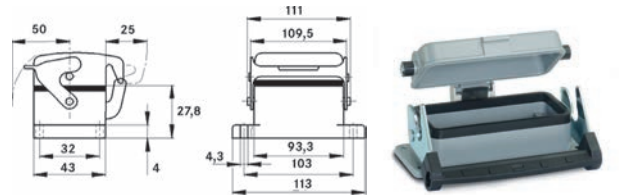

**EPIC® H-B 16 AG**  
Housing design H-B. The industry standard.

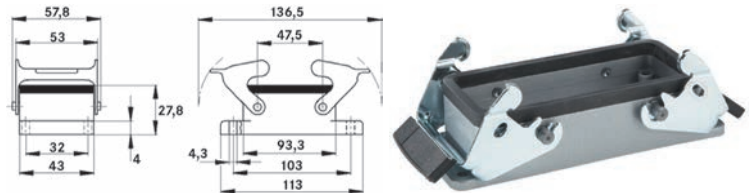

**Benefits**

- The housing standard. Wide choice for all applications

**Application range**

- Plant engineering
- Light & sound technology
- Plastics industry

**Product features**

- EPIC® H-B 16 AG-LB**
- Panel-mount base
  - Single lever
  - Included: flat gasket

**EPIC® H-B 16 AD-LB**

- Panel-mount base
- Single lever
- Metal cover
- Included: flat gasket

**EPIC® H-B 16 AG**

- Panel-mount base
- Dual levers
- Included: flat gasket

**Suitable inserts**

- Refer to Selection Table A 10 to select the required inserts and housings

**Technical data**

**ETIM** ETIM 5.0 Class-ID: EC000437  
ETIM 5.0 Class-Description: Housing for industrial connectors

**Material**  
Housing: powder-coated aluminium alloy, grey  
Lever: zinc-plated steel  
Sealing: NBR

**IP** **Protection rating**  
IP 65 (latched)

**DIN VDE** Certified production control:  
VDE-REG. no.: B437  
UL-tested:  
UL File Number: E75770

**Temperature range**  
-40°C to +100°C,  
short-term up to +125°C

Article number	Article description	Pieces / PU
<b>H-B housing: panel-mount base (single lever)</b>		
10072900	H-B 16 AG-LB	5
<b>H-B housing: panel-mount base (cover, single lever)</b>		
10073900	H-B 16 AD-LB	5
<b>H-B housing: panel-mount base (double lever)</b>		
10072000	H-B 16 AG	5

Photographs are not to scale and do not represent detailed images of the respective products.