

MGate™ MB3180/3280/3480

1, 2, and 4-port standard serial-to-Ethernet Modbus gateways



- > Convert between Modbus TCP and Modbus RTU/ASCII
- > 1 Ethernet port and 1, 2, or 4 RS-232/422/485 ports
- > 16 simultaneous TCP masters with up to 32 simultaneous requests per master
- > Easy hardware setup and configuration



Overview

The MB3180, MB3280, and MB3480 are standard Modbus gateways that convert between Modbus TCP and Modbus RTU/ASCII protocols. Up to 16 simultaneous Modbus TCP masters are supported, with up to

32 RTU/ASCII slaves per serial port. For RTU/ASCII masters, up to 32 TCP slaves are supported.

Standard Modbus Network Integration

The three standard MGate™ models (MB3180, MB3280, and MB3480) are designed for easy integration of Modbus TCP and RTU/ASCII networks. With these models, Modbus serial slave devices can be seamlessly incorporated into an existing Modbus TCP network, and

Modbus TCP slaves can be made accessible to serial masters. The MB3180, MB3280, and MB3480 offer features that make network integration easy, customizable, and compatible with almost any Modbus network.

High Density, Cost-effective Gateways

The MGate™ MB3000 gateways can effectively connect a high density of Modbus nodes to the same network. The MB3280 can manage up to 62 serial slave nodes, and the MB3480 can manage up to 124

serial slave nodes. Each RS-232/422/485 serial port can be configured individually for Modbus RTU or Modbus ASCII operation and for different baudrates, allowing both types of networks to be integrated with Modbus TCP through one Modbus gateway.

Specifications

Ethernet Interface

Protocols: Modbus TCP

Number of Ports: 1

Speed: 10/100 Mbps, Auto MDI/MDIX

Connector: 8-pin RJ45

Magnetic Isolation Protection: 1.5 kV (built-in)

Serial Interface

Protocol: Modbus RTU/ASCII Slave/Master

Number of Ports:

MB3180: 1

MB3280: 2

MB3480: 4

Serial Standards: RS-232/422/485, software selectable

Connectors: DB9 male

ESD Protection: 15 kV for all signals

RS-485 Data Direction Control: ADDC® (automatic data direction control)

Serial Communication Parameters

Data Bits: 7, 8

Stop Bits: 1, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, DTR/DSR, RTS Toggle (RS-232 only)

Baudrate: 50 bps to 921.6 kbps

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

RS-422: Tx+, Tx-, Rx+, Rx-, GND

RS-485-4w: Tx+, Tx-, Rx+, Rx-, GND

RS-485-2w: Data+, Data-, GND

Software

Configuration Options: Web Console, Serial Console, Telnet Console, Windows Utility

Utility: MGate Manager for Windows 2000, Windows XP, Server 2003, Vista, Server 2008 (x86/x64), Windows Server 2008 R2, Windows 7/8/8.1 (x86/x64), Windows Server 2012 (x64), Windows 2012 R2

Multi-master and Multi-drop:

Master mode: 32 TCP slaves

Slave mode: 16 TCP masters (request queue 32-deep for each master)

Support: Smart Routing, MXview, SNMP v1 (read only)

Physical Characteristics

Housing: Metal, IP30

Weight:

MGate MB3180: 340 g (0.75 lb)

MGate MB3280: 360 g (0.79 lb)

MGate MB3480: 740 g (1.63 lb)

Dimensions:

Without ears:

MB3180: 22 x 52 x 80 mm (0.87 x 2.05 x 3.15 in)

MB3280: 22 x 77 x 111 mm (0.87 x 3.03 x 4.37 in)

MB3480: 35.5 x 102.7 x 157.2 mm (1.40 x 4.04 x 6.19 in)

With ears:

- MB3180: 22 x 75 x 80 mm (0.87 x 2.95 x 3.15 in)
- MB3280: 22 x 100 x 111 mm (0.87 x 3.94 x 4.37 in)
- MB3480: 35.5 x 102.7 x 181.3 mm (1.40 x 4.04 x 7.14 in)

Environmental Limits

- Operating Temperature:** 0 to 60°C (32 to 140°F)
- Storage Temperature:** -40 to 85°C (-40 to 185°F)
- Ambient Relative Humidity:** 5 to 95% (non-condensing)

Power Requirements

- Input Voltage:** 12 to 48 VDC
- Input Current:**
- MGate M3180: 200 mA @ 12 VDC
- MGate M3280: 250 mA @ 12 VDC
- MGate M3480: 385 mA @ 12 VDC

Power Connector:

- MGate MB3180: Power jack
- MGate MB3280/3480: Power jack and terminal block

Standards and Certifications

Safety: UL 60950-1, EN 60950-1

EMC: EN 55032/24

EMI: CISPR 32, FCC Part 15B Class A

EMS:

- IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV
- IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m
- IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV
- IEC 61000-4-5 Surge: Power: 1 kV (MB3180/MB3280)
- IEC 61000-4-5 Surge: Power: 1 kV; Signal: 2 kV (MB3480)
- IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m
- IEC 61000-4-8 PFMF
- IEC 61000-4-11

MTBF (mean time between failures)

- Time:**
- MGate M3180: 628,376 hrs
- MGate M3280: 503,029 hrs
- MGate M3480: 295,812 hrs

Standard: Telcordia SR332


Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

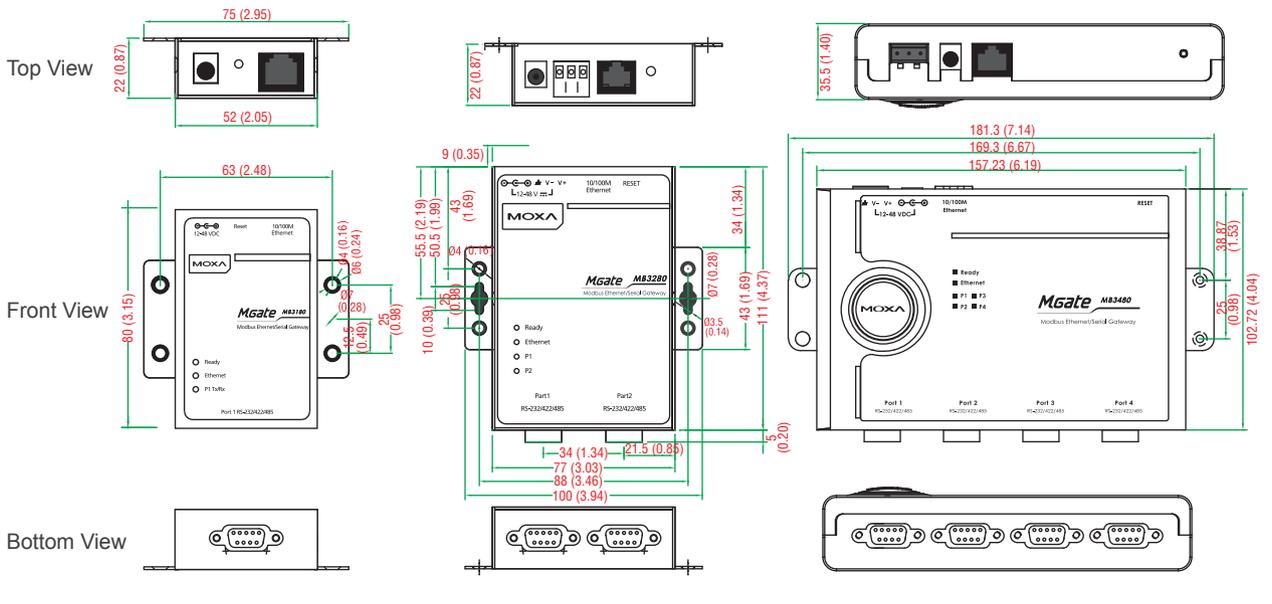

Ordering Information

Available Models

- MGate MB3180:** 1-port standard Modbus gateway
- MGate MB3280:** 2-port standard Modbus gateway
- MGate MB3480:** 4-port standard Modbus gateway

Optional Accessories (can be purchased separately)

- CBL-RJ458P-100:** 8-pin RJ45 CAT5 Ethernet cable, 100 cm
- CBL-F9M9-150:** DB9 female to DB9 male serial cable, 150 cm
- CBL-F9M9-20:** DB9 female to DB9 male serial cable, 20 cm
- CBL-RJ45SF9-150:** RJ45 to DB9 female shielded serial cable, 150 cm
- ADP-RJ458P-DB9F:** DB9 female to RJ45 connector
- A-ADP-RJ458P-DB9F-ABC01:** DB9 female to RJ45 connector
- Mini DB9F-to-TB:** DB9 female to terminal block connector
- DK35A:** DIN-rail mounting clips, 35 mm, 2 DIN-rail plates with 4 screws

Package Checklist

- 1 MGate MB3180 or MB3280 or MB3480 Modbus gateway*
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card

*The package includes one power adapter suitable for your region.

DK35A

