


CEE Wall mounted plugs

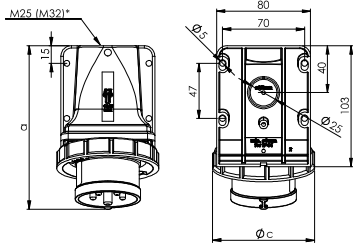

angle=15°


Wall mounted plug IP67

Poles	16 Amp			32 Amp	
	3	4	5	4	5
a [mm]	136	138	140	150	152
Height [mm]	99	94	100	104	102
c [mm]	71	79	87	93	102
M* [mm]	25	25	25	25	25
Wire flexible [mm ²]	1-2,5			2,5-6	
Wire solid [mm ²]	1-4			2,5-10	
Contact screws [Ncm]	100			110	
Weight [g]	200	223	242	260	306

- with screw terminals
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a „v“ e.g. 5152-6kv
- top or rear entry
- incl. threaded bung

IP67 watertight

*M32 optional on request available

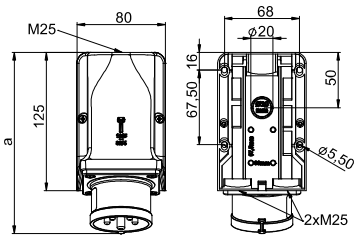


angle=15°

Wall mounted plug IP44

Poles	16 Amp			32 Amp		
	3	4	5	3	4	5
a [mm]	163	163	164	173	173	174
Height [mm]	109	109	112	115	115	118
M [mm]	3x25	3x25	3x25	3x25	3x25	3x25
Wire flexible [mm ²]	1-2,5			2,5-6		
Wire solid [mm ²]	1-4			2,5-10		
Contact screws [Ncm]	100			110		
Weight [g]	263	278	295	302	322	341

- with screw terminals
- for wiring through
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 9515-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

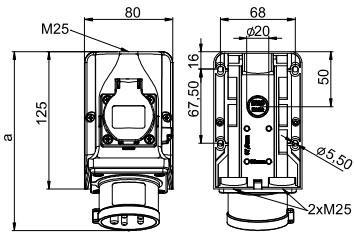


angle=15°

Wall mounted plug - COMBO IP44

Poles	16 Amp			32 Amp	
	3	4	5	3	5
a [mm]	162	162	163	172	173
Height [mm]	117	117	117	117	118
M [mm]	3x25	3x25	3x25	3x25	3x25
Wire flexible [mm ²]	1-2,5			2,5-6	
Wire solid [mm ²]	1-4			2,5-10	
Contact screws CEE [Ncm]	100			110	
Screw terminals [Ncm]	120				
Weight [g]	367	382	399	422	463

- with screw terminals
- wall mounted plug with integrated safety socket acc. Austr./Germ. system
- connecting terminals up to 10mm²
- **ready wired**
- for plug 32A the safety socket is protected by fuse (10A slow)
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 95215-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet
- special design with Belg./French socket outlet or non wired version are available on request

IP44 splashproof

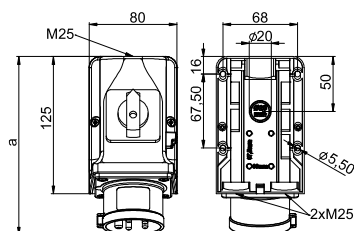

angle=15°

Wall mounted plug with switch IP44

Poles	16 Amp	32 Amp
	5	5
a [mm]	163	173
Height [mm]	128	128
M [mm]	3x25	3x25
Wire flexible [mm ²]	1-2,5	2,5-6
Wire solid [mm ²]	1-4	2,5-10
Weight [g]	474	522

- with screw terminals
- wall mounting plug with integrated ON/OFF switch AC22A
- **prewired**
- housing material: PA6
- contacts: brass
 - to order nickel-plated contacts please add a "v" e.g. 75615-6v
- top, 2x bottom or rear entry
- incl. threaded cable grommet

IP44 splashproof

