


# CEE Plugs

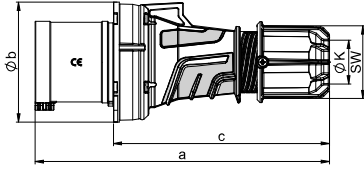


## Plug IP44 POWER TWIST

	63 Amp		
	3	4	5
<b>Poles</b>	3	4	5
<b>a</b> [mm]	250	250	250
<b>b</b> [mm]	102	102	102
<b>c</b> [mm]	184	184	184
<b>K_cable Ø</b> [mm]	14,5-36	14,5-36	14,5-36
<b>Wire flexible</b> [mm <sup>2</sup> ]	6-16		
<b>Contact screws</b> [Ncm]	200		
<b>SW</b> [mm]	61	61	61
<b>Weight</b> [g]	534	576	625

- contact frame with screws
- housing material: PA6
- contacts: nickel-plated contacts with pilot contact (see page 8)

**IP44** splashproof

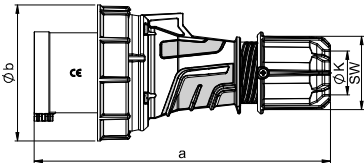


## Plug IP66/67 POWER TWIST

	63 Amp		
	3	4	5
<b>Poles</b>	3	4	5
<b>a</b> [mm]	250	250	250
<b>b</b> [mm]	115	115	115
<b>K_cable Ø</b> [mm]	14,5-36	14,5-36	14,5-36
<b>Wire flexible</b> [mm <sup>2</sup> ]	6-16		
<b>Contact screws</b> [Ncm]	200		
<b>SW</b> [mm]	61	61	61
<b>Weight</b> [g]	574	621	670

- contact frame with screws
- housing material: PA6
- contacts: nickel-plated contacts with pilot contact (see page 8)

**IP66/67** watertight

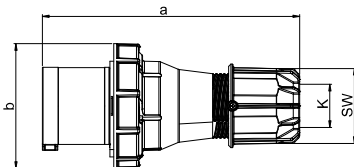

## Plug IP66/67 POWER TWIST

	125 Amp		
	3	4	5
<b>Poles</b>	3	4	5
<b>a</b> [mm]	270	270	270
<b>b</b> [mm]	131	131	131
<b>K_cable Ø</b> [mm]	22,5-50	22,5-50	22,5-50
<b>Wire flexible</b> [mm <sup>2</sup> ]	16-50		
<b>Contact screws</b> [Ncm]	450		
<b>SW</b> [mm]	81	81	81
<b>Weight</b> [g]	956	1064	1169

- contact frame with hexagon socket screws
- housing material: PA6
- contacts: nickel-plated contacts with pilot contact (see page 8)

**IP66/67** watertight

**POWER  
TWIST**



- ✓ Safety
- ✓ High impact resistance
- ✓ Optimum grip
- ✓ Large connection area
- ✓ Time saving

Amp.	Poles	pack. unit	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
			50/60Hz <b>4h</b>	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz <b>7h</b>	100-300Hz <b>10h</b>	301-500Hz <b>2h</b>
			Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
<b>63</b>	<b>3</b>	2	0331-4	<b>0331-6</b>	0331-9	0331-7	0331-10	0331-2
<b>63</b>	<b>4</b>	2	0341-4	0341-9	<b>0341-6</b>	0341-7	0341-10	0341-2
<b>63</b>	<b>5</b>	2	0351-4	0351-9	<b>0351-6</b>	0351-7	0351-10	0351-2



0351-6

<b>63</b>	<b>3</b>	2	033-4	<b>033-6</b>	033-9	033-7	033-10	033-2
<b>63</b>	<b>4</b>	2	034-4	034-9	<b>034-6</b>	034-7	034-10	034-2
<b>63</b>	<b>5</b>	2	035-4	035-9	<b>035-6</b>	035-7	035-10	035-2



035-6

<b>125</b>	<b>3</b>	2	043-4	<b>043-6</b>	043-9	043-7	043-10	043-2
<b>125</b>	<b>4</b>	2	044-4	044-9	<b>044-6</b>	044-7	044-10	044-2
<b>125</b>	<b>5</b>	2	045-4	045-9	<b>045-6</b>	045-7	045-10	045-2



045-6

## Time saving:

- Simple and fast insertion of the cable
- Strain-relief and sealing of the cable by tightening the cable gland
- All current cables for 63A from ø14,5mm to ø36mm for 125A from ø22,5mm to ø50mm
- 100% tightness of the cable

