




SKINTOP® CLICK BS

**Info**

- The most innovative cable insertion system in the market for a fast and highly flexible assembly. Simply click in - turn to the left - turn to the right - finished. The result: fixed, centred, strain-relieved fitting and maximum protection class in a few seconds.

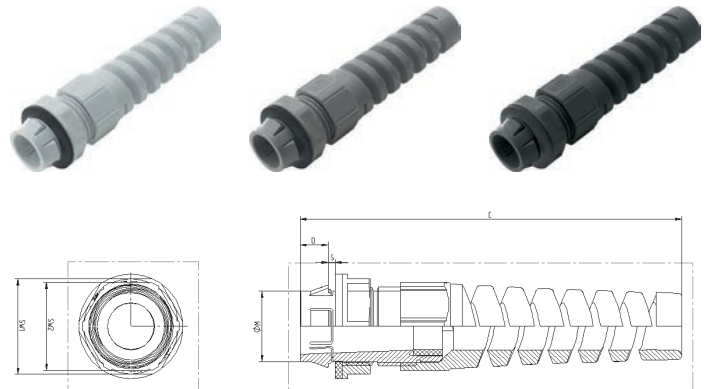

**Benefits**

- Reliable bending protection for cable conservation and functional reliability
- Save up to 70% of the time with the innovative CLICK system
- No thread required
- To protect flexible cables
- Fewer parts, counter nut no longer needed

**Application range**

- Cables for electrical appliances and machinery that are moved under normal use must be protected against excessive bending as required in accordance with VDE 0700-1
- Robotics industry
- Moving machine parts
- Apparatus construction
- Light and sound applications

**Norm references / Approvals**

- UL File Nr. E79903

**Included**

- Included: disassembly tool

**Technical data**

**Classification ETIM 5/6**  
 ETIM 5.0/6.0 Class-ID: EC000441  
 ETIM 5.0/6.0 Class-Description: Cable screw gland

**Colour delivered**  
 Silver grey (RAL 7001)  
 Light grey (RAL 7035)  
 Black (RAL 9005), UV-resistant

**Material**  
 Body: special polyamide  
 Seal: special elastomer

**Protection rating**  
 IP 68 - 4 bar (M12)  
 IP 68 - 5 bar (M16 - M25)  
 IP 68 - 1 bar (M32)

**Temperature range**  
 -20°C to +100°C

Article number	Article designation / size	Clamping range ØF (mm)	M (hole in mm)	SW1/SW2 mm	Overall length, C (mm)	Thread length, D (mm)	Wall thickness, S (mm)	Pieces / PU
<b>SKINTOP® CLICK BS light grey</b>								
53112932	CLICK BS 12	4,5-7	12.3 (-0.2)	18.0 / 15.0	74.0	8	1.0 - 4.0	50
53112888	CLICK BS 16	5-9	16.3 (-0.2)	22.0 / 19.0	94.0	8	1.0 - 4.0	50
53112889	CLICK BS 20	7-13	20.3 (-0.2)	27.0 / 25.0	108.0	8	1.0 - 4.0	25
53112890	CLICK BS 25	9-17	25.3 (-0.2)	32.0 / 30.0	127.0	8	1.0 - 4.0	25
53112933	CLICK BS 32	11-21	32.3 (-0.2)	40.0 / 36.0	155.0	8	1.0 - 4.0	25
<b>SKINTOP® CLICK BS silver grey</b>								
53112934	CLICK BS 12	4,5-7	12.3 (-0.2)	18.0 / 15.0	74.0	8	1.0 - 4.0	50
53112906	CLICK BS 16	5-9	16.3 (-0.2)	22.0 / 25.0	94.0	8	1.0 - 4.0	50
53112907	CLICK BS 20	7-13	20.3 (-0.2)	27.0 / 25.0	108.0	8	1.0 - 4.0	25
53112908	CLICK BS 25	9-17	25.3 (-0.2)	32.0 / 30.0	127.0	8	1.0 - 4.0	25
53112935	CLICK BS 32	11-21	32.3 (-0.2)	40.0 / 36.0	155.0	8	1.0 - 4.0	25
<b>SKINTOP® CLICK BS black</b>								
53112936	CLICK BS 12	4,5-7	12.3 (-0.2)	18.0 / 15.0	74.0	8	1.0 - 4.0	50
53112909	CLICK BS 16	5-9	16.3 (-0.2)	22.0 / 19.0	94.0	8	1.0 - 4.0	50
53112911	CLICK BS 20	7-13	20.3 (-0.2)	27.0 / 25.0	108.0	8	1.0 - 4.0	25
53112912	CLICK BS 25	9-17	25.3 (-0.2)	32.0 / 30.0	127.0	8	1.0 - 4.0	25
53112937	CLICK BS 32	11-21	32.3 (-0.2)	40.0 / 36.0	155.0	8	1.0 - 4.0	25

Photographs and graphics are not to scale and do not represent detailed images of the respective products.