




SKINDICHT® SR-SV-M

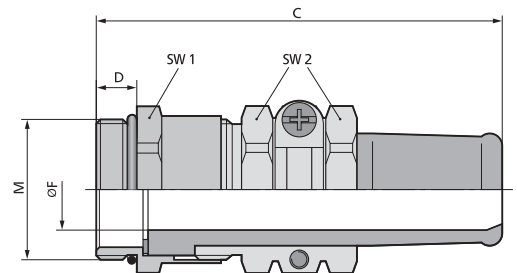

Benefits

- For high temperatures
- Resistant to oils, solvents, acids and chemicals
- Seawater-resistant
- High strain relief
- Robust

Application range

- Cables for electrical appliances and machinery that are moved under normal use must be protected against excessive bending as required in accordance with VDE 0700-1
- Special cable gland with FKM anti-kink sleeve. Our own reinforced acid-resistant FKM receptacle does not show any effects of aging even after an extended period of use at a temperature of +165°C.
- Machine and turbine manufacturing
- Power plant engineering
- Laboratory

Product Make-up

- Metric connection thread acc. to DIN EN 60423
- Basis for technical information DIN IEC 62444

Note

- Counter nut to be used: SKINDICHT® SM-M
- EMC version is available upon request
- Example description: SR-SV-M 20/11/7
20 = metric connection thread
11 = PG function thread
7 = clear opening of seal

Technical data

- Classification ETIM 5/6**
ETIM 5.0/6.0 Class-ID: EC000441
ETIM 5.0/6.0 Class-Description: Cable screw gland
- Caution**
The installation dimensions can be found in appendix T21
- On request**
Available with long connection thread
- Material**
Body: nickel-plated brass
O-ring: FKM
Anti-kink protection: FKM
- Protection rating**
IP 65
- Temperature range**
-15°C to +165°C

Article number	Article designation / size	Clamping range ØF (mm)	Max. fitting size for installation (mm)	Function thread PG	SW1/SW2 mm	Overall length, C (mm)	Thread length, D (mm)	Clear opening F (mm)	Pieces / PU
SKINDICHT® SR-SV-M									
52105820	M 20 x 1,5	5,5 - 7,0	28	11	22 / 20	56,0	6	7	25
52105830	M 20 x 1,5	7,5 - 9,0	28	11	22 / 20	56,0	6	9	25
52105840	M 20 x 1,5	7,5 - 9,0	32	13,5	22 / 22	61,5	6	9	25
52105850	M 20 x 1,5	8,5 - 11,0	32	13,5	22 / 22	61,5	6	11	25
52105860	M 20 x 1,5	10,5 - 13,0	32	13,5	22 / 22	61,5	6	13	25
52105870	M 20 x 1,5	11,0 - 13,0	35	16	24 / 24	66,5	6	13	10
52105880	M 20 x 1,5	12,0 - 15,0	35	16	24 / 24	66,5	6	15	10
52105890	M 25 x 1,5	13,5 - 15,0	40	21	30 / 30	79,0	7	15	10
52105900	M 25 x 1,5	15,5 - 17,0	46	21	30 / 30	79,0	7	17	10
52105910	M 25 x 1,5	16,5 - 19,0	46	21	30 / 30	79,0	7	19	10

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Accessories

- SKINDICHT® SM-M refer to page 744