



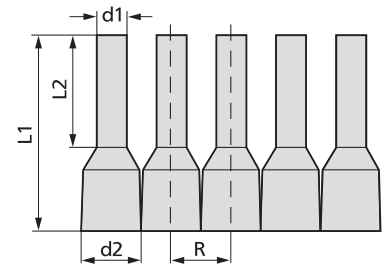

DIN-Coil conductor end sleeves

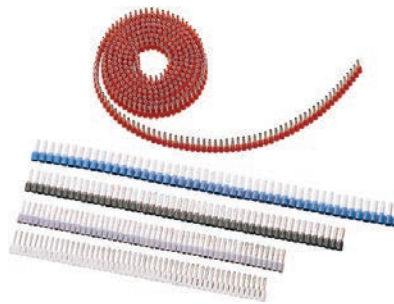

Application range

- Insulated conductor end sleeves in strips, DIN 46228, Part 4
- DIN strips, available in coils of up to 3000 items for working with automatic crimping machines

Included

- Coil diameter: approx. 25 cm

Technical data

Classification ETIM 5/6
 ETIM 5.0/6.0 Class-ID: EC000005
 ETIM 5.0/6.0 Class-Description: Cable end sleeve

Material
 Copper/PP
 Surface: tin-plated

Temperature range
 Permanent load -5°C up to +105°C,
 temporary load +120°C

Article number	Article designation	For mm ²	Colour	l1 mm	l2 mm	d1 mm	d2 mm	R mm	Contents (unit)
DIN-Coil conductor end sleeves									
61802052	DIN coil 0.5	0.50	white	14.5	8	1.1	2.6	3.5	3,000 x 1
61802054	DIN coil 0.75	0.75	grey	14.5	8	1.3	2.8	3.6	3,000 x 1
61802056	DIN coil 1.0	1.00	red	14.5	8	1.5	3	3.9	3,000 x 1
61802058	DIN coil 1.5	1.50	black	14.5	8	1.8	3.4	4.2	2,500 x 1
61802060	DIN coil 2.5	2.50	blue	14.5	8	2.3	4.2	5	1,500 x 1

Photographs and graphics are not to scale and do not represent detailed images of the respective products.



DIN-strips for QUADRO



Benefits

- Insulated conductor end sleeves in strips, DIN 46228, Part 4 for QUADRO

Suitable tools

- QUADRO multifunction tool refer to page 998

Technical data

Classification ETIM 5/6
 ETIM 5.0/6.0 Class-ID: EC000005
 ETIM 5.0/6.0 Class-Description: Cable end sleeve

Article number	Article designation	For mm ²	AWG	Colour	l1 mm	l2 mm	d1 mm	d2 mm	R mm	Pieces / PU
DIN-strips for QUADRO										
61805170	DIN Strips 0,50	0.50	20	white	14	8	1.1	2.6	3.5	500
61805180	DIN Strips 0,75	0.75	20	grey	14	8	1.3	2.8	3.6	500
61805190	DIN Strips 1,00	1.00	18	red	14	8	1.5	3	3.9	500
61805200	DIN Strips 1,50	1.50	16	black	14	8	1.8	3.4	4.2	500
61805210	DIN Strips 2,50	2.50	14	blue	14	8	2.3	4.2	5	500

Other sizes and colours are available upon request.

Photographs and graphics are not to scale and do not represent detailed images of the respective products.