

Data sheet

Commercial Art.No.: R1.188.3480.0

stand still monitor SNS 4084K-A DC 24V 99 HZ

Zero-speed monitor (Frequency range 0.5 - 99 Hz) with start-up-bridging- function, automatic-/ manual reset with reset-button monitoring, 4 safe semiconductor outputs, DC 24 V, screw terminals pluggable



Commercial Art.No.	R1.188.3480.0
EAN	4046521310811
Order Unit	1

certificates / approvals



Technical data

general

function display	12 LED, green/red
creepage distances and clearances between the circuits	EN 60664-1
protection degree according to DIN EN 60529 (housing)	IP40
protection degree according to DIN EN 60529 (terminals)	IP20
ambient temperature min.	-25 °C
ambient temperature max.	55 °C
wire ranges screw terminals, fine-stranded / solid	1 x 0.2 mm ² - 2.5 mm ² / 2 x 0.2 mm ² - 1.0 mm ²
wire ranges screw terminals, fine-stranded with ferrules	1 x 0.25 mm ² - 2.5 mm ² / 2 x 0.25 mm ² - 1.0 mm ²
permissible torque min.	0.5 Nm
permissible torque max.	0.6 Nm
tightening moment	0.6 Nm
weight	0.16 kg
standards	EN ISO 13849-1EN 62061; EN 62061
suitable for safety functions	yes
with muting function	no
feedback circuit	yes
start contact	yes
stop category acc. to IEC 60204	0
rail mounting possible	yes

connection data

detachable clamps	yes
type of electric connection	screw connection

safety parameters

category (ISO 13849-1)	4
PL (ISO 13849-1)	level e
SIL _{CL} (IEC 62061)	3
PFD _d (Low demand mode)	2.2 E-5
PFH _d (High demand mode)	5 E-9 1/h
HFT	1
DC	96 %
MTTF _d	300 a
T _M	20 a
proof test intervall (High demand mode)	20 a

application

model	basic device
suitable for monitoring of magnetic switches	no
suitable for monitoring of proximity switches	yes

output circuit

enabling paths	solid state (plus), safe output
signaling paths	solid state (plus), not safe
rated switching voltage, enabling paths DC	30 V
max. thermal current I _{th} , enabling paths	2 A
max. total current I ² of all current path	4 A ²
short-circuit protection (NO), max. fuse insert	short-circuit proof
outputs, signalling function, undelayed, with contact	2
outputs, safe, undelayed, with contact	4

control circuit

nominal output voltage DC	24 V
input current (safety circuit / reset circuit)	3 mA
max. peak current (safety circuit / reset circuit)	3.8 mA
min. switch-on time	100 ms
recovery time t _W	> 100 ms
max. resistivity, per channel	100 m
evaluation inputs	2-channel

supply circuit

nominal voltage UN	DC 24 V
rated consumption DC	1.8 W
electrical isolation supply circuit - control circuit	no
min. rated DC voltage for controls	20.4 V
max. rated DC voltage for controls	30 V

dimensions

depth	114 mm
width	22.5 mm
height	96.5 mm

classification

ECLASS 11	
ECLASS 8.1	27371811
ETIM 9.0	EC001448
ETIM 8.0	EC001448
ETIM 7.0	EC001448
ETIM 6.0	EC001448
ETIM 5.0	EC001448

product compliance

ROHS conformity status	compliant/exempted
ROHS exceptions	III-6(c); III-7(c)I
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Lead
REACH-SVHC CAS numbers	7439-92-1

Teile Nr. / Part No.
R1.188.0460.0
R1.188.0470.0
R1.188.0480.0
R1.188.0490.0
R1.188.0500.1
R1.188.0530.1
R1.188.0590.0
R1.188.0620.0
R1.188.0640.0
R1.188.0660.0
R1.188.0680.0
R1.188.0700.2
R1.188.0720.2
R1.188.0900.1
R1.188.0910.1
R1.188.0940.1
R1.188.0950.1
R1.188.0990.0
R1.188.1000.0
R1.188.1010.0
R1.188.1050.0
R1.188.1060.0
R1.188.1070.0
R1.188.1120.0
R1.188.1280.0
R1.188.1340.0
R1.188.1440.0
R1.188.1450.0
R1.188.1460.0
R1.188.1480.0
R1.188.1810.0
R1.188.1820.0
R1.188.1830.0

©


Teile Nr. / Part No.
R1.188.1840.0
R1.188.1850.0
R1.188.1860.0
R1.188.1870.0
R1.188.1880.0
R1.188.1890.0
R1.188.1900.0
R1.188.1910.0
R1.188.1920.0
R1.188.1930.0
R1.188.3250.0
R1.188.3290.0
R1.188.3360.0
R1.188.3480.0
R1.188.3580.0
R1.188.3590.0
R1.188.3620.0
R1.188.3640.0
R1.188.3660.0
R1.188.3710.0
R1.188.3810.0
R1.188.3830.0
R1.188.3840.0
R1.188.3910.0
R1.188.3930.0
R1.188.4020.0
R1.188.4100.0
R1.188.4110.0
R1.188.4120.0
81.030.0100.0
81.030.0101.0
81.030.0110.0
81.030.0111.0

ⓔ

ⓐ

ⓑ

ⓓ

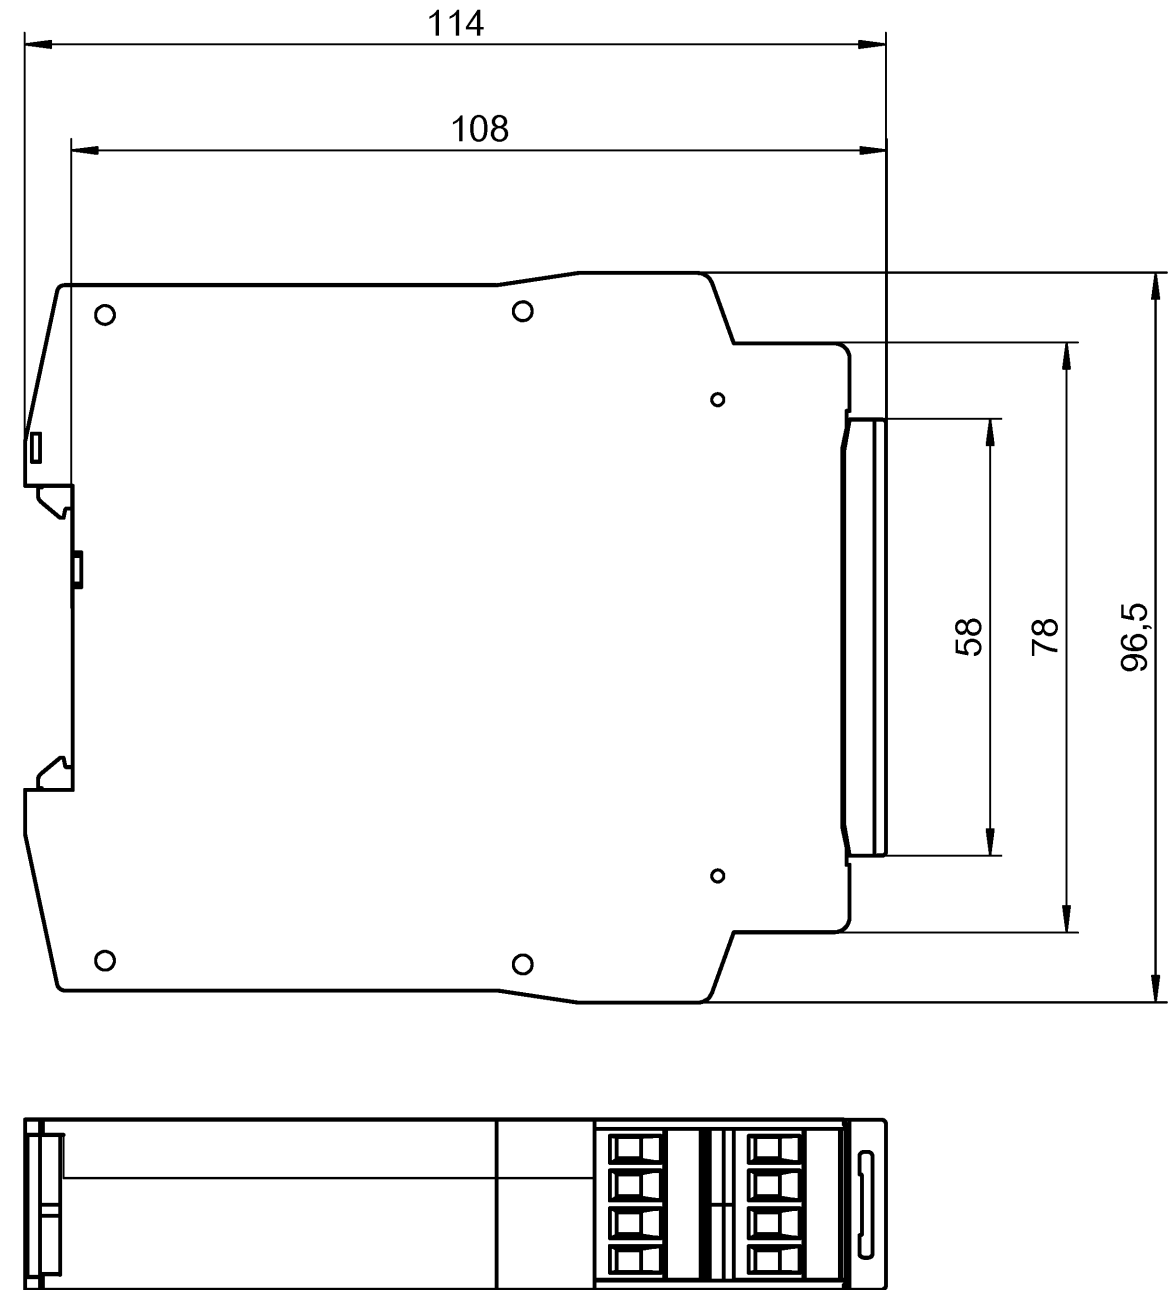

Weitere Angaben siehe KATALOG oder eKatalog. Additional data see CATALOG or eCatalog. www.wieland-electric.com eshop.wieland-electric.com

ja/yes <input type="checkbox"/> Stoffverbots- und Deklarationsliste nach WN 5020.010 ist einzuhalten. Conformity with Wieland document WN 5020.010 e (list of prohibited / declarable hazardous substances) to be declared!		1. Verwendung: First Use:		Blatt: Sheet:	
Freitoleranz nach General tolerance		CAD-Zeichnung, keine manuellen Änderungen CAD-Drawing, no manual modifications allowed		Zeichnung Nr./ Drawing No. T R1.188.0460.0 01K	
Werkstoff/ Material		2014 gezeichnet drawn	Tag/ Date 06.06.	Name Kötzner	
ⓔ	22.04.16	Maßstab/Scale	Maße in mm/Dimensions are in mm		
ⓓ	17.03.15	Datei/ File: 030181_E01K.DCD			
ⓐ	03.02.15	Ersatz für/ Replacement for:			
ⓑ	04.07.14	Type		Benennung/ Title	
ⓓ	25.06.14	Benennung/ Title		Maßbildzeichnung/dimension drawing Standardgehäuse u. -deckel, Baubreite 22,5mm, Schraubenklemmen steckbar standard housing and cover, overall with 22,5mm plug-in pcb terminal	
Index	Datum/ Blatt Date/ Sheet	www.wieland-electric.com			
Änderung/ Revision					

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
M1
M2
M3
L
G
i
11.1
12.1
1.1